



IFE+ 65" 4K INTERACTIVE DISPLAY



20 POINT IR TOUCH

4K

4K UHD



16/7 USAGE




ANTI-REFLECTIVE

VESTEL

Interactive **20 point touch** solution, designed as a perfect companion in collaborative learning.

IFE+

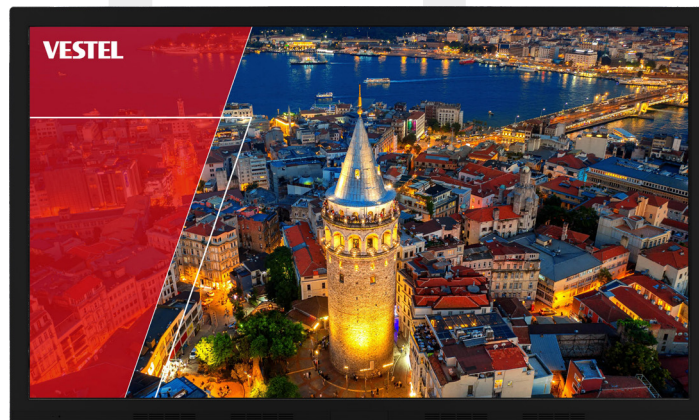

IFE+ 65" 4K INTERACTIVE DISPLAY



20 POINT IR TOUCH



4K UHD



16/7 USAGE



ANTI-REFLECTIVE




ANDROID 9.0



OPS SLOT



WHITE BOARD



2 X HDMI INPUTS

PANEL	
	IFE+ 65
Screen Size	65"
Backlight Type	DLED
Brightness (typ.)	350 cd/m ²
Native Resolution	3840x2160 UHD (HDR)
Contrast Ratio (typ.)	4000:1
Dynamic Contrast	40000:1
Panel Lifetime (min.)	30000 Hours
Response Time (typ.)	8 ms
Active Area (HxV)	1429x804 mm
Viewing Angle	178 Vertical, 178 Horizontal
Colour Value	16.7M (8-Bit)
Screen Treatment	4mm Tempered Anti Glare
Haze Level	8%
Refresh Rate	60Hz
Orientation	Horizontal
Operation Hours	16/7
Area of Usage	Indoor
TOUCH TECHNOLOGY	
	IFE+ 65
Type	Infrared (IR) Technology
Supported Points	20 Points - Application Dependant
Sensitivity	Any touch with finger, gloved hand or pointer
Connectivity	USB A
Supported OS	Windows®, Mac® OS, Linux, Android
Response Time	< 5 ms
Touch Accuracy	*+/- 1 mm (over 90% area)
Pen Type	Battery-Less Pen
Object Sizes for Touch	2.8mm and 10mm
SYSTEM	
	IFE+ 65
OS	Android 9.0
CPU	CA55 Quad core
GPU	Mali-G31 MP2
Memory	16GB EMMC
Storage	2GB
Wired	10/100 Mbps Ethernet
Wireless	Wi-Fi 5 (802.11 a/b/g/n/ac)
USER EXPERIENCE	
	IFE+ 65
Home Page	Personalized Background, Home buttons, Navigation bar, Quick Palette
Applications	Whiteboard, Web browser, File Manager, Media Player, Quick Tools
Others	Freeze Screen, Screen Lock, Dual Pen Recognition, Palm Erase, Annotation

REAR/SIDE INPUTS	
	IFE+ 65
Video Input	2 x HDMI
Video Output	1 x HDMI
Audio Output	Headphone (Line-out)
External Control	Ethernet(RJ45), Service(RJ12)
Others	OPS Slot, 2 x USB-A (Media player)
MECHANICAL	
	IFE+ 65
Front Features	Front Control Panel, Built in IR sensor, Touch Function Toggle
Product Dimensions	1525 x 115 x 915 mm
Packaging Dimensions	1756 x 265 x 1100 mm
Product Weight	41.5Kg
Packed Weight	46.0Kg
VESA Mounting	400 x 400 mm M6
ENVIRONMENTAL CONDITIONS	
	IFE+ 65
Bezel Width	B:56 T:41 L/R: 41mm
Operating Temperature	0-40 Degrees C
POWER	
	IFE+ 65
Operating Humidity	10-90%
Supply	110 VAC - 240 VAC
Power Consumption (Typical)	146W
Deep Standby	≤0.5 W
Speaker	2 x 12W
OTHER	
	IFE+ 65
Accessories	Owners Manual, Remote Control, Batteries, Wall Mounting Kit, Pen, Detachable Power Cable

greenmonkey^{AV}

Website: www.gmav.co.uk

Email: sales@gmav.co.uk

Telephone: 0161 850 9696