

SLIMLINE 24V BARLED

Works with 24V Constant Voltage LED Driver (Sold Separately)



Promolux Installed:



IDEAL FOR

Service & Multi-Deck: Meat, Seafood, Dairy, Deli & Prepared Foods, Floral, Produce, Bakery, Salad Bars & Ice Cream/Gelato

SPECIFICATIONS

Connectable in a Series up to 150W
IP65


226° Beam Angle
CRI: > 80
High R9 & R12 Values
Power Factor: > 0.9
Rated Life: 50 000 hrs
Voltage Input: 24V
Chips: 2835
Color: Platinum

Size	Model Number	Watts	Type	Length (mm) (Nominal)	Length (in) (Nominal)	Lumens	Lumens per Watt
1ft	SB-PL-10C	4	Canopy	254	10	310	78
2ft	SB-PL-22C	10	Canopy	549	22	860	78
3ft	SB-PL-34C	14	Canopy	849	34	1300	81
4ft	SB-PL-46C	14	Canopy	1149	46	1800	82
5ft	SB-PL-58C	22	Canopy	1449	58	2200	80
3ft	SB-PL-34S	7	Shelf	849	34	1080	98
4ft	SB-PL-46S	9	Shelf	1149	46	1320	94
5ft	SB-PL-58S	11	Shelf	1449	58	990	90


ACCESSORIES

1. Mounting Screws
2. 0° Mounting Clip
3. 30° Mounting Clip
4. 45° Mounting Clip
5. 60° Mounting Clip
6. Mounting Magnets
7. Power Cord
8. Connector Cord/Jumper
9. M to F DC 5mm Power Splitter
10. M to F 39" DC 5mm Extnsn Cord
11. M to F 8" DC 5mm Extnsn Cord
12. Rotatable Metal Clips (2-Pack)

Included

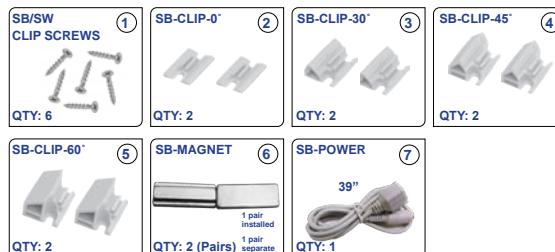

Optional Purchase

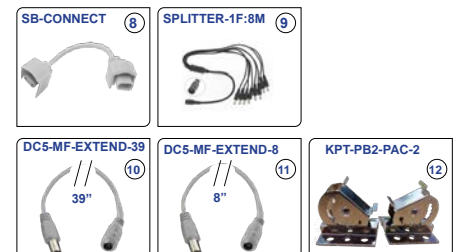

www.promolux.com • info@promolux.com • 1.250.743.1222 • 1.800.519.1222

Specifications subject to change without notice. Contact us for more information.