

Sure Shot TS – Foosball Table

Assembly Instructions



Performance Games Inc.®

WWW.PERFORMANCEGAMESINC.COM

PHONE: 248.705.5395 ■ EMAIL:

TODD@PERFORMANCEGAMESINC.COM

4058 Dixie Highway ■ Saginaw, Michigan 48601


Congratulations on your purchase of the Sure Shot series home entertainment table. We want to ensure that you are completely satisfied with your purchase. So, please feel free to contact your dealer for assistance with your new product or any other information you may want or need.

TOOLS NEEDED FOR ASSEMBLY:

- Wrench
- Philips Head Screw Driver
- Level
- Hammer

CONTENTS

Item	Qty
Cabinet	1
Legs	4
Accessory Package	1
Assembly Instructions	1

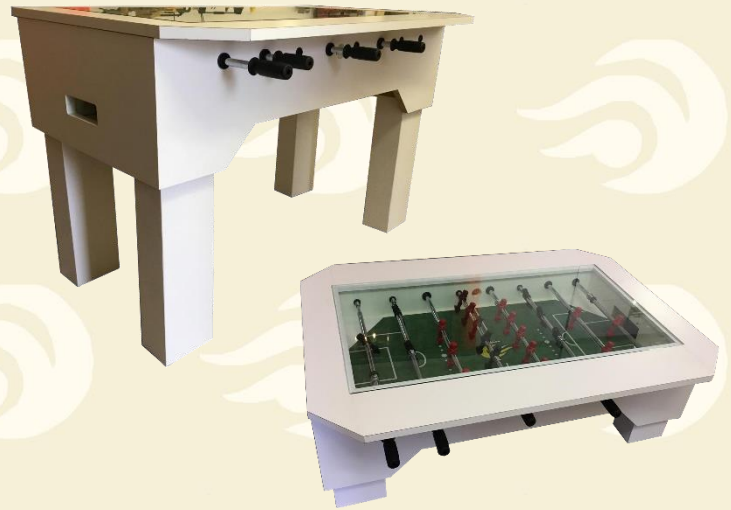

Be sure to verify that all of the items listed above are included in the box before starting assembly.

ASSEMBLY PROCEDURE

DUE TO THE WEIGHT AND SIZE OF THE TABLE, IT IS RECOMMENDED THAT (2) PEOPLE ASSEMBLE THE TABLE TOGETHER.

STEP ONE:

- Carefully lift the cabinet out of the box and lay it on its top, placing it on a clean and smooth surface to avoid scratching the finish
- Remove the legs from the box and locate the accessories package.

STEP TWO:

- Assemble the legs by inserting the leg's threaded studs into and through the mounting pad. Then, insert a bolt with washer through the leg into inside cabinet insert.
- Secure with (1) washer and (1) nut on each stud.
- Tighten until nuts are flush with the surface
- Repeat this process on each leg.

STEP THREE:

- Check that all the leg levelers are screwed all the way into the legs.
- Carefully lift up and rotate the table onto its legs
DO NOT ALLOW WEIGHT OF TABLE TO ROCK ON ANY ONE OR TWO LEGS ALONE *
*We recommend (2) or more people lift the table together.

STEP FOUR: (for use only with non-telescoping rods. Skip with telescoping rods)

- Locate the (2) 5-man rods. These rods will be placed in the center of the game.
- The men are attached to the rods with a slight press fit in order to maximize their playability.
- Place (1) 5-man rod through the bushing hole in one of the walls; handle end first.
- Then, slide the rod through the bushing hole in the far wall.
 - Once that is done, put the two bushing halves together around the rod and slide them in the cabinet.
 - Then, put the nut over the handle end of the rods and tighten until nut is tight to the outside of cabinet.
- Repeat this operation for the other 5-man rods as well as the 3-man, 2-man and goalie rods.

NOTE: The 3-man and the goalie rods both have 3 holes. The goalie rod is the shorter rod.

NOTE: The black and red men face in opposite directions.

STEP FIVE:

- Adjust the leg levelers until the ball rolls true on the playing surface.
- For more precise leveling, use a level.
- Place the level horizontally on the playing surface pointing towards the goal openings.
- Check that all the levelers are screwed all the way in as a starting point.
- Evenly adjust the leg levelers on one end until you are horizontally level.
- Turn the level 90 degrees so it is pointing towards the ball server holes.
- Evenly adjust the levelers on one side of the table until it is vertically level.

STEP SIX:

- Push the rods away from you until the bumpers hit the opposite wall.
- Apply 2 or 3 drops of lubricant to each rod while rotating and pulling it towards you to evenly spread the lubricant. Perform the same operation on the opposite side of the rod to cover both sides of the attached men.
- Repeat as needed.

**Specifications subject to change without notice.*



Fun starts here