


FOR RoHS

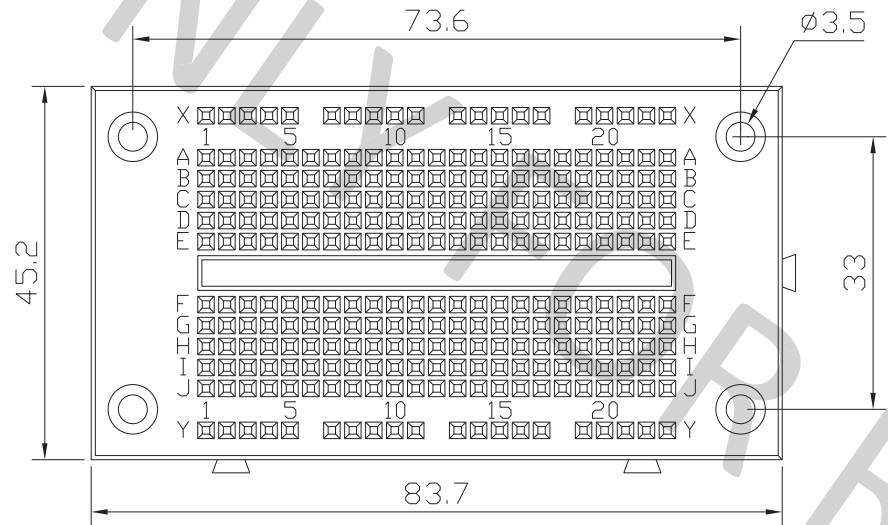

SOLDERLESS BREADBOARD

BOARD: **EXP-350E**
 MATERIAL: ABS, Plastic
 SURFACE: Colored

SPRING CLIP
 CONTACT: Phosphor Bronze
 FINISH: Nickel Plated
 INSERTION RANGE: 0.4–0.7mm
 PACKING: Blister

EXP-350E

- Board: 83.7*45.2*8.5(mm)
- Tie-point 270

公差为±0.20mm

Global Specialties

TITLE: **EXP-350E**

PART NO:

DWG NO: 071100

TOLERANCE			
X. ±			
.X ±			
.XX ±	A	NEW RELEASE	Jul.11.16'
.XXX ±	REV.	DESCRIPTION	DATE

APPD:	MAT'L:
CHKD:	BODY:
DRWN: Xu Shurong	CLIENT:

	UNITS	SCALE	SHEET
	mm	1:1	1/1

EXP-350E

Solderless Breadboard, 270 Tie-Points

Solderless Breadboards

Phosphor bronze contacts

High impact plastic



Overview:

The EXP-350E offers molded interlocking edge rails on all four sides to permit parallel or perpendicular socket arrays, allowing more boards to be added at any point for maximum circuit design flexibility. The EXP-350E utilizes 0.3" DIP spacing and the molded-in mounting holes allow for either front or rear mounting. There is a heavy-duty Mylar backing to prevent short circuits. The integrated bus strips allow for fast connections to power and signal lines. Made from high impact plastic with phosphor bronze contacts, the EXP-350E is built for quality and performance.

Specifications

Type	Solderless Breadboard
Tie-Points	270
Terminal Clips	54
Breadboard Material	ABS
Spring Clip Material	Nickel plated phosphor bronze
Length	3.25 in
Width	1.75 in
Depth	8 mm (0.33 in)
Assembly	NA
Current Capacity	1.5 A, 36 V
16-Pin IC Capacity	3



WARRANTY



Innovative Training Solutions

globalspecialties.com