

Relied upon since 1969



BI-LOK

The laser printed Bi-Lok seal enables multiple unique fastening options and provides high security against tampering.

Key Features

- Easy to apply adjustable strap seal.
- · Round tail for smooth insertion.
- Unique sequential serial numbering.
- Mats of 5.

Material

Polypropylene Internal metal clip (sheet metal)

Unit Dimensions

Overall length: 228 mm Operational length 153 mm Flag: 24 x 12 x 0.9 mm


Carton (1000 units)

Size 370 x 195 x 160 mm Weight: 2.3 kg

Strength Characteristics

Tests conducted at room temperature indicate a 9-11 kg pull strength.



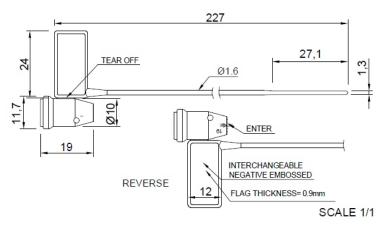

Code	Description
BR66114	BI-LOK - Numbered - Yellow

Closure options: Ring style (united body and flag) or separate body and flag closure that allows the seal to be adjustled longitudinally. To seal place the tip of the tail in the orifice, showing the text enter. Push the tail through, it will emerge from the other side. Continue pushing until what you are sealing is secured.

Applications: Suitable for a wide range of applications, some typical applications include metrology for sealing of water and electricity meters.



NSW +61 (0) 2 9454 4200 VIC +61 (0) 3 8581 9100 QLD +61 (0) 7 3209 8225 WA +61 (0) 8 9443 9010 harcor.com.au SPEC-V858