

Relied upon since 1969

ECO Fixed Length Ring Seal

Features

- Locking chamber ensures effective sealing engagement (twist-and-pull).
- Ten seals per mat.
- Polypropylene material blushes if tampering occurs.
- Easy removal due to break point.

Material

Body - Polypropylene
Chamber - Polyacetal

Dimensions


Overall length: 212mm
Operational length: 180mm
Strap width: 8mm
Strap thickness: 1.2mm

Carton (1000 units)

Size: 280mm x 223mm x 286mm
Weight: 3.5kg

Strength Characteristics

Average looped pull apart force is 18kg to 22kg

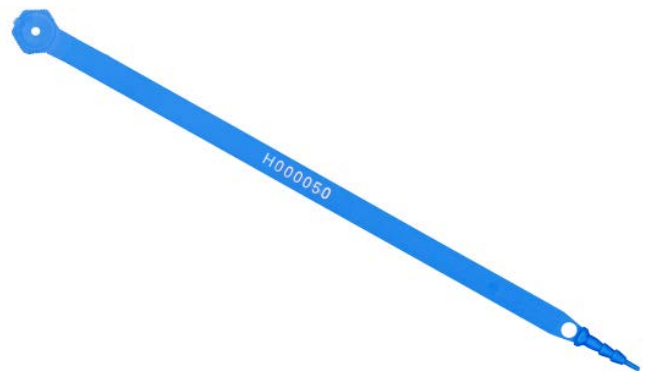

ECO FIXED LENGTH SEAL - NUMBERED

MOQ 1,000 - Sold in multiples of 1,000

SS30102 - Blue

ECO FIXED LENGTH SEAL - CUSTOM OPTIONS

MOQ 50,000 - Sold in multiples of 1,000

One colour logo
Laser marking
Hot Stamping
Laser Barcoding
Sequential Numbering

ECO Fixed Length Ring Seal



APPLICATIONS

- Fire Doors • Doors (roll-up or swing-out) • Hatches • Enclosures • Gates • Tote Boxes
- Warehouse • Refineries • Nursery / Landscaping