
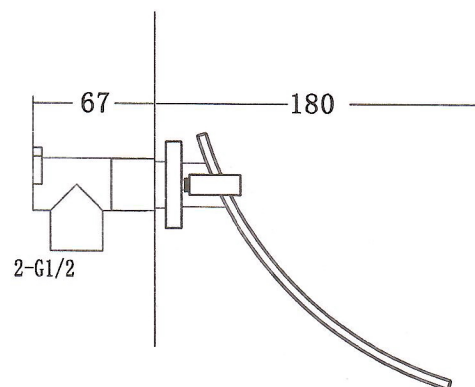
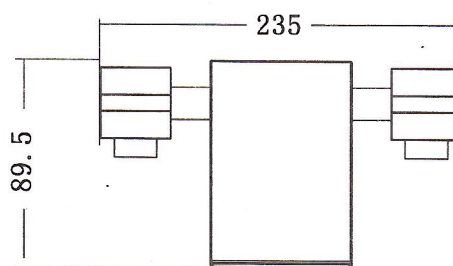


Installation instructions (B)

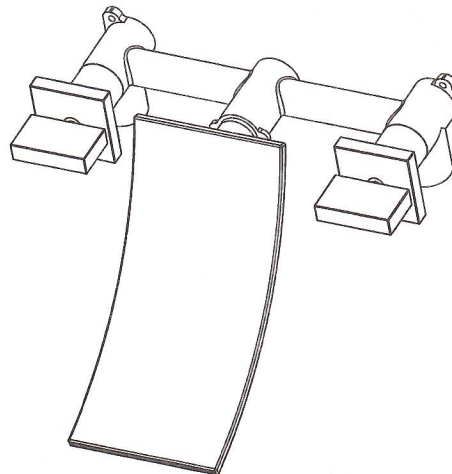

Installation instructions (A)

1. Please read this instructions before installing product;
2. Check the product good or not after open the box, the tools required for installation are not supplied with the goods, please prepare them by yourself;
3. The instructions contain precautions for installation. Please keep them properly;
4. The dimension drawings of the manual is for reference only, please take the real object as the standard.


Recommended tools:




Teflon Tape



Allen Key




Slotted Screwdriver
Phillips Screwdriver

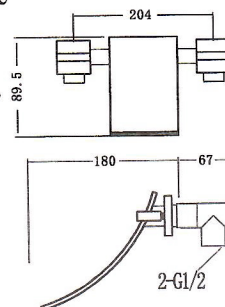

1. The sundries at the connection must be removed before installation to avoid blockage or leakage;
2. Connect the inlet pipes correctly (left for hot, right for cold)
3. The maximum temperature of hot water shall not be higher than 80°C


1)




hot water

cold water

The bottom of the body is flush with the inner wall, and the flange is flush with the ceramic tile surface



During embedding the wall, please do not remove the protective cover to avoid any damage of the body.



ceramic
tile surface

Interior
wall

2) After embedding the wall, please install them as followings:

1. Remove the protective cover;
2. Fix the cover;
3. Install handles and spout.

