




# ProSeries Security and Life Safety Sensors

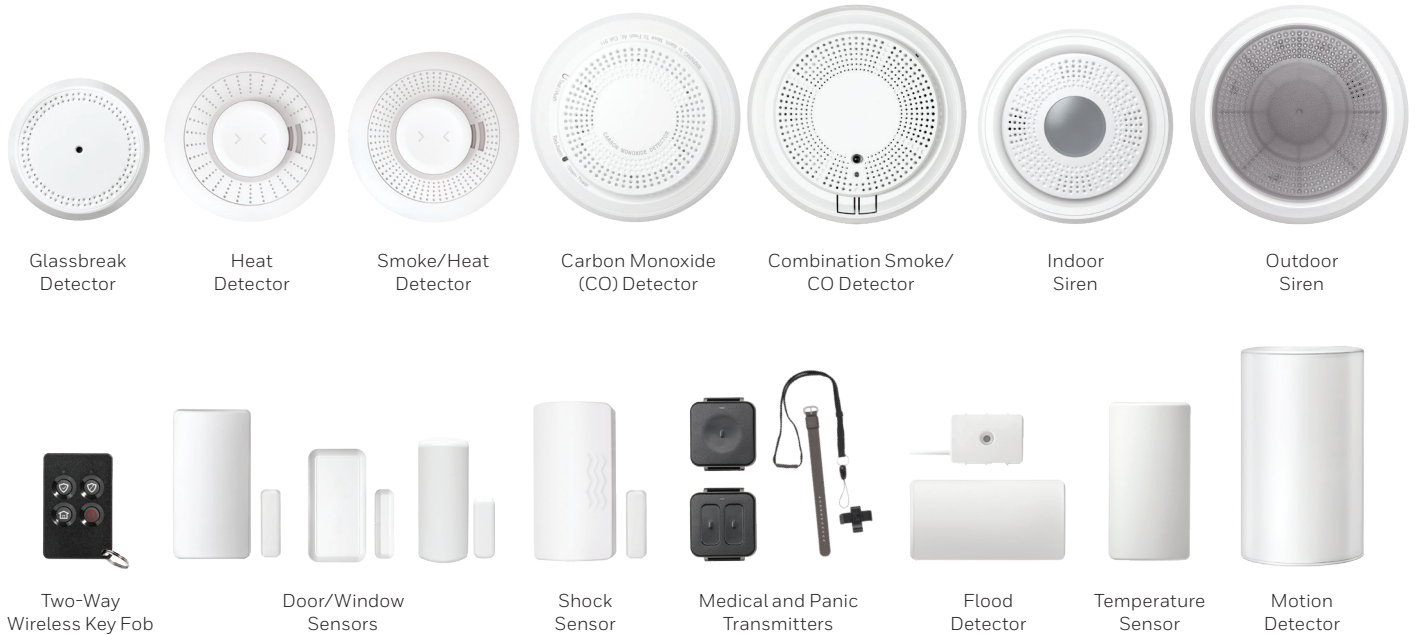

PROSiX is the next generation wireless technology for security and the connected home. With its innovative technology and superior performance, PROSiX enables faster installation, easier troubleshooting, remote diagnostics and increased RMR. Its encrypted transmission ensures the highest level of data security.

Compatible with the Resideo ProSeries platform, PROSiX technology is available in a broad selection of devices for intrusion, life safety, property protection, as well as in wearables, giving users immediate and convenient access to important system functions.

## FEATURES AND BENEFITS

### Simple and Quick Install

- Speeds up installation and eliminates errors with sensor's battery pull-tab, auto-enrollment and no-touch adjustment
- Reduces on-site visits with remote configuration

### Easy to Maintain

- Use System Health Check to proactively troubleshoot by monitoring device signal strength, sensor settings, and battery life anytime, anywhere

### Secure Encryption

- Employs 128-bit AES encryption for a high level of security

### Anti-Takeover

- Helps prevent competitive account takeovers and conversions as SiX devices, when enabled, are locked into panels and must be unpaired by the installing dealer to be used again

### One-Go-All-Go Interconnected Life Safety

- If one life safety device goes into alarm mode (Smoke/Heat/CO), all other associated life safety devices, including sirens, will sound to alert occupants

### Fewer Truck Rolls

- Reduces truck rolls with user-replaceable batteries and the ability to remotely adjust sensor parameters and download software updates

# ProSeries Security and Life Safety Sensors Technical Specifications

## INTRUSION SENSORS



### Door/Window Sensor

#### PROSIXCT

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Magnet Spacing Gap\*:** 1.0 in (25.4 mm)  
**Auxiliary Input Terminal:** Yes  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):**  
**Sensor:** 1.1 in x 1.6 in x 3.1 in (27.9 mm x 40.6 mm x 78.7 mm)  
**Magnet:** 0.6 in x 0.4 in x 1.4 in (15.2 mm x 10.2 mm x 35.6 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 634, Certified to ULC/ORD-C634  
**Other Standards:** RoHS



### Mini Door/Window Sensor

#### PROSIXMINI2

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Bluefield™ Technology:** LED indication when magnet is within range of sensor  
**Magnet Spacing Gap\*:** 1.0 in (25.4 mm)  
**Auxiliary Input Terminal:** No  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR2 Lithium Battery, Qty 1 (Panasonic CR2, Duracell CR2, Energizer CR2 or Evergreen CR2)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):**  
**Sensor:** 0.8 in x 1.2 in x 2.9 in (20.3 mm x 30.5 mm x 73.7 mm)  
**Magnet:** 0.3 in x 0.4 in x 1.5 in (7.6 mm x 10.2 mm x 38.1 mm)  
**Approval Listings:** FCC/IC, ETL Listed to UL 634, cETLus Listed to ULC/ORD-C634  
**Other Standards:** RoHS

Covers and magnets also available in brown and black.



### Mini Door/Window Sensor (Flat style)

#### PROSIXMINI

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Magnet Spacing Gap\*:** 1.0 in (25.4 mm)  
**Auxiliary Input Terminal:** No  
**Transmission Range\*:** 200 ft (61 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR2450 Lithium Coin Cell Battery, Qty 1 (Duracell DL2450, Panasonic CR2450 or Energizer CR2450)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):**  
**Sensor:** 0.5 in x 1.3 in x 2.4 in (12.7 mm x 33.0 mm x 61.0 mm)  
**Magnet:** 0.4 in x 0.4 in x 1.5 in (10.2 mm x 10.2 mm x 38.1 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 634, Certified to ULC/ORD-C634  
**Other Standards:** RoHS



### Motion Detector

#### PROSIXPIR

**Mounting Hardware:** Included  
**Detection Pattern:** 40 ft x 56 ft (12 m x 17 m)  
**LED Indicators:** Yes  
**Temperature Compensation:** Yes  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x D):** 4.1 in x 2.4 in x 1.6 in (104.1 mm x 61.0 mm x 40.6 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 639, Certified to ULC-S306-03  
**Other Standards:** SIA-PIR-01, RoHS

# ProSeries Security and Life Safety Sensors Technical Specifications

## INTRUSION SENSORS (CONTINUED)



### Shock Sensor

#### PROSIXSHOCK

**Mounting Hardware:** Included  
**Shock Sensitivity:** Multi-directional  
**LED Indicators:** Yes  
**Magnet Spacing Gap<sup>†</sup>:** < 0.95 in (24.1 mm)  
**Auxiliary Input Terminal:** Yes  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderrui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):**  
**Sensor:** 1.1 in x 1.6 in x 3.1 in (27.9 mm x 40.6 mm x 78.7 mm)  
**Magnet:** 0.6 in x 0.4 in x 1.4 in (15.2 mm x 10.2 mm x 35.6 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 634, Certified to ULC-C634, ULC S306  
**Other Standards:** RoHS



### Temperature Sensor

#### PROSIXTEMP

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**2-Zone Trigger Temperature:** Cold: below 45 °F (7 °C)/Hot: above 95 °F (35 °C)  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderrui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):** 1.1 in x 1.6 in x 3.1 in (27.9 mm x 40.6 mm x 78.7 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to ANSI/UL 873 and ANSI/UL 2017, Certified to CAN/CSA STD C22.2 #205  
**Other Standards:** RoHS



### Glassbreak Detector

#### PROSIXGB

**Mounting Hardware:** Included  
**Detection Range:** 25 ft (7.6 m)  
**LED Indicators:** Yes  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderrui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 3.8 in x 1.1 in (96.5 mm x 27.9 mm)  
**Approval Listings:** FCC/IC, cETLus Listed to UL 639, Certified to ULC-S306  
**Other Standards:** RoHS

## FLOOD/LEAK DETECTION



### Flood Detector

#### PROSIXFLOOD

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 1 (Panasonic CR123A, Duracell DL123A or Huiderrui CR123A)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):**  
**Sensor:** 1.1 in x 1.6 in x 3.1 in (27.9 mm x 40.6 mm x 78.7 mm)  
**Probe:** 0.4 in x 1.5 in x 1.0 in (10.2 mm x 38.1 mm x 25.4 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to ANSI/UL 2017, Certified to CAN/CSA STD C22.2 #205  
**Other Standards:** RoHS

# ProSeries Security and Life Safety Sensors Technical Specifications

## LIFE SAFETY SENSORS



### Combination Smoke/Carbon Monoxide (CO) Detector

#### PROSIXCOMBO / PROSIXCOMBOC (Canada)

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**360° LED Ring:** Yes  
**Voice Annunciation:** English/Spanish or English/French (Canada version only)  
**Audible Signal:** 85 dBA  
**Heat Detection:**  $\geq 135^{\circ}\text{F}$  ( $57^{\circ}\text{C}$ )  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 4 (Panasonic CR123A only)

**Operating Temperature:**  $32^{\circ}\text{F}$  to  $100^{\circ}\text{F}$  ( $0^{\circ}\text{C}$  to  $38^{\circ}\text{C}$ )  
**Storage Temperature:**  $14^{\circ}\text{F}$  to  $158^{\circ}\text{F}$  ( $-10^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ )  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 6.3 in x 2.0 in (160.0 mm x 50.8 mm)  
**Approval Listings:** FCC/IC, ETL Listed to UL 268 and UL 2075 (US version); cETL Certified to ULC S531 and CSA 6.19 (Canada version)  
**Other Standards:** RoHS  
**One-Go-All-Go:** Yes



### Carbon Monoxide (CO) Detector

#### PROSIXCO / PROSIXCOCN (Canada)

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Audible Signal:** 85 dBA  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 2 (Panasonic CR123A, Duracell DL123A or Duracell DL123)

**Operating Temperature:**  $32^{\circ}\text{F}$  to  $100^{\circ}\text{F}$  ( $0^{\circ}\text{C}$  to  $38^{\circ}\text{C}$ )  
**Storage Temperature:**  $14^{\circ}\text{F}$  to  $158^{\circ}\text{F}$  ( $-10^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ )  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 5.3 in x 1.7 in (134.6 mm x 43.2 mm)  
**Approval Listings:** FCC/IC, ETL Listed to UL 2075 (US version); cETLus Listed to UL 2075, CAN/CSA 6.19 (Canada version)  
**Other Standards:** RoHS  
**One-Go-All-Go:** Yes



### Smoke/Heat Detector

#### PROSIXSMOKEV

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Audible Signal:** 85 dBA  
**Heat Detection:**  $\geq 135^{\circ}\text{F}$  ( $57^{\circ}\text{C}$ )  
**Rate-of-Rise (RoR):**  $> 104^{\circ}\text{F}$  ( $40^{\circ}\text{C}$ ) @  $15^{\circ}\text{F}/\text{min}$  ( $8.33^{\circ}\text{C}/\text{min}$ )  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 2 (Panasonic CR123A)

**Operating Temperature:**  $40^{\circ}\text{F}$  to  $100^{\circ}\text{F}$  ( $4.4^{\circ}\text{C}$  to  $38^{\circ}\text{C}$ )  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 4.7 in x 2.3 in (119.4 mm x 58.4 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Certified to UL 268 and CAN/ULC S529  
**Other Standards:** RoHS, Prop 65 US, NFPA 72  
**One-Go-All-Go:** Yes



### Heat Detector

#### PROSIXHEATV

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Audible Signal:** 85 dBA  
**Heat Detection:**  $\geq 135^{\circ}\text{F}$  ( $57^{\circ}\text{C}$ )  
**Rate-of-Rise (RoR):**  $> 104^{\circ}\text{F}$  ( $40^{\circ}\text{C}$ ) @  $15^{\circ}\text{F}/\text{min}$  ( $8.33^{\circ}\text{C}/\text{min}$ )  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover  
**Power Requirements:** 3 V CR123A Lithium Battery, Qty 2 (Panasonic CR123A)

**Operating Temperature:**  $40^{\circ}\text{F}$  to  $100^{\circ}\text{F}$  ( $4.4^{\circ}\text{C}$  to  $38^{\circ}\text{C}$ )  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 4.7 in x 2.3 in (119.4 mm x 58.4 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Certified to UL 521 and CAN/ULC S530  
**Other Standards:** RoHS, Prop 65 US, NFPA 72  
**One-Go-All-Go:** Yes

# ProSeries Security and Life Safety Sensors Technical Specifications

## WEARABLES



### Two-Way Wireless Key Fob

#### PROSIXFOB

**Key Ring:** Included  
**LED Indicators:** Yes  
**Audio Sounder:** Yes  
**Transmission Range\*:** 200 ft (61 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** No  
**Power Requirements:** 3 V CR2032 Lithium Coin Cell Battery, Qty 1 (Duracell DL2032 or Maxell CR2032)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):** 0.4 in x 1.4 in x 2.2 in (10.2 mm x 35.6 mm x 55.9 mm)  
**Approval Listings:** FCC/IC, ETL Listed to UL 985, UL 1023 and UL 1635, cETL Listed to ULC/ORD-C1023 and ULC-S545  
**Other Standards:** RoHS, SIA CP-01, C-Tick



### Personal Medical Transmitter


#### PROSIXMED

**Wearable Mode:** Belt Clip, Lanyard, or Wristband (all included)  
**LED Indicators:** Yes  
**Transmission Range\*:** 200 ft (61 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** No  
**Power Requirements:** 3 V CR2450 Lithium Coin Cell Battery, Qty 1 (Duracell DL2450, Panasonic CR2450 or Energizer CR2450)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):** 0.6 in x 1.6 in x 1.8 in (15.2 mm x 40.6 mm x 45.7 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 985, UL 1023 and UL 1637, Certified to ULC ORD-C1023 and ULC-S545  
**Other Standards:** RoHS

#### IMPORTANT!

This wireless key is intended as a convenience to the user and should not be considered a life safety device.



### Personal Panic Transmitter

#### PROSIXPANIC

**Wearable Mode:** Belt Clip, Lanyard, or Wristband (all included)  
**LED Indicators:** Yes  
**Transmission Range\*:** 200 ft (61 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** No  
**Power Requirements:** 3 V CR2450 Lithium Coin Cell Battery, Qty 1 (Duracell DL2450, Panasonic CR2450 or Energizer CR2450)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (H x W x L):** 0.6 in x 1.6 in x 1.8 in (15.2 mm x 40.6 mm x 45.7 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 985, UL 1023 and UL 1637, Certified to ULC ORD-C1023 and ULC-S545  
**Other Standards:** RoHS

#### IMPORTANT!

This wireless key is intended as a convenience to the user and should not be considered a life safety device.

# ProSeries Security and Life Safety Sensors Technical Specifications

## SOUNDERS

---



### Indoor Siren

#### PROSIXSIREN

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Siren Output Level:** 85 dBA at 10 ft (3 m)  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 1.5 V AA Non-Rechargeable Lithium Battery, Qty 4 (Energizer)

**Operating Temperature:** 32 °F to 122 °F (0 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 5.5 in x 1.8 in (139.7 mm x 45.7 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 985 and UL 1023, Certified to ULC-S545 and ULC/ORD-C1023  
**Other Standards:** RoHS  
**One-Go-All-Go:** Yes



### Outdoor Siren

#### PROSIXSIRENO

**Mounting Hardware:** Included  
**LED Indicators:** Yes  
**Siren Output Level:** 85 dBA at 10 ft (3 m)  
**Transmission Range\*:** 300 ft (92 m)  
**RF Frequency:** 2.4 GHz  
**Encryption:** 128-bit AES  
**Tamper Protected:** Cover and Wall  
**Power Requirements:** 1.5 V AA Non-Rechargeable Lithium Battery, Qty 4 (Energizer)

**Operating Temperature:** -40 °F to 122 °F (-40 °C to 50 °C)  
**Relative Humidity:** 95 % max., non-condensing  
**Dimensions (Dia x D):** 6.0 in x 1.9 in (152.4 mm x 48.3 mm)  
**Approval Listings:** FCC/IC, cETLus Listed, Conforms to UL 985 and UL 1023, Certified to ULC-S545 and ULC/ORD-C1023  
**Other Standards:** RoHS  
**One-Go-All-Go:** Yes

# ProSeries Security and Life Safety Sensors Ordering

## ORDERING

<b>PROSIXCT</b>	Door/Window Sensor
<b>PROSIXMINI2</b>	Mini Door/Window Sensor
<b>MINIMAGWHT</b>	Spare Magnet for PROSIXMINI2, White, 10/pack
<b>MINIBRNP</b>	Brown Cover/Magnet Conversion Kit for PROSIXMINI2, 10/pack (plastic parts only)
<b>MINIMAGBRN</b>	Spare Magnet for PROSIXMINI2, Brown, 10/pack
<b>MINIBLKPK</b>	Black Cover/Magnet Conversion Kit for PROSIXMINI2, 10/pack (plastic parts only)
<b>MINIMAGBLK</b>	Spare Magnet for PROSIXMINI2, Black, 10/pack
<b>PROSIXMINI</b>	Mini Door/Window Sensor (Flat style)
<b>PROSIXPIR</b>	Motion Detector
<b>PROSIXSHOCK</b>	Shock Sensor
<b>PROSIXTEMP</b>	Temperature Sensor
<b>PROSIXGB</b>	Glassbreak Detector
<b>PROSIXFLOOD</b>	Flood Detector
<b>PROSIXCOMBO</b>	Combination Smoke/Carbon Monoxide (CO) Detector
<b>PROSIXCO</b>	Carbon Monoxide (CO) Detector
<b>PROSIXSMOKEV</b>	Smoke/Heat Detector
<b>PROSIXHEATV</b>	Heat Detector
<b>COVERPLATE</b>	Mounting Plate to Cover Holes (fits PROSIXSMOKEV and PROSIXHEATV only)
<b>PROSIXFOB</b>	Two-Way Wireless Key Fob
<b>PROSIXMED</b>	Personal Medical Transmitter
<b>PROSIXPANIC</b>	Personal Panic Transmitter
<b>PROSIXSIREN</b>	Indoor Siren
<b>PROSIXSIRENO</b>	Outdoor Siren

CANADA	
<b>PROSIXCOMBOC</b>	Combination Smoke/Carbon Monoxide (CO) Detector
<b>PROSIXCOCN</b>	Carbon Monoxide (CO) Detector

REPLACEMENT BATTERIES	
<b>466</b>	3 V CR123A Lithium Battery Requires 1: PROSIXCT, PROSIXPIR, PROSIXSHOCK, PROSIXGB, PROSIXTEMP, PROSIXFLOOD Requires 2: PROSIXCO, PROSIXCOCN, PROSIXSMOKEV, PROSIXHEATV Requires 4: PROSIXCOMBO, PROSIXCOMBOC
<b>469</b>	3 V CR2 Lithium Battery Requires 1: PROSIXMINI2
<b>462</b>	1.5 V AA Non-Rechargeable Lithium Battery Requires 4: PROSIXSIREN, PROSIXSIRENO
<b>CR2032</b>	3 V CR2032 Lithium Coin Cell Battery Requires 1: PROSIXFOB
<b>CR2450</b>	3 V CR2450 Lithium Coin Cell Battery Requires 1: PROSIXMINI, PROSIXPANIC, PROSIXMED



MINIBRNP



MINIBLKPK



COVERPLATE shown with PROSIXSMOKEV

### For more information

[www.resideo.com](http://www.resideo.com)



### Resideo Technologies, Inc.

2 Corporate Center Drive, Suite 100

P.O. Box 9040

Melville, NY 11747

1-800-645-7492

[resideo.com](http://resideo.com)

L/PSR62WWSD/D | 05/21

© 2021 Resideo Technologies, Inc.

All rights reserved. This product

is manufactured by Resideo

Technologies, Inc. and its affiliates.