

SNAP FIT & EAR CLAMPS



Ezyklik®-P Low Profile Plastic Hose Clamp

Manufactured by HCL in the UK, the Ezyklik®-P (Plastic) hose clip is specifically designed for hose clamping applications where space is restricted. The unique design of the patent pending Ezyklik®-P ensures strong, fast and reliable clamping with a low profile design and fully corrosion resistant materials. Temperature range: Nylon 6.6 -40°C to 170°C, PP -40°C to 90°C.

Applications

- Automotive
- Hydro Massage
- Irrigation
- Pharmaceutical
- Vending
- White Goods
- General Industry


Materials – see section 7.2

Standard

- Heat/UV Stabilised ROHS compliant Nylon 6.6.

On Request

- Polypropylene
- Glass-filled Nylon 6.6.
- Available in different colours

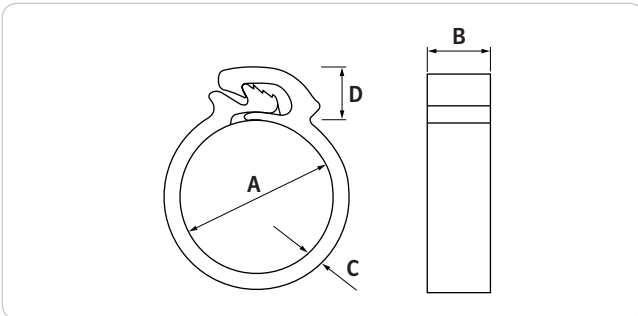

Installation Tools



MT-EZP-LVT-01



PT-EZY-C

Other Ezyklik®-P tools also available.

HCL Part No	Closed Diameter (A) mm	Band Width (B) mm	Band Thickness (C) mm	Head Height (D) mm	Box Quantity
EZY-P-8.5	8.5	8.0	1.7	5.3	2000
EZY-P-8.7	8.7				
EZY-P-8.9	8.9				
EZY-P-9.2	9.2				
EZY-P-9.5	9.5				
EZY-P-10.0	10.0				
EZY-P-11.4	11.4				
EZY-P-12.0	12.0				
EZY-P-12.5	12.5				
EZY-P-12.7	12.7				
EZY-P-13.2	13.2				
EZY-P-13.7	13.7				
EZY-P-14.5	14.5				
EZY-P-14.6	14.6				
EZY-P-15.0	15.0				
EZY-P-15.7	15.7				
EZY-P-15.9	15.9				
EZY-P-16.5	16.5				
EZY-P-16.8	16.8				
EZY-P-17.1	17.1				
EZY-P-17.5	17.5				
EZY-P-17.6	17.6				
EZY-P-18.0	18.0				
EZY-P-18.5	18.5				
EZY-P-19.1	19.1				
EZY-P-19.6	19.6				
EZY-P-20.1	20.1				
EZY-P-20.8	20.8				
EZY-P-21.1	21.1				
EZY-P-22.0	22.0				
EZY-P-22.1	22.1				
EZY-P-22.6	22.6				
EZY-P-23.1	23.1				
EZY-P-23.6	23.6				
EZY-P-24.7	24.7				
EZY-P-25.8	25.8				
EZY-P-26.8	26.8				
EZY-P-28.0	28.0				
EZY-P-30.6	30.6				
EZY-P-31.4	31.4				
EZY-P-32.5	32.5				
EZY-P-36.5	36.5				
EZY-P-42.4	42.4				
EZY-P-43.3	43.3				
EZY-P-45.5	45.5				
		8.0	2.0	6.8	1500
		9.0	2.5	7.3	400

All weights, dimensions & quantities are subject to a 2.5% tolerance.
To add material selection to the HCL Part No: for Nylon 6.6. Black, add "PA66-BK". Other colours available on request.