

## BATTERY GPRS SEPARATOR ALARM

Ideal for new build sites or for retro-fitting to existing separators where mains supply is not readily or easily available. As no external power source is required, installation is efficient and cost effective. The unit is designed to monitor up to two oil/water separator tanks for the build-up of oil, silt or excessive liquid.

The GPRS alert system of this unit will issue an email upon alarm, or can be used in conjunction with our central monitoring system. As well as this the unit has a flashing beacon alarm and a liquid crystal display.

The unit automatically checks the condition of the probes and batteries every 15 minutes. Any probe condition changes or a low battery condition are notified via email. A manual probe status check can also be initiated at any time by pressing the button on the front of the unit.

Alarm warnings allow you time to take corrective action ensuring the safe and economic operation of separators preventing oil passing through the separator and polluting watercourses which may result in expensive fines and clean up costs.

Darcy can tailor your Separator Alarm to your requirements by displaying your name and contact details on the liquid crystal display and fitting your custom label (please ask for details).

### Benefits

The alarm system and sensors guarantee an increased level of safety and requires simple installation for bespoke monitoring of oil and petrol separators.


- Warn of excessive levels of oil, liquid and silt
- Tells you when separator needs emptying
- Reduces waste management costs
- Designed to comply with EN858-1 and 2
- Can be fitted to interceptors from all manufacturers
- Reduces interceptor servicing costs
- Ensures safe and economic operation of interceptors

### Specifications

- Power: 4x 1.5v alkaline 'D' cell batteries
- IP65 ABS Enclosure
- Display: Liquid Crystal
- Alarm: Beacon and email
- Probe Range: 200 metres max. (Dependent on cable style)
- Atex approved: Ex II (1)G [Ex ia Ga] IIC (-20°C ≤ Ta ≤ +50°C)

Compatible probe types:

- High Oil: conductivity or specific gravity
- High Liquid: float switch
- Silt: optical

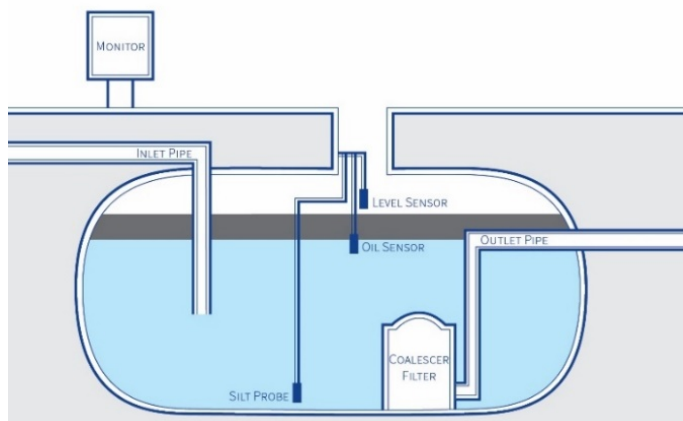

Revision Date: 04/03/2019