
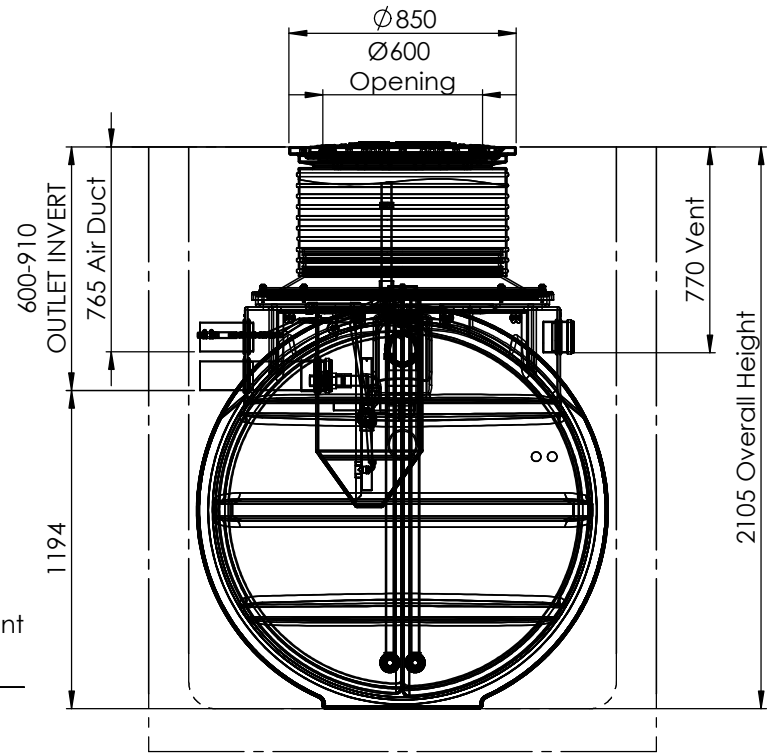


Notes :

1. INLET/OUTLET are Ø110 mm. Suitable reducers should be used to step down from bigger pipework. Supplied by others.
2. Units invert is adjustable by trimming external riser to required height. Selection of correct invert is key and must be suitable for drainage and ground levels on site. Ext neck kit available for deeper inverts up to a maximum invert of 1500 mm.
3. It is important to read and understand installation operation and maintenance guidelines before attempting to install this unit.
4. Vent pipe connections are supplied but vent runs and stacks are supplied by others.
5. Ø110mm Rodding point connection provided - to be extended to ground level by others and capped.
6. The unit will normally need de sludged annually. However this is dependant on use.
7. Tank Weight (Empty) - 285 Kgs

Rodding Point
See Notes

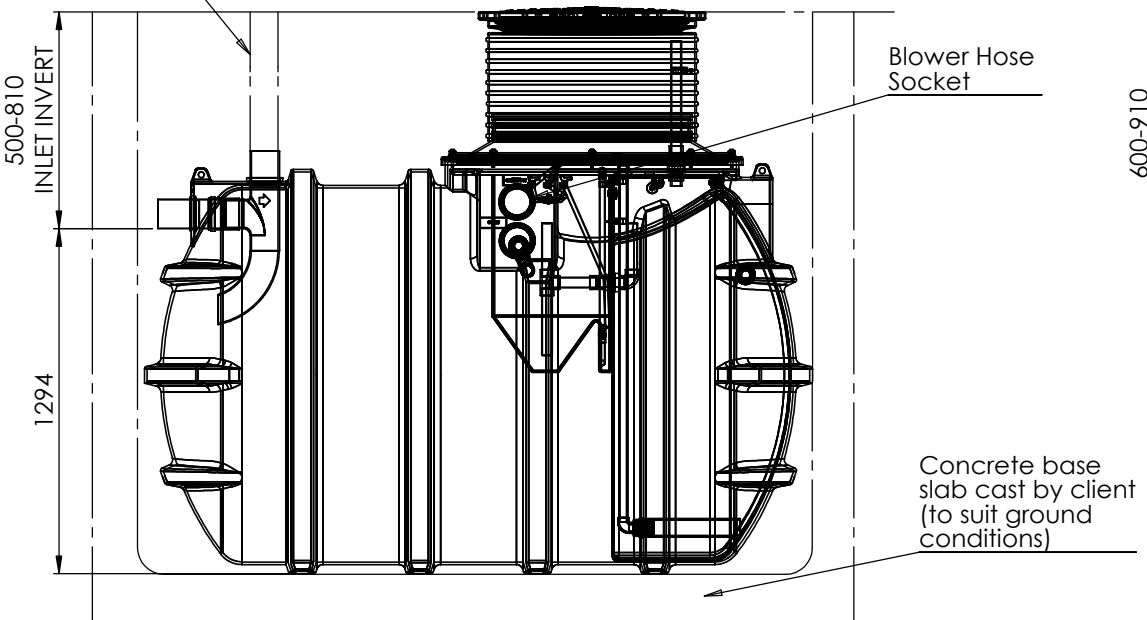

Please check with Kingspan Environmental that this drawing is the latest issue			
Issue	Date	Drawn by	Approved by
03	06/05/16	JMcM	
02	02/08/14	JMcM	
		Description	
		CC1312	
		CC1197	

Material :	Tolerance :
Finish :	Thickness :
Weight : Kgs	Surface Area :

Drawing : DS1255P	Page 1 of 1
BioFicient 1 Treatment Plant Sales Drawing	

All dimensions in mm

Scale: Not to scale

Kingspan Environmental reserve the right to alter the details of this drawing without prior notice. This drawing is copyright and may not be reproduced or used without the written permission of Kingspan Environmental.

