


Above ground 1.5kw 415v blower unit
or 2 x 240v if 415v unavailable
in housing with failure alarm

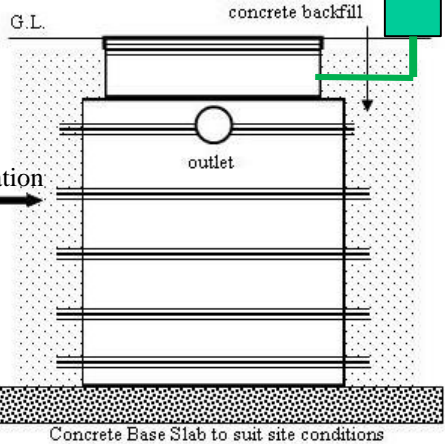

OPTIONAL
Integral Duty/Standby
Discharge Pumps
With 63mm MDPE
Termination
and failure alarm.
(No gravity outlet)

** Access cover options are available for installation
in vehicular / trafficked areas but CLENVIRO **MUST**
be consulted at quotation stage as an alternative
manufacturing structural design is required.

*** Alternative inlet inverts can be accommodated at time of
order/manufacture. Retro-fit (after delivery of the tank)
access extensions in excess of 500mm height
will invalidate any structural warranty.



TITLE : CLF16 (250pe) – Standard Inlet Invert
GRAVITY or TWIN PUMP DISCHARGE
GENERAL ARRANGEMENT DRAWING

DRG. No..7 -2018-250-SGP

NOT TO SCALE

THIS DRAWING IS PROTECTED BY COPYRIGHT AND MUST NOT BE ALTERED OR REPRODUCED WITHOUT
WRITTEN PERMISSION OF CLENVIRO LIMITED