


SPECIFICATIONS


Model number		HP-20	HP-30	HP-40	HP-60	HP-80	HP-100	HP-120	HP-150	HP-200
Rated supply	V	AC220-240V								
Power frequency	Hz	50Hz								
Normal discharging pressure	kPa	9.8kPa	12.8kPa		14.7kPa		17.7kPa		20.0kPa	
Discharging airflow	ℓ/min	18ℓ/min	30ℓ/min	40ℓ/min	60ℓ/min	80ℓ/min	100ℓ/min	120ℓ/min	150ℓ/min	200ℓ/min
Power-consumption	W	17W	22W	38W	51W	71W	95W	115W	125W	210W
Noise numeric number	dB A	31dB A	31dB A	32dB A	35dB A	36dB A	38dB A	40dB A	45dB A	46dB A
Mass	kg	3.2kg	5.7kg		7.0kg		8.5kg		9.0kg	

DIMENSIONAL DRAWING

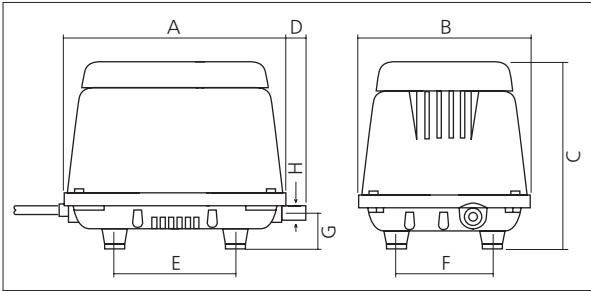

Model number	A	B	C	D	E	F	G	H
HP-20	182	138	170	21	92	78	37	φ18
HP-30/HP-40	208	171	190	20	120	90	37	φ18
HP-60/HP-80	235	180	196	21	130	100	37	φ18
HP-100/HP-120	256	200	222	20	140	110	37	φ18
HP-150/HP-200	256	200	222	20	140	110	37	φ18

PERFORMANCE CURVE

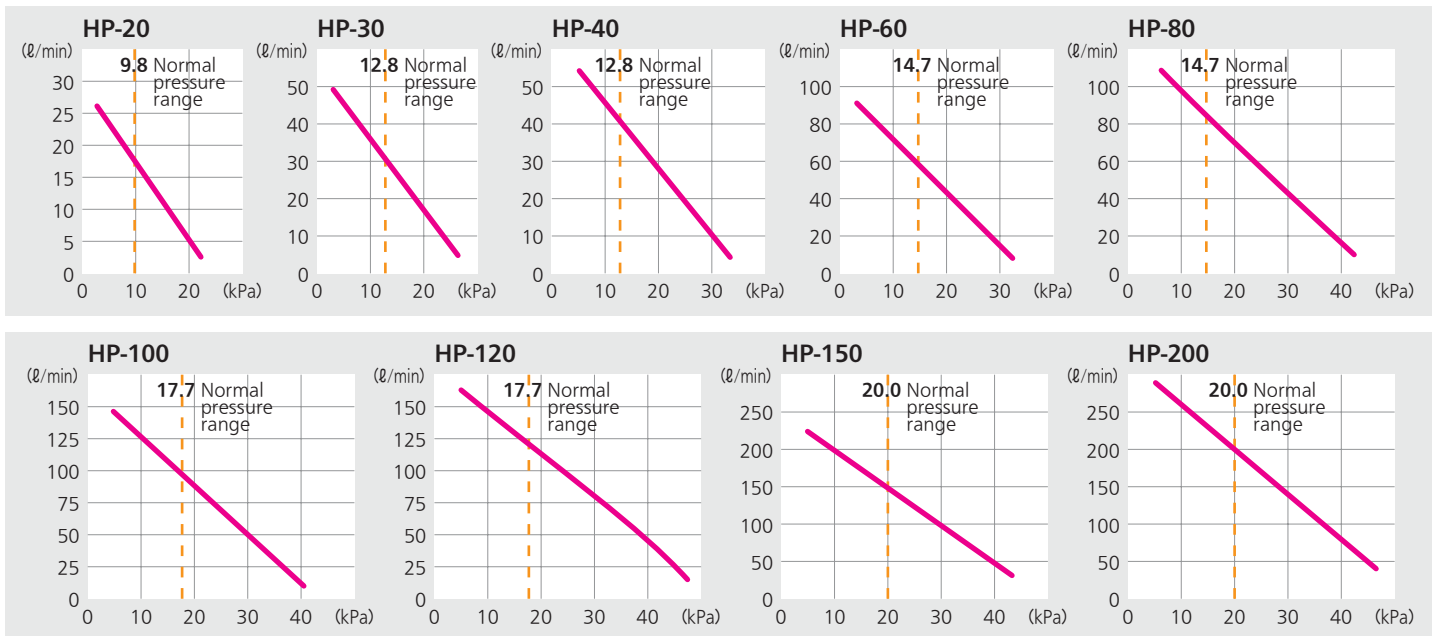

TECHNO TAKATSUKI CO.,LTD.

Head Office, International Marketing Department
8-16, Haccho-Nishimachi, Takatsuki, Osaka 569-0095
TEL +81.72.684.0805 FAX +81.72.684.0807

HIBLOW FRANCE SAS
13 Rue des Saules 78960 Voisins Le Bretonneux France
TEL +33-6-75-83-25-06 FAX +33-1-61-37-09-15

HIBLOW SPAIN SL
Apartado de Correos No 118 28830
San Fernando de Henares, Madrid, Spain
TEL +34-61-647-9716 FAX +34-91-669-3953

Distributor, Agency

※ Materials may be modified without notice.

※ "HIBLOW" is a registered mark of TECHNO TAKATSUKI CO., LTD.



In consideration of the environment, this flyer is printed in soybean oil.



We take into consideration those who have vision problems such as amblyopia, presbyopia and others adopting the Universal Design font.