

Installation/Maintenance instruction Spark Arrestor



Step 1

Unpack the box, it will include 6x set screws (3 spare), 1x Loctite, 1x Allen key and 1x Fisch Moto spark arrestor.




Step 2

Apply Loctite to 3 set screws and thread them into the holes. Make sure they are not protruding past the outer diameter of the Fisch Moto spark arrestor.



Step 3

Slide the Fisch Moto spark arrestor in the tail pipe of the exhaust.

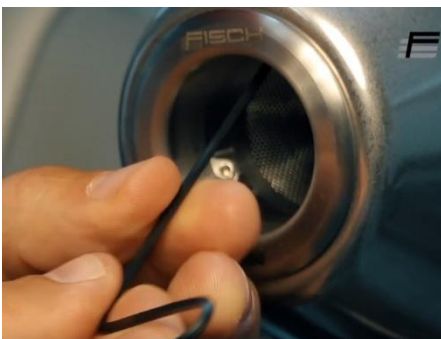

Step 4

Tighten all set screws with the Allen key until the screws are firmly against the inside of the exhaust opening wall. You should not be able to remove the insert by hand.

Maintenance every 6 months or after 100hrs

For maintenance, loosen the set screws with the Allen key and remove the Fisch Moto spark arrestor. Inspect the spark arrestor screen for any dirt stuck to it or holes in the screen. Clean the screen if necessary, using a wire brush or blow through it with compressed air. If there are holes in the screen replace the spark arrestor. After maintenance start with step 2 for installation.