

ETZST-62, ETZST-62/R35

SPECIFICATION

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- PRESSURE BALANCED VALVE
- 2 FUNCTIONS DIVERTER VALVE WITH HALF ZONES
- ASSEMBLED WITH PVC HOSES
- SUPPLIED WITH 1/2" HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- Pressure: Minimum 25 psi, maximum 80 psi
- ½" CONNECTION

AVAILABLE OPTION

ADDITION OF A DIVERTER SPOUT (REF. MODEL ETZG-62/R35)

AVAILABLE FINISH

BRUSHED STAINLESS STEEL: ETZST-62

ACCESSORIES

Accessories	ETZST-62	ETZST-62/R35
SHOWER HEAD	BJ-112-BC	BJ-112-BC
HAND SHOWER	HS-210	HS-210
SUPPORT	HSH-103	HSH-103
Hose	SSH-150	SSH-150
DIVERTER SPOUT	HC-105	R-35


FLOW RATE

PRESSURE BALANCED VALVE	24 L/MIN [6.3 GPM] @ 60 PSI
Shower head	9.5 L/мін [2.5 gpм] @ 60 psi
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

WARRANTY

PRODUCTS COVERED BY A 5-YEAR WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

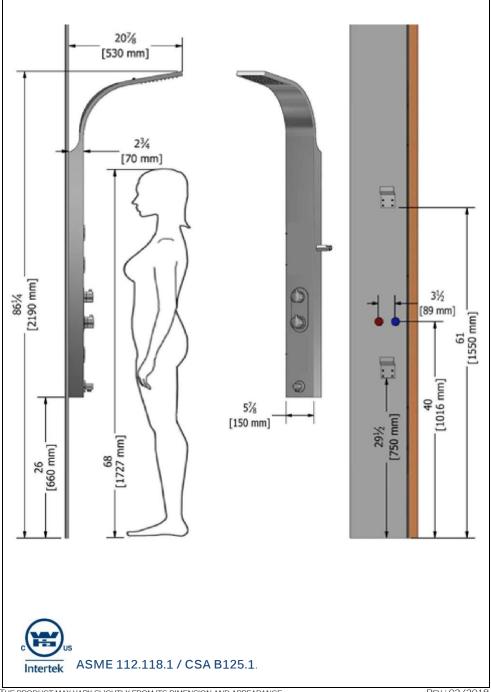

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

Rev.: 02/2018