

**SPECIFICATION**

- STAINLESS STEEL SHOWER COLUMN, GRADE #304
- ½" THERMOSTATIC VALVE
- 3 SHUT-OFF VALVES WITH VOLUME CONTROL
- ASSEMBLED WITH STAINLESS STEEL BRAIDED HOSES
- SUPPLIED WITH ½" HI-FLOW HOSES
- ANTI-LIMESCALE SILICONE NOZZLES
- PRESSURE : MINIMUM 35 PSI, MAXIMUM 80 PSI
- ½" CONNECTION

**AVAILABLE OPTION**

- CHOICE OF 3 SIZES OF SHOWER HEADS (8",10",12")
- HAND SHOWER HOLDER SUPPORT REPLACED BY A SLIDING BAR

**AVAILABLE FINISH**

- BRUSHED STAINLESS STEEL : TZST-12

**ACCESSORIES**

ACCESSORIES	TZST-12-S8	TZST-12-S10	TZST-12-S12
SHOWER HEAD	SSTS-08-S	SSTS-10-S	SSTS-12-S
HAND SHOWER	HS-203	HS-203	HS-203
SUPPORT	HSH-302	HSH-302	HSH-302
HOSE	SSHE-175	SSHE-175	SSHE-175
DIVERTER SPOUT	R-36	R-36	R-36


**FLOW RATE**

THERMOSTATIC VALVE	30 L/MIN [7.9 GPM] @ 60 PSI
SHOWER HEAD	9.5 L/MIN [2.5 GPM] @ 60 PSI
HAND SHOWER	9.5 L/MIN [2.5 GPM] @ 60 PSI
JETS (6)	14.5 L/MIN [3.8 GPM] @ 60 PSI
DIVERTER SPOUT	17 L/MIN [4.5 GPM] @ 60 PSI
SPOUT	19.7 L/MIN [5.2 GPM] @ 60 PSI

**WARRANTY**

PRODUCTS COVERED BY A FULL LIMITED LIFETIME WARRANTY AGAINST ALL MANUFACTURING DEFECTS.

FOR MORE INFORMATION ABOUT THE PRODUCT, OR BEFORE PROCEEDING TO ANY INSTALLATION PLEASE CONSULT THE INSTALLATION MANUAL.

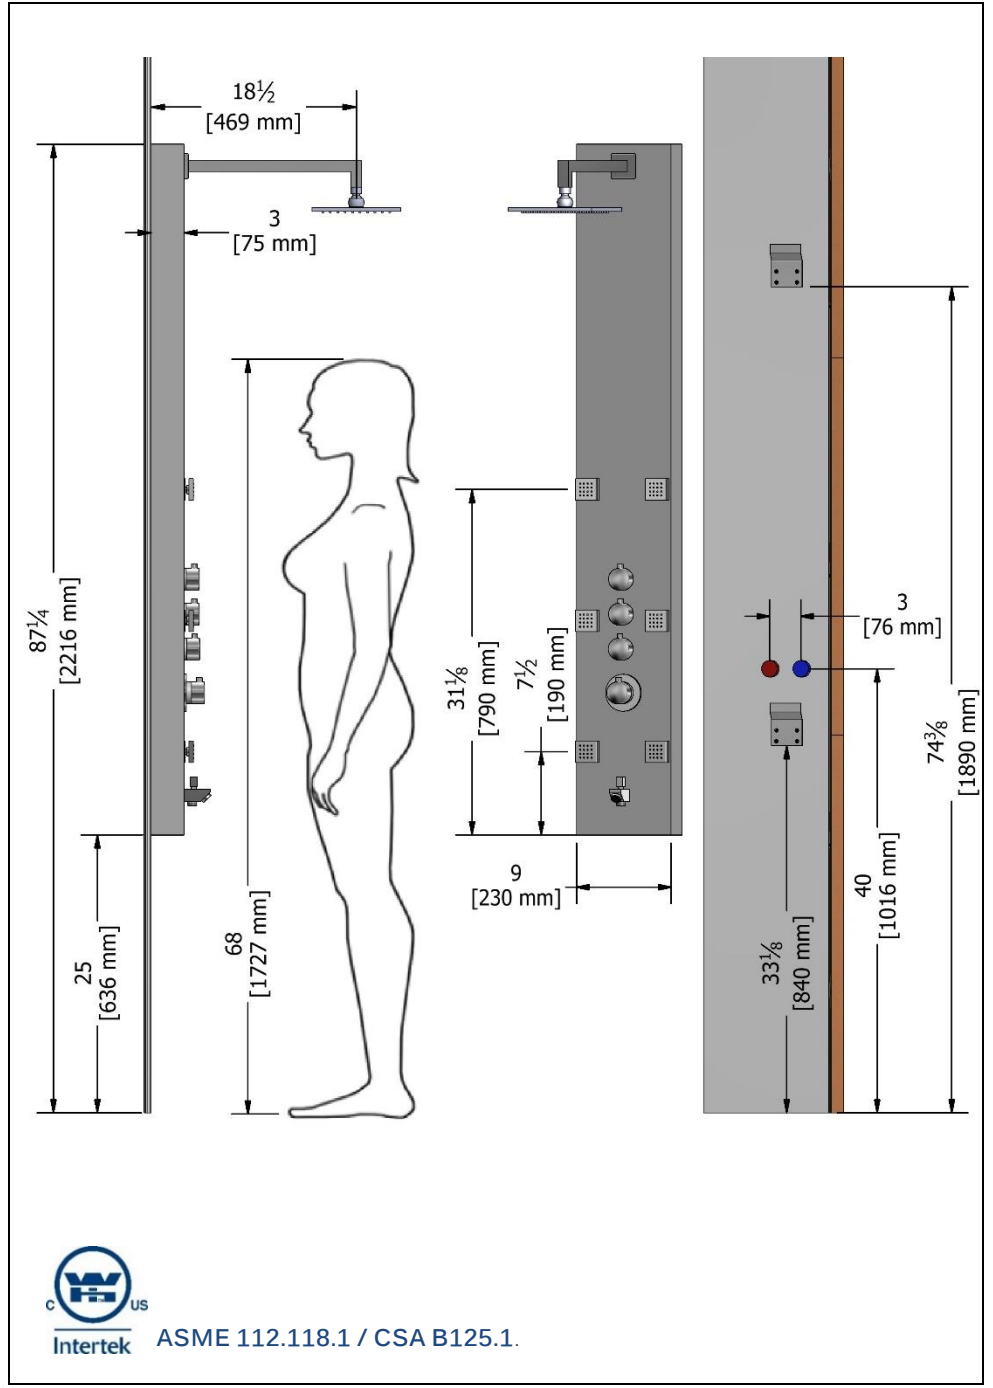

THE PRODUCT MAY VARY SLIGHTLY FROM ITS DIMENSION AND APPEARANCE.

REV.: 02/2018