

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING

LD12W -RD Series

12W

Model: LD12W Series

- Drive Mode: Constant Current with Dimming
- Technology: PFC Off-Line Switch Mode
- Output Power: 12W
- Input Voltage: 120 to 277VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 4VDC - 48VDC
- Output Currents: 250mA - 1000mA
- Dimming: 0-10V or Optional PWM Dimming, 10% ~ 100%

Environmental


1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 40°C: 550,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2, safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B & EN55015 compliant
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry, Damp, Wet Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, Short term (60 Second) output short circuit, auto-recovery
8. EN61000-4-5: 2kV L-N, 8/20 µsec surge protection.

Electrical Specifications at 25°C

- Input voltage range: 120 - 277Vac (Full Range 100 to 305VAC)
- Frequency: 47- 63HZ
- Power Factor: ≥ 0.90 at $\geq 60\%$ Load 120Vac/230Vac, $\geq 90\%$ Load 277Vac
- THD%: $\leq 20\%$ at $\geq 50\%$ Load, 120Vac/230Vac, $\geq 60\%$ Load 277Vac
- Inrush current: $<10A$ at 25C, 230V, cold start, Max. Load
- Input current: 0.13A at 120Vac, 60Hz, Maximum Load
- Efficiency: 77% typical at 230Vac 50Hz
- Maximum output power: Per table below
- Line regulation accuracy: $\pm 3\%$
- Load regulation accuracy: $\pm 4\%$



IP66



Constant Current Versions with 0-10V Dimming

Part Number ⁽²⁾	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD12W-48-C0250-RD	YES	YES	16 - 48 VDC	250 mA	$\pm 4\%$	12W	80%
LD12W-48-C0220-RD	YES	YES	16 - 48 VDC	220 mA	$\pm 4\%$	10.6W	77%
LD12W-48-C0125-RD	YES	YES	16 - 48 VDC	125 mA	$\pm 4\%$	6W	75%
LD12W-36-C0350-RD	YES	YES	12 - 36 VDC	350 mA	$\pm 4\%$	12.6W	80%
LD12W-36-C0250-RD	YES	YES	12 - 36 VDC	250 mA	$\pm 4\%$	9W	77%
LD12W-24-C0500-RD	YES	YES	8 - 24 VDC	500 mA	$\pm 4\%$	12W	78%
LD12W-16-C0800-RD	YES	YES	6 - 16 VDC	800 mA	$\pm 4\%$	12.8W	78%
LD12W-16-C0700-RD	YES	YES	6 - 16 VDC	700 mA	$\pm 4\%$	11.2W	78%
LD12W-12-C1000-RD	YES	YES	4 - 12 VDC	1000 mA	$\pm 4\%$	12W	77%

Notes

1. Typical efficiency measured at 230VAC input, full load
2. For PWM dimmable version replace -RD with -PD: For Example: LD20W-18-C1400-PD is PWM dimmable version.
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Gray on the output side.
-PD PWM Dimmable version comes with an extra two wires +Purple/-Gray on the output side.
3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for details.
4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5KHz, 0-10V Pulse. See page 4 for details.

12W

LD12W -RD Series

DIMMING



LED Optimized Drivers



12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 165 grams (5.8 oz) Typical

Labeling Example

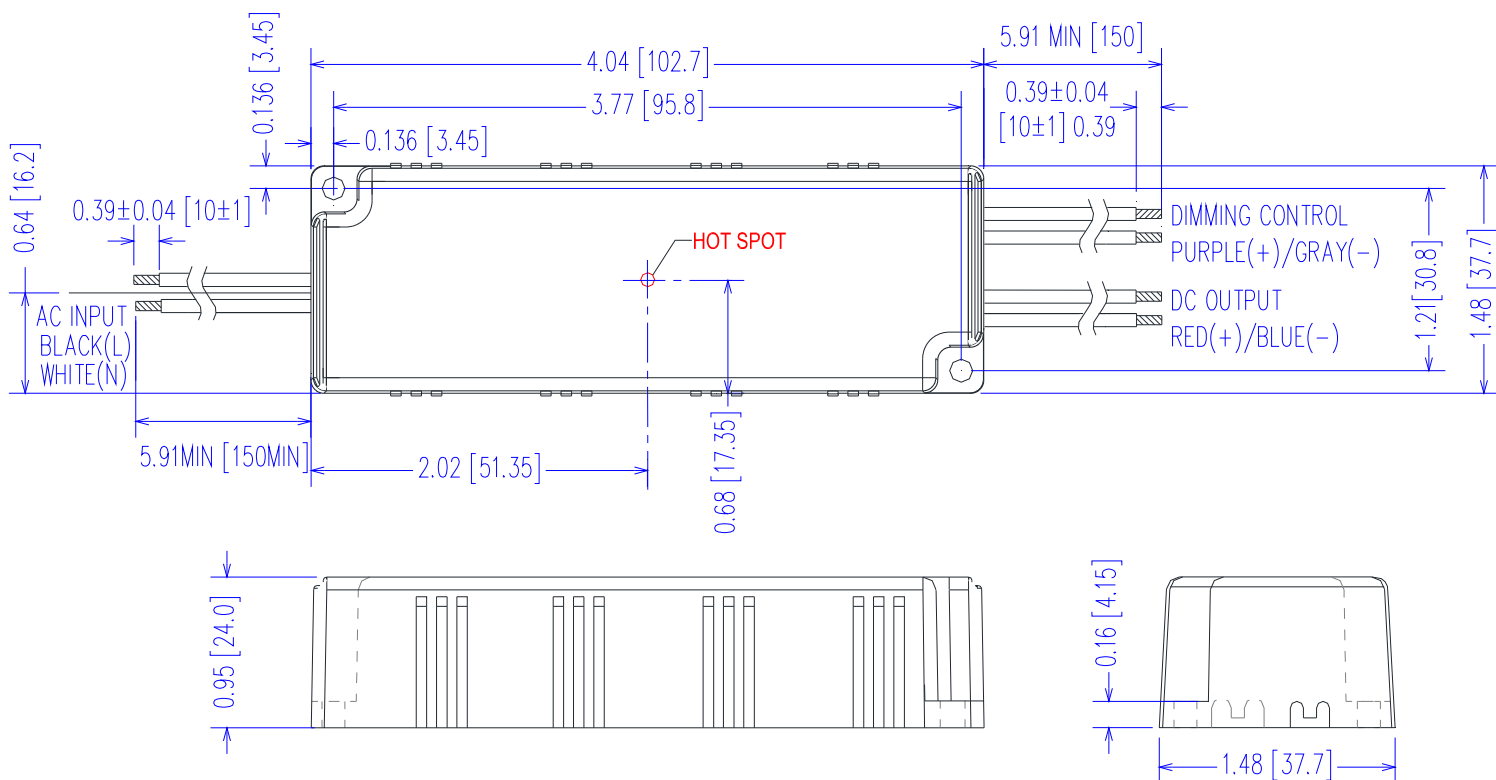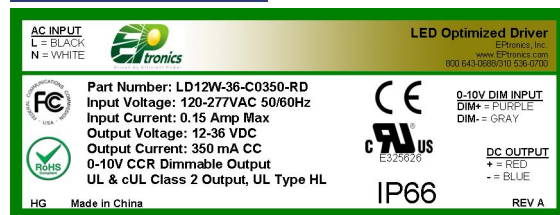

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING

12W

LD12W -RD Series


-RD 0-10V Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

- RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
- RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal. Recommended dimmer is Leviton IP710 or equivalent
- RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

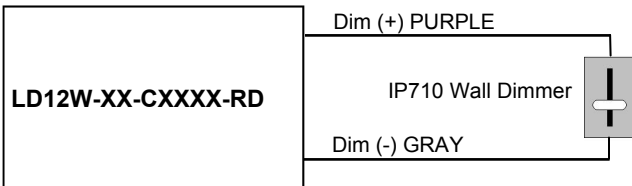

-RD 2-Wire 0-10V Analog Dimming Scheme

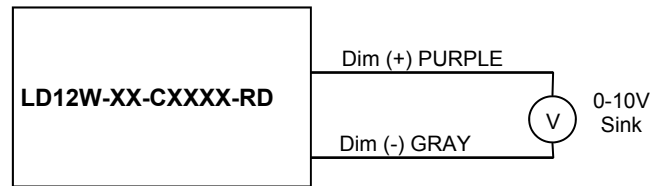

% Output Current vs. 0-10VDC Dimming Input

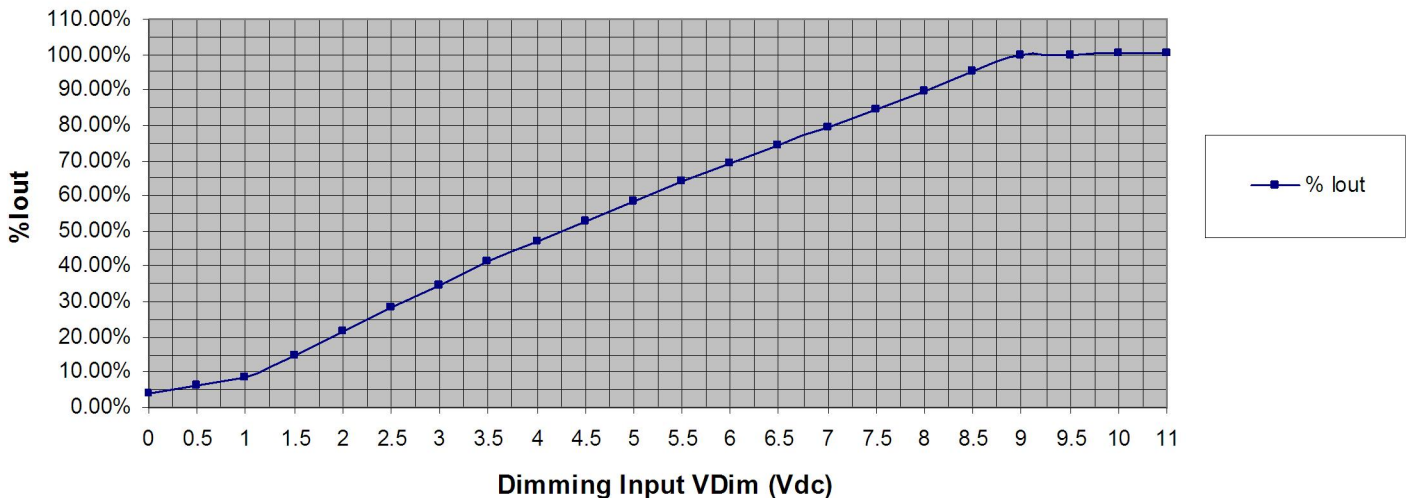

12W

LD12W -RD Series

DIMMING

**LED Optimized Drivers**

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING


-PD PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

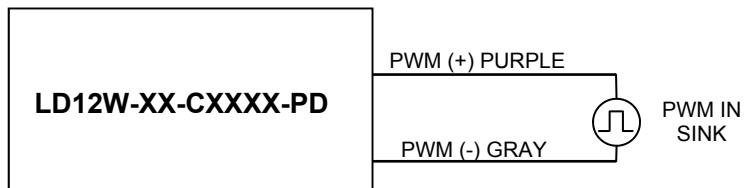

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

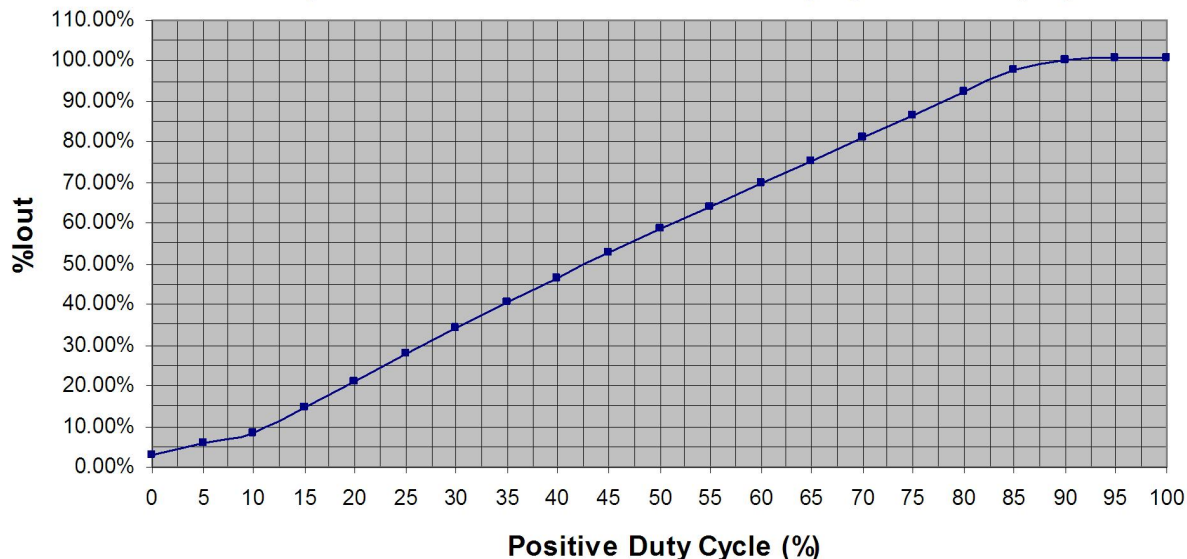

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LD12W -RD Series
12W

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	100 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.13A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.07A	Measured at 230Vac/50Hz Input, Output Full load.
	—	—	0.06A	Measured at 277Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	—	10A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% Ipeak duration ~750 µsec (1/2*I _p ² *t)
Inrush Current (I ² t)	—	—	0.04 A ² s	
Leakage Current	—	0.36mA	0.50mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	0.61mA	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	THD%: ≤ 20% at ≥ 50% Load, 120Vac/230Vac, ≥ 60% Load 277Vac
Power Factor (PF)	0.90	—	—	PF: ≥ 0.90 at ≥ 60% Load 120Vac/230Vac, ≥ 90% Load 277Vac

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-4%	Per Table	+4%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (Vpk-pk)	—	—	20% Vo	20 MHz BW, Full load output in parallel with 0.1 µF ceramic & 10 µF Electrolytic.
Ripple (Ipk-pk)	—	—	50% Io	20 MHz BW, Full load output in parallel with 0.1 µF ceramic & 10 µF Electrolytic. 120 Hz component
Start-up Time	—	700 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (Tc)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (Ta)	-30 °C	—	+60 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	482,000 Hours	—	—	MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% Vo	No Damage, Auto recovery after fault is removed.

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING


Safety Compliance

Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 M Ω , 500VDC @ 25 °C, 70 % RH
Dimming Circuit	Dim+ Purple/Dim- Grey are considered part of the secondary circuit.

EMC Compliance


Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, $\geq 80\%$ Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

Power Factor Curves (Typical)

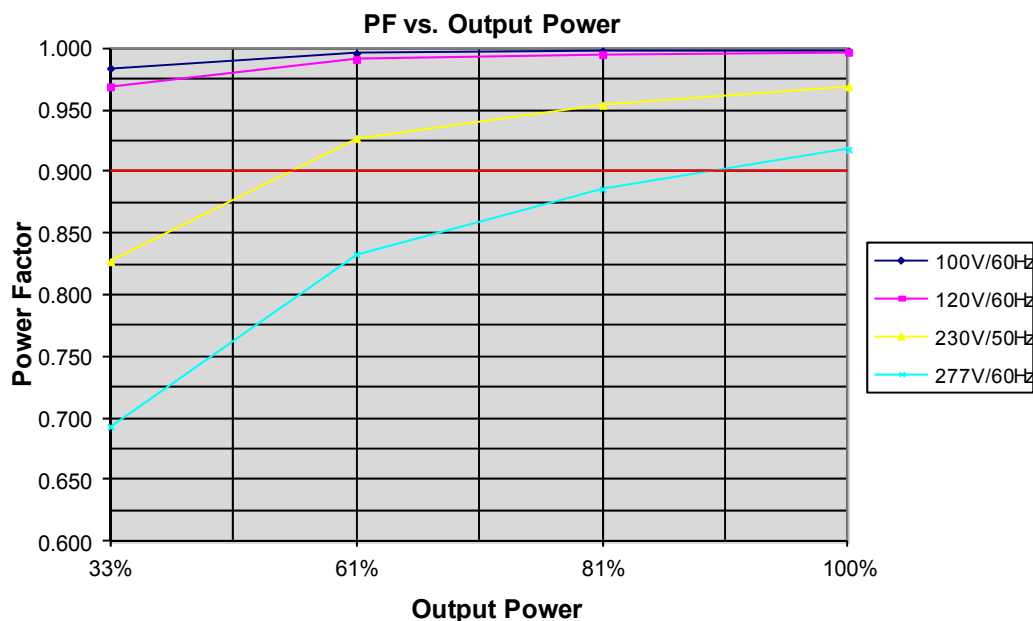


THD Curves (Typical)

THD vs. Output Power

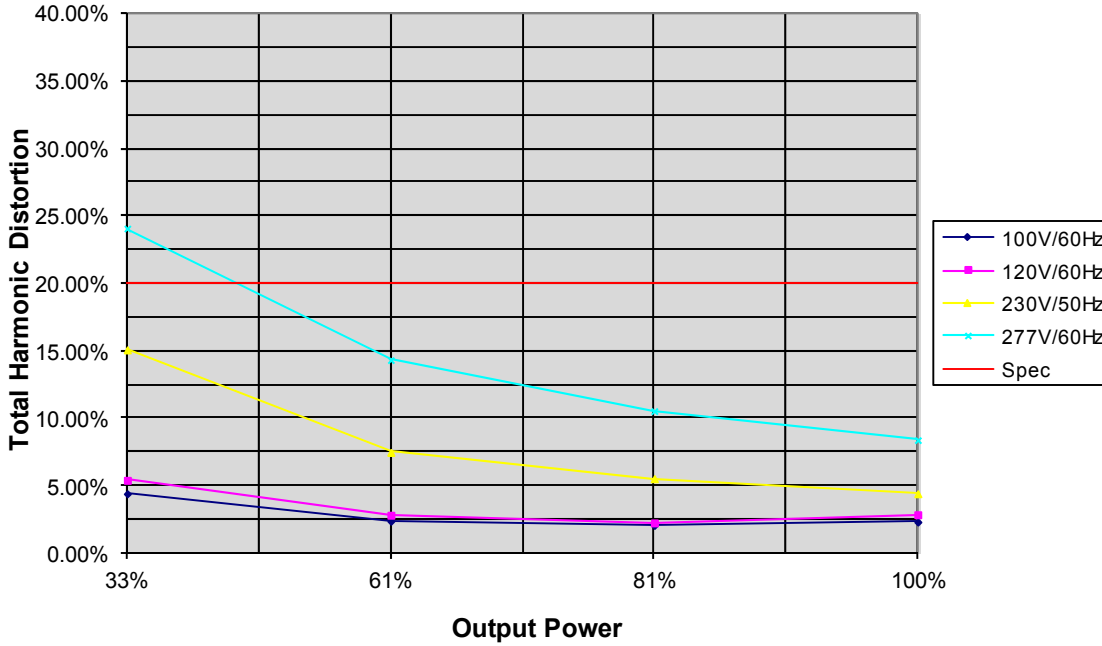

Efficiency Curve (Typical)

Efficiency vs. Output Power

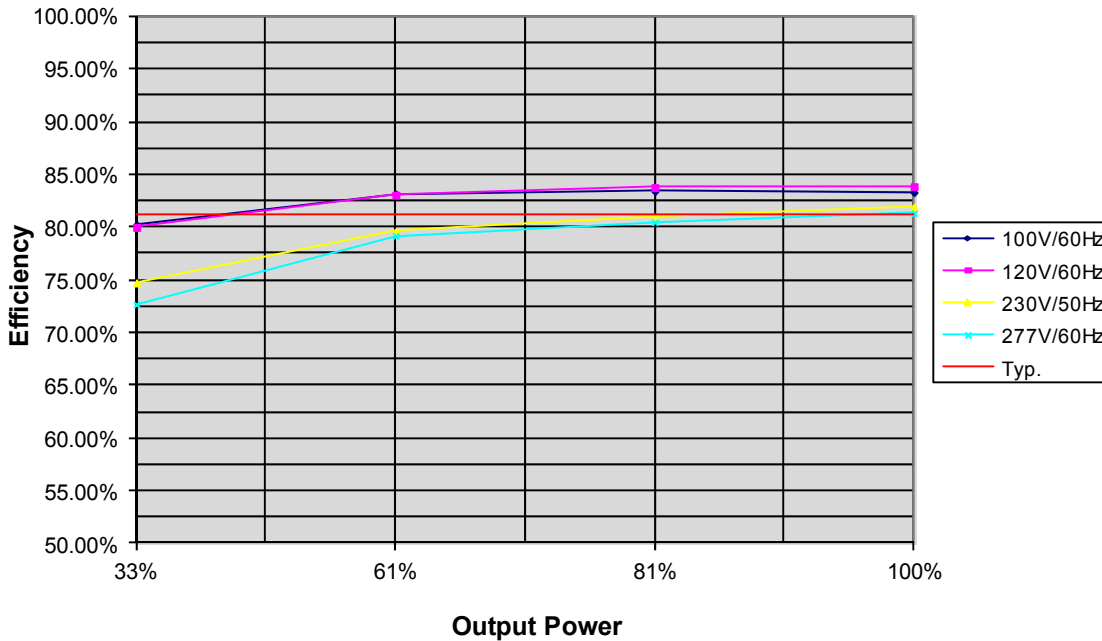

12W

LD12W -RD Series

DIMMING




LED Optimized Drivers

12 Watt LD12W -RD Series

CONSTANT CURRENT LED DRIVER WITH DIMMING

Life vs. Ambient Temperature

LD12W -RD Estimated Life Full Load @ 120Vac

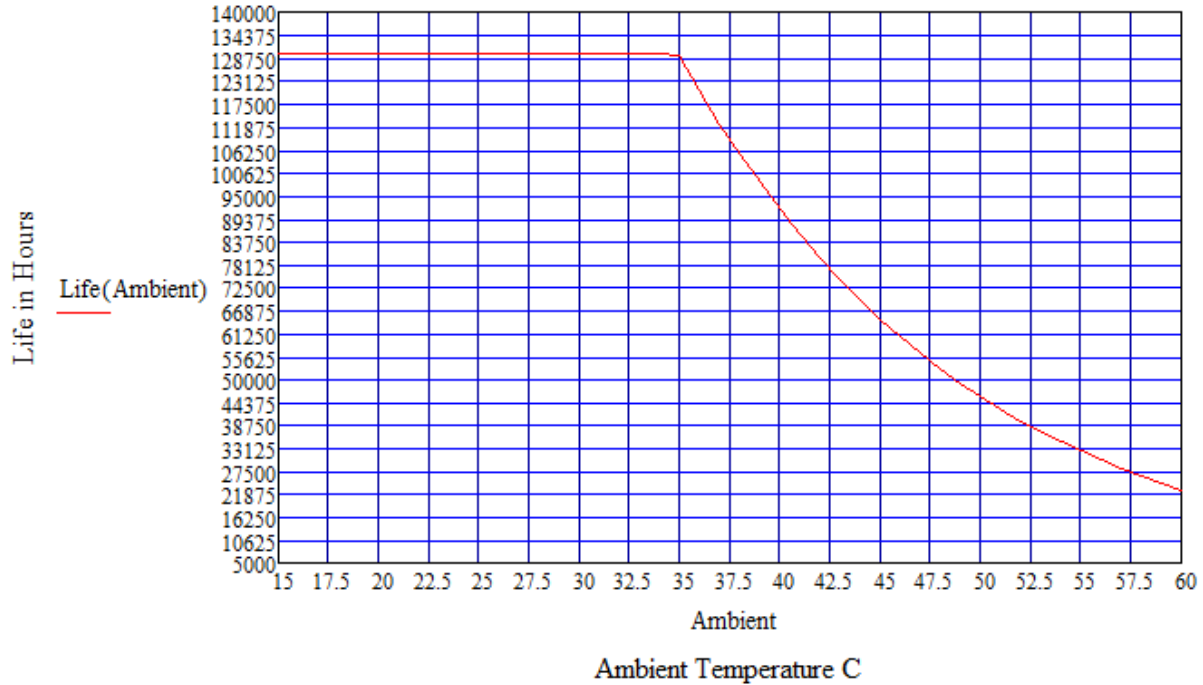

Life vs. Case (Tc) Temperature

LD12W -RD Estimated Life Full Load @ 120Vac

