

40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING



DIMMING
LD40W Series
40W

Model: LD40W Series

- Drive Mode: Constant Current or Constant Voltage
- Technology: PFC Off-Line Switch Mode
- Output Power: 40W Max.
- Input Voltage: 90 to 305VAC, 47- 63Hz
- Number of Outputs: One
- Output Voltages: 3VDC - 130VDC
- Output Currents: 300mA - 4450mA
- Optional 0-10V or PWM Positive Dimming 10% - 100%

Environmental

1. Operating temperature: Tc 90C Maximum. Reference -30 to +60°C ambient
2. Storage temperature range: -40 to +85°C
3. Humidity (non-condensing): 5% - 95%RH
4. Cooling: Convection
5. Vibration Frequency: 5-55Hz/2g, 30 minutes
6. Impact resistance: 1g/s
7. MTBF@ 25°C: 482,000 hours @ Full Load per MIL-217F Notice 2.

Safety and Compliance

1. UL8750, EN61347, CSA 22.2 safety recognized, UL Type HL
2. FCC, 47CFR Part 15 Class B & EN55015 compliant.
3. Water resistant and Dust Proof Design: IP66, NEMA4, for Dry & Damp Locations.
4. Compact, Lightweight Design.
5. Safety Isolation between Primary and Secondary
6. Meets EN61000-3-2 & EN61000-3-3 Class C
7. Protection: output over-voltage, output over-current, output short circuit, auto-recovery.
8. EN61000-4-5: 2kV L-N, 8/20 μsec surge protection.

Electrical Specifications at 25°C

- Input voltage range: 90 to 305VAC
- Frequency: 47- 63HZ
- Power Factor: ≥ 0.90 at ≥ 60% Load, 120Vac/230Vac, ≥ 85% Load 277Vac
- THD%: ≤ 20% at ≥ 60% Load, 120Vac/230Vac, ≥ 80% Load 277Vac
- Inrush current: <20A at 25C, 277Vac, cold start, Full Load
- Input current: 0.42A typical at 120Vac, 60Hz, Full Load
- Efficiency: 85% typical at 230Vac Full Load
- Line regulation accuracy: ± 3%
- Load regulation accuracy: ± 4%
- Leakage current: 400uA typical; Hold up time: half cycle



IP66



Constant Current Versions

Part Number ⁽²⁾	US Class 2	CN Class 2	Output Voltage Range	Output Constant Current	Current Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD40W-130-C0300	NO	NO	44 - 130 VDC	300 mA	+ 3%	40W	87%
LD40W-114-C0350	NO	NO	38 - 114 VDC	350 mA	+ 3%	40W	86%
LD40W-100-C0400	NO	NO	33 - 100 VDC	400 mA	+ 3%	40W	86%
LD40W-89-C0450	NO	NO	30 - 89 VDC	450 mA	+ 3%	40W	86%
LD40W-72-C0550	NO	NO	24 - 72 VDC	550 mA	+ 3%	40W	85%
LD40W-54-C0700	YES	YES	18 - 54 VDC	700 mA	+ 3%	40W	85%
LD40W-48-C0830	YES	YES	16 - 48 VDC	830 mA	+ 3%	40W	85%
LD40W-45-C0900	YES	YES	16 - 45 VDC	900 mA	+ 3%	40W	85%
LD40W-40-C1000	YES	YES	13 - 40 VDC	1000 mA	+ 3%	40W	85%
LD40W-36-C1100	YES	YES	12 - 36 VDC	1100 mA	+ 3%	40W	85%
LD40W-30-C1400	YES	YES	10 - 30 VDC	1400 mA	+ 3%	42W	85%
LD40W-24-C1670 ⁽⁵⁾	YES	YES	8 - 24 VDC	1670 mA	+ 3%	40W	85%
LD40W-22-C1820	YES	YES	7 - 22 VDC	1820 mA	+ 3%	40W	85%
LD40W-18-C2200	YES	YES	6 - 18 VDC	2200 mA	+ 3%	40W	84%
LD40W-15-C2680	YES	YES	5 - 15 VDC	2680 mA	+ 3%	40W	84%
LD40W-13-C3080	YES	YES	4 - 13 VDC	3080 mA	+ 3%	40W	84%
LD40W-12-C3330 ⁽⁵⁾	YES	YES	4 - 12 VDC	3330 mA	+ 3%	40W	83%
LD40W-10-C4000	YES	YES	3 - 10 VDC	4000 mA	+ 3%	40W	83%
LD40W-09-C4450	YES	YES	3 - 9 VDC	4450 mA	+ 3%	40W	82%

- Notes**
1. Typical efficiency measured at 230VAC input, full load
 2. For dimmable versions add appropriate designator to the end of the part number: For Example: LD40W-18-C2200-RD is 0-10V or resistance dimmable version, LD40W-18-C2200-PD is PWM dimmable version.
-RD 0-10V & Resistance dimmable version comes with an extra two wires +Purple/-Grey on the output side.
-PD PWM Dimmable version comes with an extra two wires +Purple/-Grey on the output side.
 3. -RD 0-10V Dimming is compatible with most quality 0-10V wall dimmers and direct 0-10V analog signal. See page 3 for details.
 4. -PD PWM version is PWM Dimmable via a positive 10% to 100% Duty Cycle, 500Hz to 1.5KHz, 0-10V Pulse. See page 4 for details.
 5. SAM Recognized.

40W**LD40W Series****DIMMING****LED Optimized Drivers**

40 Watt - LD40W Series


CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Constant Voltage Versions

Part Number	US Class 2	CN Class 2	Output Constant Voltage	Output Current Range	Voltage Accuracy	Output Power Maximum	Typical Efficiency ⁽¹⁾
LD40W-130	NO	NO	130 VDC	75 - 300 mA	± 5%	40W	87%
LD40W-114	NO	NO	114 VDC	75 - 350 mA	± 5%	40W	86%
LD40W-100	NO	NO	100 VDC	100 - 400 mA	± 5%	40W	86%
LD40W-89	NO	NO	89 VDC	113 - 450 mA	± 5%	40W	86%
LD40W-72	NO	NO	72 VDC	138 - 550 mA	± 5%	40W	85%
LD40W-54	YES	YES	54 VDC	175 - 700 mA	± 5%	40W	85%
LD40W-48	YES	YES	48 VDC	208 - 830 mA	± 5%	40W	85%
LD40W-45	YES	YES	45 VDC	225 - 900 mA	± 5%	40W	85%
LD40W-40	YES	YES	40 VDC	250 - 1000 mA	± 5%	40W	85%
LD40W-36	YES	YES	36 VDC	275 - 1100 mA	± 5%	40W	85%
LD40W-30	YES	YES	30 VDC	350 - 1400 mA	± 5%	42W	85%
LD40W-24 ⁽⁵⁾	YES	YES	24 VDC	418 - 1670 mA	± 5%	40W	85%
LD40W-22	YES	YES	22 VDC	455 - 1820 mA	± 5%	40W	85%
LD40W-18	YES	YES	18 VDC	550 - 2200 mA	± 5%	40W	84%
LD40W-15	YES	YES	15 VDC	670 - 2680 mA	± 5%	40W	84%
LD40W-13	YES	YES	13 VDC	770 - 3080 mA	± 5%	40W	84%
LD40W-12 ⁽⁵⁾	YES	YES	12 VDC	825 - 3330 mA	± 5%	40W	83%
LD40W-10	YES	YES	10 VDC	1000 - 4000 mA	± 5%	40W	83%
LD40W-09	YES	YES	9 VDC	1113 - 4450 mA	± 5%	40W	82%

Mechanical Dimensions: Inches [mm]

Material: Black PC ABS Plastic Case
Fully Encapsulated
Weight: 311 grams (11.0 oz) Typical

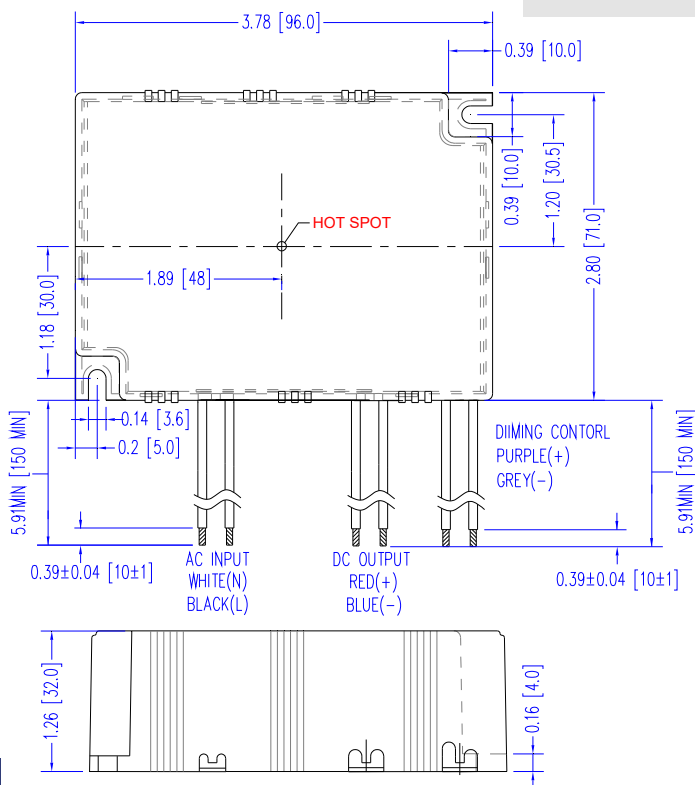**Labeling Example**

DC Output + = RED - = BLACK		LED Optimized Driver EPtronics, Inc. www.EPtronics.com 800 643-0688/310 536-0700	AC Input L = BLACK N = WHITE
Part Number: LD40W-54-C0700-RD Input Voltage: 90-305 VAC 50/60Hz Input Current: 0.56 Amp Max Output Voltage: 18-54 VDC Output Current: 700 mA Constant Current Output Power: 40W Max 0-10V CCR Dimmable Output UL & cUL Class 2 Output, UL Type HL			
IP66		 E325626 REV E1.2	0-10V Dim Input DIM+ = PURPLE DIM- = GRAY
Made in China			HG

40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LD40W Series
40W


-RD 2-Wire 0-10V CCR Dimming Scheme

Parameters	Minimum	Typical	Maximum
Source Current out of 0-10V Purple Wire	0mA	—	2mA
Absolute Voltage Range on 0-10V (+) Purple Wire	-2.0V	—	+15V
Sink Current into 0-10V Purple Wire	0mA	—	1.2mA


Notes

- RD 0-10V dimmable version comes with an extra two wires +Purple/-Grey on the output side.
- RD version is compatible with most 0-10V Wall Slide dimmers and direct 0-10V analog signal.
Recommended wall slide dimmer is Leviton IP710 or equivalent
- RD 0-10V dimmable version is not intended to dim below about 5% @ 0V or 10% @ 1.0V
- RD 0-10V dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.


-RD 2-Wire Resistance Dimming Scheme

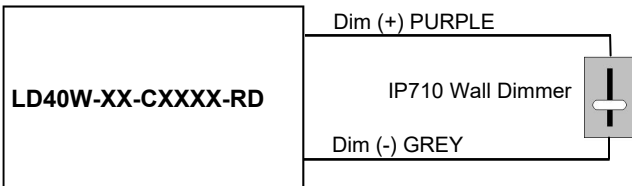

-RD 2-Wire 0-10V Analog Dimming Scheme

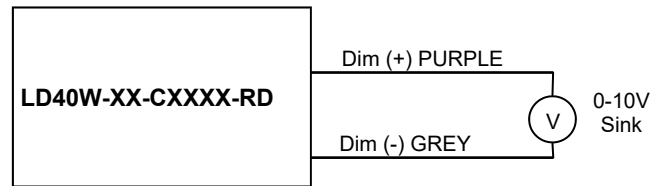

% Output Current vs. 0-10VDC Dimming Input

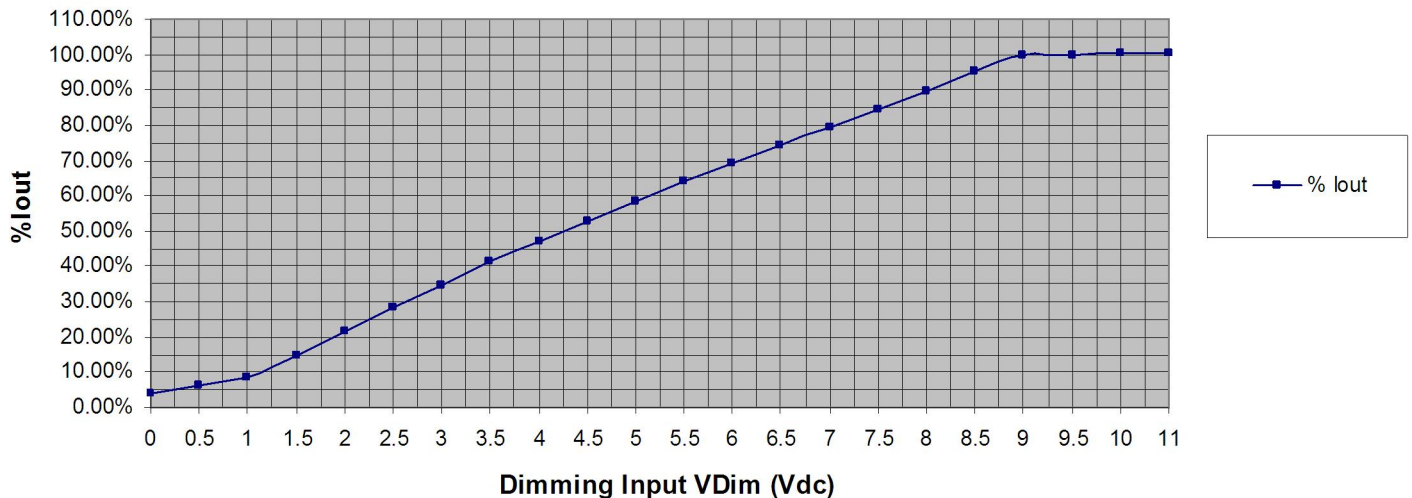

40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING


-PD 2-Wire CCR PWM Positive Dimming Scheme

Parameters	Minimum	Typical	Maximum
Absolute Maximum Voltage Range on PWM Input (Purple Wire)	-2.0V	10V	+15V
Input LOW Level Voltage Range (Purple Wire)	-2.0V	0V	+5.5V
Input HIGH Level Voltage Range (Purple Wire)	+9.0V	10V	+15V
Current into PWM Input (Purple Wire)	0mA	—	1.2mA
Source Current out of PWM Input (Purple Wire)	0mA	—	2mA
PWM Input Signal Frequency	500Hz	—	1500Hz
PWM Input Signal Positive Duty Cycle	0%	10-90%	100%


Notes

1. -PD PWM Dimmable version comes with an extra 2 wires +Purple/-Grey on the output side.
2. -PD PWM Dimmable version is not intended to dim below about 5% @ 0% Duty Cycle or 10% @ 10% Duty Cycle
3. -PD PWM dimmable version output will be 100% with Purple/Grey open and minimum with Purple/Grey Shorted.

-PD 2-Wire PWM Positive Dimming Scheme

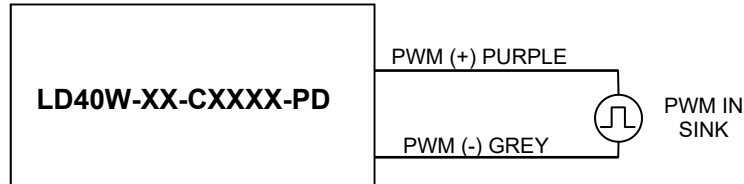

% Output Current vs. 1.0 kHz, Positive Duty Cycle Dimming Input

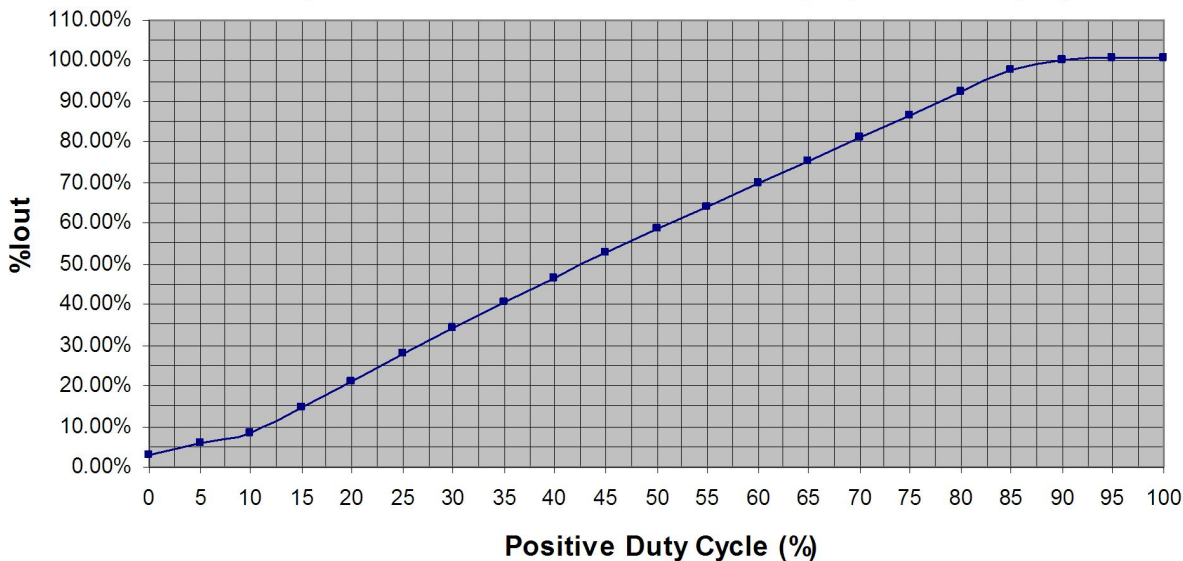

—■ % Iout

40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
LD40W Series
40W

Input Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Input Voltage	90 Vac	—	305 Vac	120, 230, 240, 277 Vac Nominal Values
Input Frequency	47 Hz	—	63 Hz	50/60Hz Nominal
Input AC Current	—	—	0.42 A	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.22 A	Measured at 230Vac/60Hz Input, Output Full load.
	—	—	0.19 A	Measured at 277Vac/60Hz Input, Output Full load.
Inrush Current (Peak)	—	14A	20A	Measured at 277Vac/60Hz Input, Output Full Load, Ta 25°C, Cold Start 50% Ipeak duration \approx 150 μ sec ($1/2 \cdot I_p^2 \cdot t$)
Inrush Current (I^2t)	—	—	0.015 A ² s	
Leakage Current	—	—	0.28mA	Measured at 120Vac/60Hz Input, Output Full load.
	—	—	0.75mA	Measured at 277Vac/60Hz Input, Output Full load.
THD	—	—	20%	Measured at \geq 60% Load, 120Vac/230Vac, \geq 80% Load 277Vac
Power Factor (PF)	0.90	—	—	Measured at \geq 60% Load, 120Vac/230Vac, \geq 85% Load 277Vac

Output Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
DC Output Voltage	Per Table	—	Per Table	Per Tables on Page 1
DC Output Constant Current	-3%	Per Table	+3%	Per Tables on Page 1
Output Power	—	—	Per Table	Per Tables on Page 1
Ripple & Noise (Vpk-pk)	—	—	20% Vo	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic.
Ripple (Ipk-pk)	—	—	50% Io	20 MHz BW, Full load output in parallel with 0.1 μ F ceramic & 10 μ F Electrolytic. 120 Hz component
Start-up Time	—	700 mS	1000 mS	Measured at 120Vac/60Hz Input, Output Full load.
Hold-up Time	—	30 mS	—	Typical @ 277Vac Input, Output Full load.

Environmental Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Case Temperature (Tc)	-30 °C	—	+90 °C	Measured at location specified on case.
Operating Temperature (Ta)	-30 °C	—	+60 °C	This is a reference range. Tc controls temperature range.
Storage Temperature (Ts)	-40 °C	—	+85 °C	Non operating temperature range.
Operating Humidity	—	—	95% RH	Relative Humidity, non-condensing.
Vibration	5 Hz	—	55 Hz	2G, 10 minutes/1 cycle, period 30 minutes, each along X, Y, Z axis.
MTBF	342,000 Hours	—	—	MIL-HDBK-217F Notice 2, Ta = 25C, Output Full Load.

Protection Specifications

Parameter	Min.	Typ.	Max.	Notes/Conditions
Output Short Circuit (SCP)	—	—	—	No Damage, Auto recovery after short is removed.
Output Over Current (OCP)	—	—	+8% Io	Constant Current Limiting circuit.
Output Over Voltage (OVP)	—	—	120% Vo	No Damage, Auto recovery after fault is removed.

40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Safety Compliance


Safety	Notes/Standards
UL/CUL	UL8750, UL1310 for UL Class 2 & CAN/CSA C22.2 No. 250.13, UL Type HL
CE	EN61347-1, EN61347-2-13
Withstand Voltage	Input to Output: 3750 Vac
Isolation Resistance	Input to Output: >100 MΩ, 500VDC @ 25 °C, 70 % RH
Dimming Circuit	Dim+ Purple/Dim- Grey are considered part of the secondary circuit.

EMC Compliance

Standard	Notes/Conditions
FCC, 47CFR Part 15	Class B
EN 55015	Limits and methods of measurement of radio disturbance characteristics of electrical lighting and similar equipment.
EN 61000-3-2	Part 3-2: Limits for harmonic current emissions Class C, $\geq 80\%$ Rated Power
EN 61000-3-3	Part 3-3: Limitation of voltage changes, voltage fluctuations and flicker.
EN 61000-4-5	Part 4-5: Surge Immunity test, 2 kV L-N, 4 kV L-FG & N-FG
Energy Star	Energy Star transient protection: Ballast or driver shall comply with ANSI/IEEE C62.41.1-2002 and ANSI/IEEE C62.41.2-2002, Category A operation. The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.

Power Factor Curves (Typical)

PF vs. Output Power

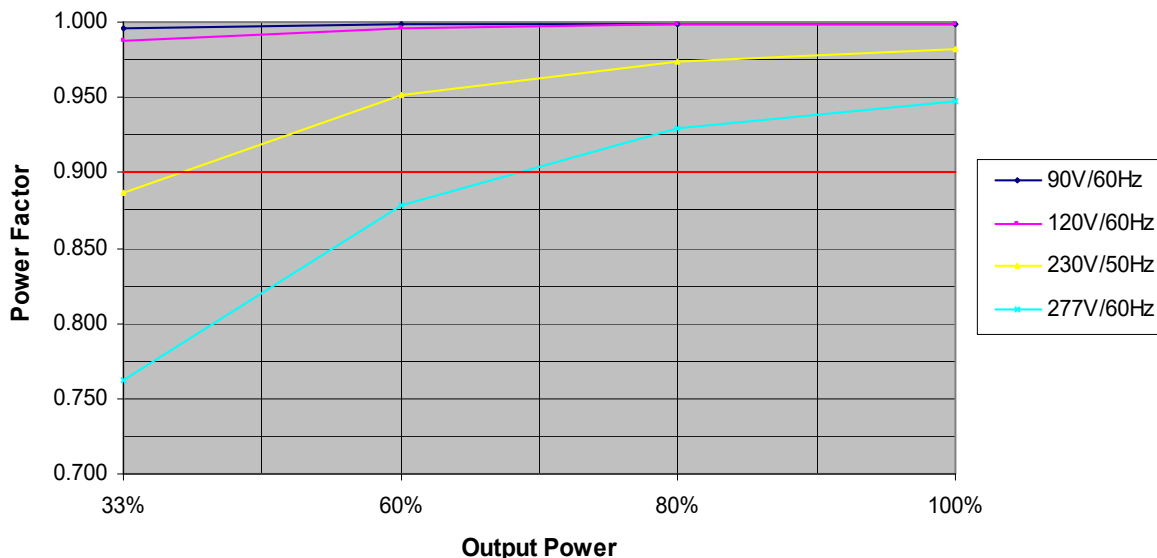


40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

DIMMING
 LD40W Series
40W


THD Curves (Typical)

THD vs. Output Power

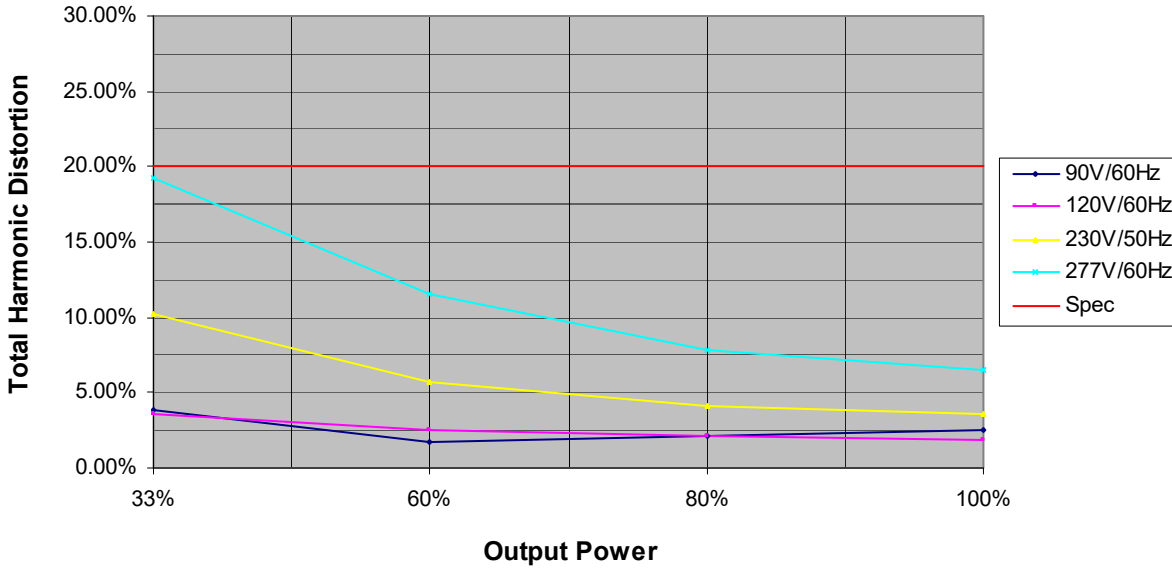

Efficiency Curve (Typical)

Efficiency vs. Output Power

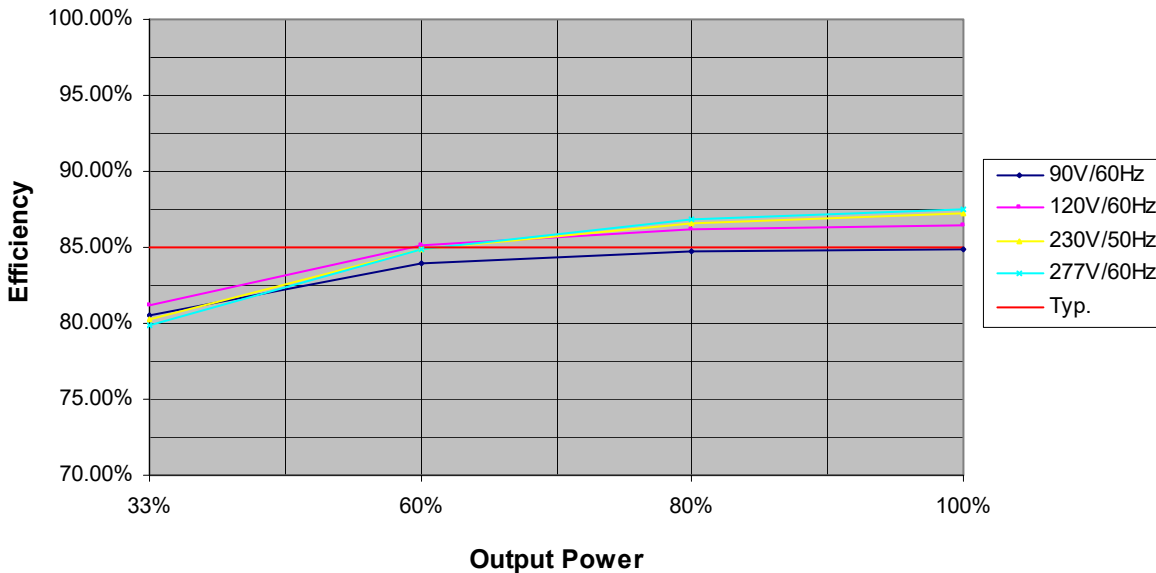


40 Watt - LD40W Series

CONSTANT VOLTAGE OR CONSTANT CURRENT LED DRIVER WITH DIMMING

Life vs. Ambient Temperature

LD40W Estimated Life Full Load @ 120Vac

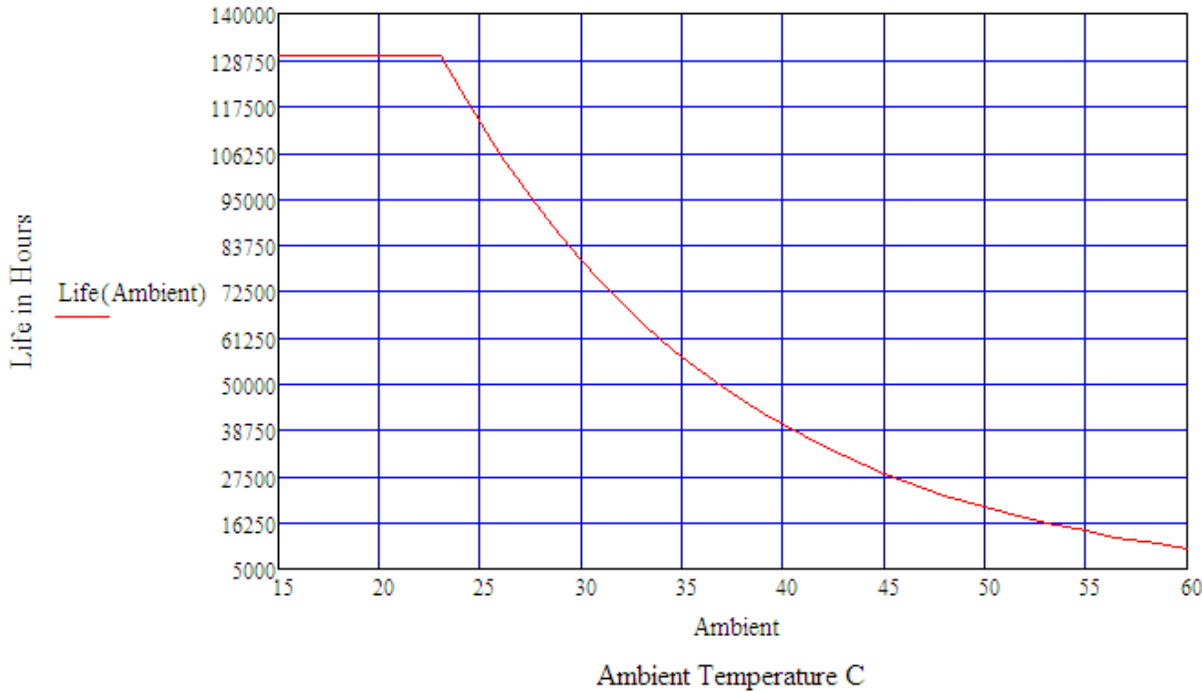

Life vs. Case (Tc) Temperature

LD40W Estimated Life Full Load @ 120Vac

