














Assembly instruction

Please read the assembly instructions below carefully before assembly and make sure you have the parts & hardware as identified on the parts list.

Item	Photo	Description	Qty	Item	Photo	Description	Qty
A		Backrest Panel	1	F		Bolts (8*25mm)	4
B		Chair Seat Panel	1	G		Washers (8mm)	4
C		Right arm	1	H		Springs Washers (8mm)	4
D		Left arm	1	I		Nuts (8mm)	4
E		Bolts (8*18mm)	4	J		Plastics cap	4
K		Wrench	1	L		Wrench	1

- Place all parts on a clean soft surface.
- Attach the backrest panel (A) and the chair seat panel (B) to the right arm (C) , using the bolts (E) for backrest panel and bolts (F) Washers(G), Spring washers(H) and Nuts (8mm)(I)for the Chair seat Panel, Attach the backrest panel (A) and the chair seat panel (B) to the Left arm (D) using the bolts (E) for backrest panel and bolts (F) Washers(G), Spring washers(H) and Nuts (8mm)(I) for Chair seat panel like as follows:.
- Then tighten the Nuts using the wrench . DO NOT over tighten .

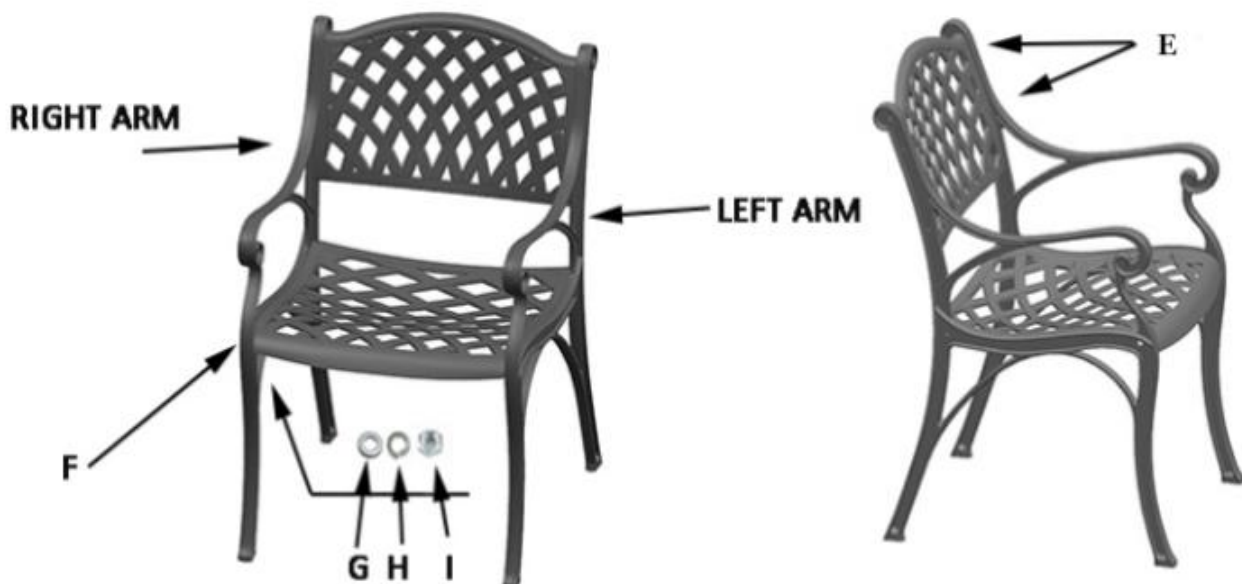

- Adjust the pre-installed Rubber Caps until the chair is level with the ground .
- Your Chair is ready for use now.