

Warning and Maintenance
























1. Do not discard any packaging until you have checked that you have all parts and fittings.
2. Ensure you have enough room for safe assembly. Ensure children and pets are kept out of the assembly area.
3. We suggest you carry out the assembly on a soft surface like a carpet or the opened box, so as to avoid scratching the paint.
4. Please note that this products is made of cast metal, you may find some unevenness on the surface which entirely normal for cast metal and is not a defect.
 1. Always lift and carry instead of dragging as dragging can cause damage.
 2. Clean with warm water and a lint free cloth.
 3. Do not use abrasive or corrosive cleaners.

ASSEMBLY INSTRUCTIONS




PLEASE READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING ASSEMBLY

PARTS LIST

Part No.	Description	Part picture	Qty	Part No.	Description	Parts Picture	Qty.
①	Table Top		1	A	M8 Flat washer		23
②	Table leg		3	B	M8 Spring washer		23
③	Leg Support		1	C	M8 Nuts		23
④	Backrest		2	D	M6*30 Stud		10
⑤	Chair Seat		2	E	M6 Flat washer		18
⑥	Front Chair Legs		4	F	M6 Spring washer		18
⑦	Back Chair Legs		4	G	M6 Nuts		18
⑧	Left arm		2	H	M6*25 Stud		8
⑨	Right Arm		2	I	M6 protect hats		18
⑩	Screwdriver		1	J	M8 protect hats		23
⑪	Wrench		1	k	Stud M8		3
L	Rubber Leg Pad		11	Note:Rubber Leg Pad L have been presaaembled			

INSTRUCTIONS

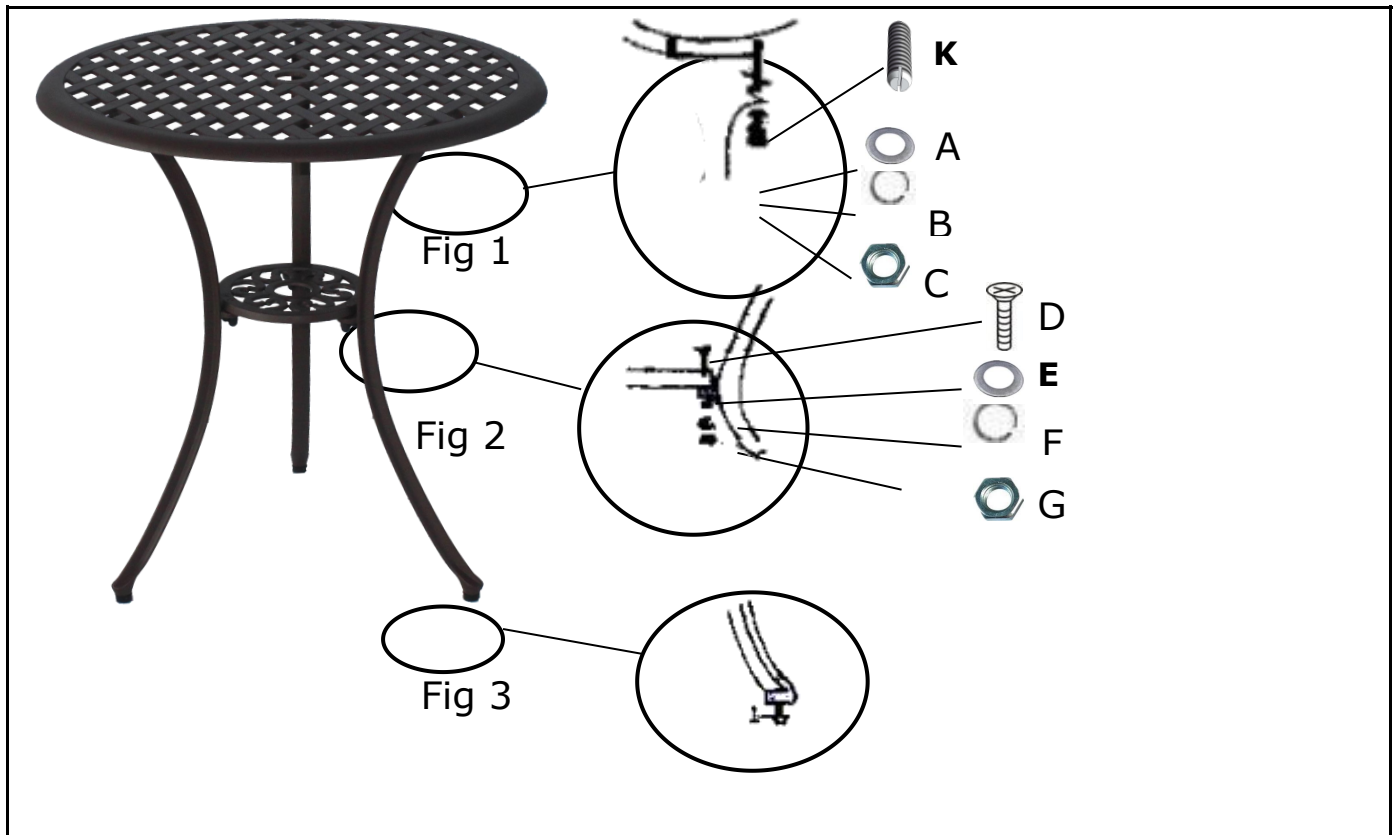


Step 1: Place all parts on a clean and soft surface.

Step 2: Attach the table legs (2) using the stud (K) x3 on the table top, using washers and nuts (A, B, C), Tighten using a wrench and a washer (as a one line screw driver) (Fig 1)


Step 3: Attach the leg support (3) to the table leg (2) using 2x studs (D), washers, and nuts (E, F, G). Tighten the nuts using the wrench. DO NOT over tighten (Fig. 2)

Step 4: Turn over the table and tighten all nuts with wrench. Adjust the preassembled rubber pad (L) at the end of each table leg until the table is level with the ground. (Fig 3) Tighten all the nuts and cover them with nut caps (I & G).

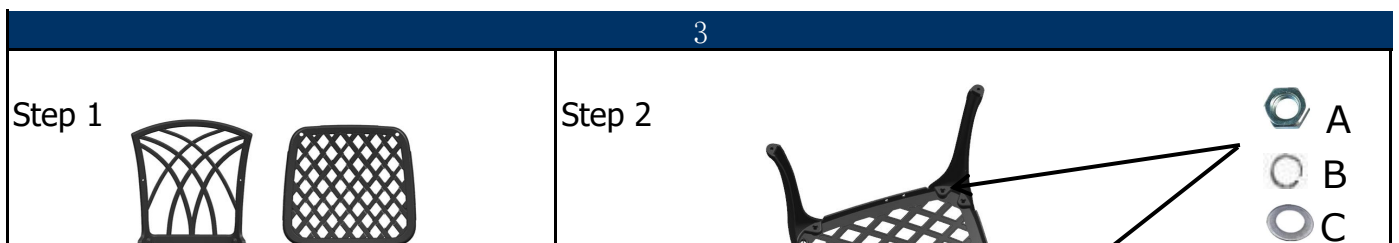



Place all parts on a clean and soft surface




Attach the front and back Legs (⑥,⑦) to the Studs on the Chair Seat (⑤) using 8xWahers and 8xNuts (A,B,C).Tighten the Nuts using the wrench & tighten.

Step 3



Attach the Backrest (④) to the Chair Seat (⑤) using 2xWashers and 2xNuts (A,B,C).Tighten the Nuts using the wrench ..DO NOT over tighten.

Step 4

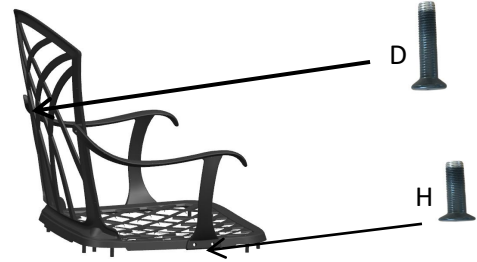

Attach the Right and Left Arm(⑧,⑨) ,using 1xthe studs (D) and 2xwasher,nuts (E,F,G) ,DO NOT over tighten .and then using2x Studs (H) and Wahers and Nuts (E,F,G).Adjust to a correct place ,then tighten D&H.

Step 5



Adjust the pre-installed Rubber Pad (L) until the chair is level with the ground , Upon completion of full assembly and bolted up-all screws can be tightened down.Tighten all the nuts and cover them with nut caps(I&J).