




☐ Cold White (5000K)

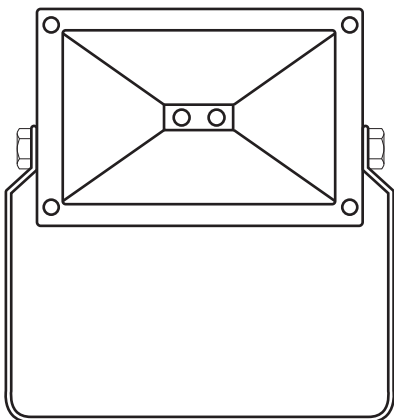

Product Name

FL109030C--CWC: Floodlight 30W : 120V AC

Product Specification

Input Voltage: 100-277V AC, 60Hz

Input Power: 30W

Power Factor: PF \geq 0.90

Luminance: 2100lm

Luminous efficacy: 77lm/w

Beam Angle: 120°

Main Structure: Aluminum + Tempered Glass

LED Chip: CREE

IP Rating: IP65

CRI: >82

Color Temperature.: 5000K

Environment Specification

Operating Temperature: -20°C ~ 40°C

Environmental Humidity: 10% ~ 90%

Product Features

Silent Operation

Suitable on damp locations

Substantial Energy Saving

No Flicker

Instant On

Excellent For Cold Weather Applications

Environmentally Friendly

No UV or IR Radiation


Extensive Range of Applications

Certification





☐ Cold White (5000K)

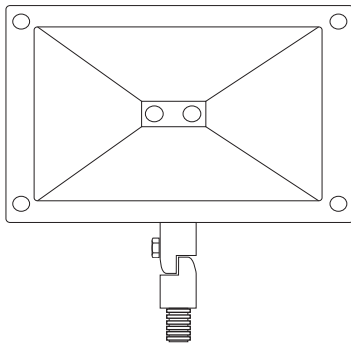

Product Name

FL109030I--CWC: Floodlight 30W : 120V AC

Product Specification

Input Voltage: 100-277V AC, 60Hz

Input Power: 30W

Power Factor: PF \geq 0.90

Luminance: 2100lm

Luminous efficacy: 77lm/w

Beam Angle: 120°

Main Structure: Aluminum + Tempered Glass

LED Chip: CREE

IP Rating: IP65

CRI: >82

Color Temperature.: 5000K

Environment Specification

Operating Temperature: -20°C ~ 40°C

Environmental Humidity: 10% ~ 90%

Product Features

Silent Operation

Suitable on damp locations

Substantial Energy Saving

No Flicker

Instant On

Excellent For Cold Weather Applications

Environmentally Friendly

No UV or IR Radiation

Extensive Range of Applications

Certification

