



TRTL0360


Magnitude Lighting dimmable voltage LED driver is class 2 rated and designed to operate with any standard MLV/Incandescent TRIAC (Leading edge) dimmer switch. Encased in a low profile aluminum enclosure that includes 2 knock-outs to enable easy installation makes it the perfect choice for under cabinet lights, tape lights and various LED fixtures installations. Our electrical specification includes Auto Reset, over current and short circuit protection. Efficiency of 90% and higher allows the driver to operate at low temperatures.

FEATURES

- Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch
- Dim down to 1%
- Super compact aluminum case
- Class 2
- UL 8750
- Nema 3R - Outdoor Use
- Auto-Reset Protection for short circuits & over-voltage
- FCC 15 part 2

DIMENSIONS

DIMENSIONS (in MM)

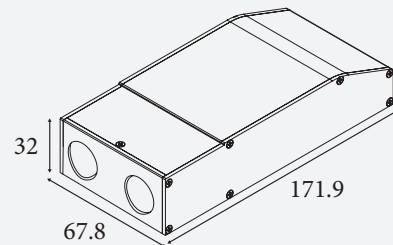

SPECIFICATIONS

- Max Load: 60W
- Input Voltage: 120V AC
- Input Current at Max Load: 0.41 A
- Output Voltage: 24V DC
- Output Current at Max Load: 1.75 A
- Power Factor: 0.95
- Efficiency: > 90%
- Dimensions L*W*H: 6.77 x 2.67 x 1.26"
- Weight: 17 oz

COMPATIBLE DIMMERS

Lutron Skylark	Lutron Diva
S-103P	DVCL-153PH
S-603P	DVCL-153P
S-10P	DVCL-253P
S-600P	DVSCCL-153P
	DVSCCL-253P
Lutron Rotary	DV-103P
D-603P	DV-103P
DNG-603PH-DK	DVSC-103P
DNG-600P	DVSC-603P
D-600R	DV-10P
	DV-600P
Lutron Maestro	DVSC-10P
MA-1000	
MSC-600M	Leviton Illumatech
	IPM06-1LZ
Lutron Nova Dimmer	IPM06-1LX
N-1500	IPM10-1LZ
N-2000	
N-1000	Leviton Vizia
N-600	VPM06-1LZ
N-1003P	
N-603P	