PURPLE PASSION

Designed by Darlene Zimmerman for RK www.robertkaufman.com

Featuring





Finished quilt measures: 60" x 77-1/2"

Difficulty Rating: Beginner



Fabric and Supplies Needed

Fabric amounts based on yardage that is 42" wide.

Color	Fabric	Name/SKU	Yardage	Color	Fabric	Name/SKU	Yardage
KONA NCOLOR	A	K001-1987 COSMOS	3-1/8 yard (includes binding)		C	K001-485 BALLERINA	1/2 yard
	В	K001-489 GUMDROP	1 yard		D	K001-1339 SNOW	1-7/8 yards
Copyright 2021, Robert Kaufman For individual use only - Not for resale				You will also need: 4-3/4 yards for backing Half-square Triangle and Companion Angle (both by EZ Quilting)			

Note: If not using the tools, cut 3-3/8" strips for the half-square triangles, cut once on the diagonal. Cut 6-1/4" squares for the Companion Angle triangles, cut twice on the diagonal.

Notes Before You Begin

- Read through all of the instructions before beginning.
- All of the seam allowances are 1/4" unless otherwise noted.
- Press seam allowances open unless otherwise noted.
- Width of fabric (WOF) is equal to at least 42" wide.
- Right sides together has been abbreviated to RST.
- Remember to measure twice and cut once!

Cutting Directions for Large Triangle units.

Layer the Fabric A and Fabric D right sides together in pairs and cut pairs of triangles with the Companion Angle tool.

From each of Fabrics A and D, cut:

eight 3" x WOF strips. Following the Large Triangle cutting directions above, subcut: ninety-six pairs of Companion Angle triangles

Step 1 Sew on one short edge of the triangle-pair, Fabric D on top. Press toward the Fabric A triangle. Make ninety-six pairs.



Step 2 Sew two units from Step 1 together to make the hourglass units. Press the seams open. Make forty-eight units. At this point the units should measure 5-1/2" square. Trim off the dog-ears.



Cutting Directions for Small Triangle units.

Layer the Fabric C and and Fabric D strips right sides together and cut triangle pairs with the Half-square Triangle tool.

From each of Fabrics C and D, cut:

five 3" x WOF strips. Following the Small Triangle cutting directions above, subcut: ninety-six pairs of Half-Square triangles

From Fabric D, cut:

seven 3" x WOF strips. Subcut: ninety-six 3" squares

Step 1 Sew the half-square triangle pairs together on the diagonal edges. Press toward the Fabric C triangle. Trim off the points. Make ninety-six pairs. At this point the triangle-squares should measure 3" square.



Step 2 Sew a Fabric D square to the right edge of the triangle square as shown. Press toward the Fabric D square. Repeat to make ninety-six units.



Step 3 Sew the units from Step 2 together to form Small Triangle Units as shown. Press the seam open. Make forty-eight units. At this point the units should measure 5-1/2" square.



Cutting Directions for the Center Units and Border Cornerstones

From Fabric A, cut:

three 5-1/2" x WOF strips. Subcut: sixteen 5-1/2" squares

From Fabric B, cut:

five 3" x WOF strips. Subcut: sixty-four 3" squares


Step 1 Mark a diagonal line on the back side of each of the Fabric B 3" squares. Place a small Fabric B square on the corner of the large Fabric A square. Sew on the diagonal. Trim excess fabric and press toward the small triangle. Repeat for each of the corners. At this point the unit should measure 5-1/2" square. Make sixteen units. Save four units for the border corners.






Assembling the Blocks


Step 1 Sew two small triangle units to the right and left side of the large Fabric A triangle unit. Repeat to make twenty-four units. Press toward the center units.



Step 2 Sew a center unit between two large Fabric A triangle units. Make twelve. Press toward the Fabric A triangle units.



Step 3 Join the Step 1 and 2 units to make the Blocks. Make twelve Blocks. Press toward the center of the blocks. At this point the blocks should measure 15-1/2" square.



Cutting Directions for Sashes, Cornerstones, Borders and Binding

From Fabric A, cut:


three 3" x WOF strips. Subcut: seventeen 3" x 5-1/2" rectangles seven 5-1/2" x WOF strips. Set aside for the Borders. eight 2-1/2" x WOF strips. Set aside for the Binding.

From Fabric B, cut:


one 3" x WOF strip. Subcut: six 3" squares for the cornerstones five 3" x WOF strips. Subcut: thirty-four 3" x 5-1/2" rectangles

Step 1 Assemble a vertical sashing strip with two Fabric B rectangles, and one Fabric A rectangle. Press toward the lighter rectangles. Make eight.


Step 2 Sew two vertical sashing strips between three blocks. Press toward the sashing. Repeat to make four rows of blocks.

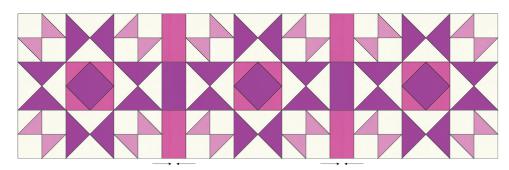

Step 3 Sew three sashing units together with two cornerstones to make a horizontal sash. Make three. Press toward the sashing units.

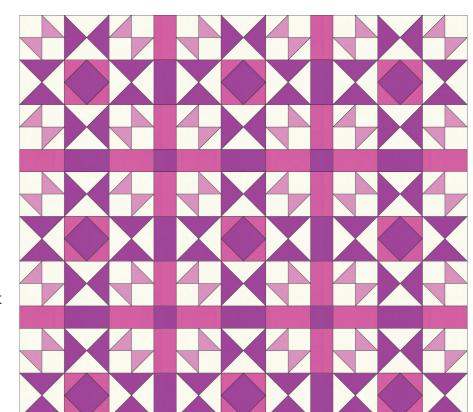

Step 4 Sew the horizontal sashing strips between the block rows, matching and pinning seam intersections. Press toward the sashing rows.

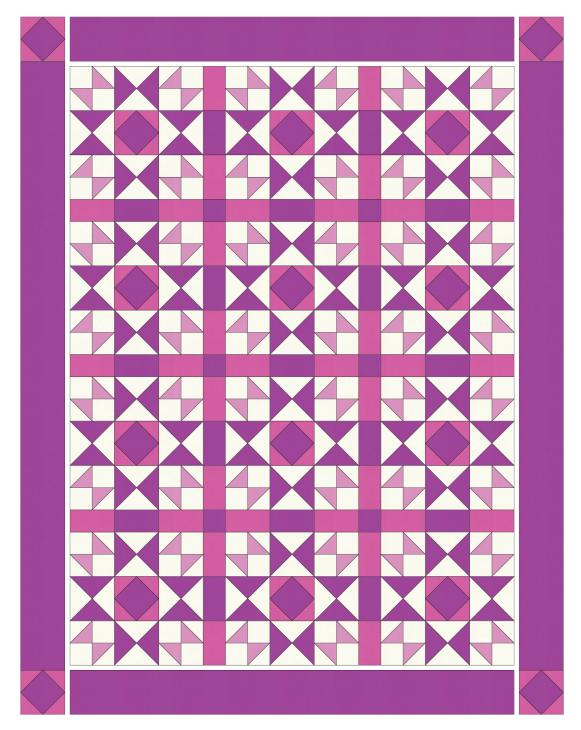

Step 5 Piece, measure and trim two 5-1/2" wide Fabric A borders the width of the quilt top.

Step 6 Piece, measure and trim two 5-1/2" wide Fabric A borders to the length of the quilt top. Sew Center Units to both ends of the side borders. Press toward the borders.

Step 7 Sew the top and bottom border strips to the quilt. Press toward the borders. Repeat for the side borders.

Your quilt top is finished! Baste, quilt, bind and enjoy!

This pattern may be used for personal purposes only and may not be reproduced in any form without the express permission from Robert Kaufman Fabrics. This pattern is not for resale. All patterns, unless otherwise attributed, are © Robert Kaufman Co., Inc. 2005-2021. All rights reserved.