


NEMA 5-15P(MSL-105)

IEC 320 C13(MSL-107)

PACKING B: >3M

PACKING A: <3M

P1.P2: E210037

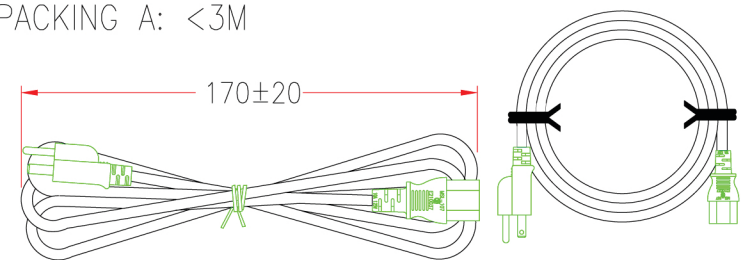

CABLE MARKING:

⚠ (UL) SVT 3/C 18AWG(0.824MM²) VW-1 75°C 300V E204978

SVT 3/C 0.824MM²(18AWG) FT2 60°C 300V 204790 MSL

	P1		P2
BLACK	L	————	L
WHITE	N	————	N
GREEN	E	————	E

CSA NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
3	UL SVT 18AWG*3C, OD 6.3mm, JACKET BLACK SHINY DRAWING No. EPSVT011803C-008	H5TB02-0304K09	L-30mm M304
	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
2	BRACKET: YS-003	A1QC14-0767	1 M767
	TERMINAL: 2*4mm, 98744BS-0/A	A1QB24-0257	3 M257
1	MOLDED PVC 35P, COLOR BLACK	H1BC02-0304K09	M304
	BRACKET: YS-002	A1QC07-0767	1 M767
	TERMINAL: 98661BS-1	A1QB01-0257	2 M257
	TERMINAL: ø4.75, 321203	A1QB06-0769	1 M769

⚠ REV.3 2009.10.22	MODIFY MODEL
⚠ REV.2 2009.09.10	MODIFY CABLE MARKING
⚠ REV.1 2009.09.04	MODIFY LABEL

APPROVED	CHECKED	DRAWING	DESCRIPTION	POWER SUPPLY CORDS & CORDS SETS	UNIT: mm
	HU	CHEN	DRAWN NAME		
			PRODUCT NO.		

NOTE: Cable Length Unless Otherwise Spec. Tolerances: Under 6FT ±25mm; Another ±50mm