





ercol
ENGLAND SINCE 1920

FABRIC COLLECTION

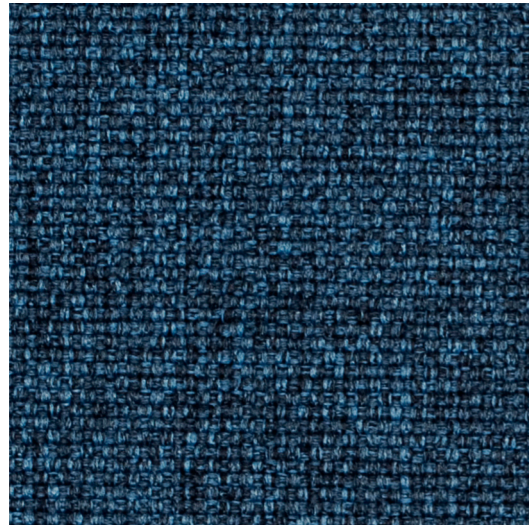


Medley

E - 66010

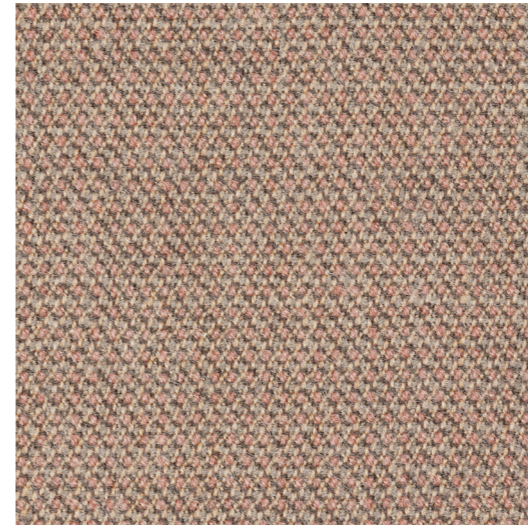


Capture

J - 4803




Remix

J - 143



Capture

J - 5201




Remix

J - 873



Medley

E - 61189



Hallingdal

K - 227




Victory

L - Straw




Victory

L - Cognac




Medley

E - 60003




Fame

G - 67067




Hallingdal

K - 840




Steelcut Trio

K - 515




Steelcut Trio

K - 576




Fame

G - 64089




Remix

J - 982

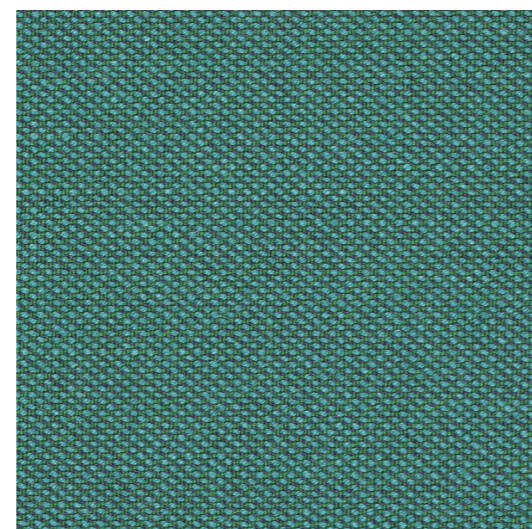


Steelcut Trio

K - 976




Hallingdal

K - 116



Capture

J - 4001



Europost2

J - 62061




Europost2

J - 68030




Europost2

J - 60016



Fame

G - 60019

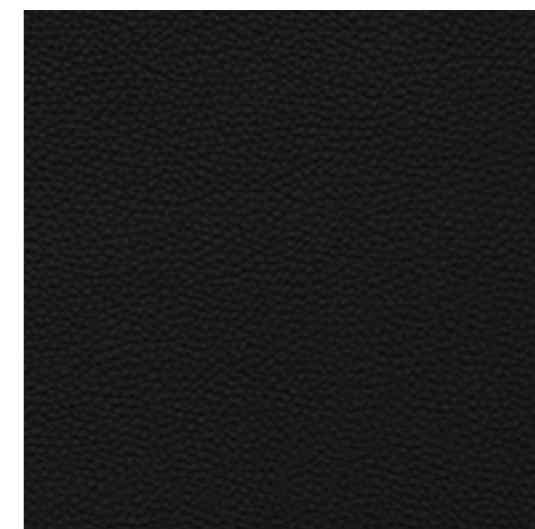

Victory

L - Black

GABRIEL: MEDLEY

Ercol Fabric Grade	E-grade	
Composition	100% polyester	
Width / Weight	140cm / 510g	
Durability (martindale rubs)	75,000	
Piling	EN ISO 12945-2	4
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Care	Wash or dry cleaning P(W)	
Fire Tests	BS EN 1021 1&2 Cigarette and Match BS EN 1021-1 Cigarette CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Oeko-Tex 100% free of heavy metals	

GABRIEL: CAPTURE

Ercol Fabric Grade	J-grade	
Composition	85% wools of New Zealand / 15% polyamide	
Width / Weight	140cm / 475g	
Durability (martindale rubs)	200,000	
Piling	EN ISO 12945-2	4-5
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Care	dry cleaning P(S)	
Fire Tests	BS EN 1021 1&2 Cigarette and Match BS 5852 Part 1 0,1 Cigarette & match CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Oeko-Tex EU Ecolabel 100% free of heavy metals	

KVADRAT: REMIX 2

Ercol Fabric Grade	J-grade	
Composition	90% New wool (worsted), 10% Nylon	
Width / Weight	138cm / 415g	
Durability (martindale rubs)	100,000	
Piling	scale 1-5, max. 5 - EN ISO 12945-2	4
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5
Care	dry cleaning P(S)	
Fire Tests	BS 5852 Crib 5 with treatment BS 5852 part 1 US Cal. Bull. 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Complies with EU ecolabel	

KVADRAT: STEELCUT TRIO 3

Ercol Fabric Grade	K-grade	
Composition	90% New wool (worsted), 10% Nylon	
Width / Weight	140cm / 770g	
Durability (martindale rubs)	100,000	
Piling	scale 1-5, max. 5 - EN ISO 12945-2	4
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5
Care	dry cleaning P(S)	
Fire Tests	BS 5852 part 1 BS 5852 Crib 5 with treatment US Cal. Bull. 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Complies with EU ecolabel	

GABRIEL: FAME

Ercol Fabric Grade	G-grade	
Composition	95% wools of New Zealand / 5% polyamide	
Width / Weight	140cm / 630g	
Durability (martindale rubs)	200,000	
Piling	EN ISO 12945-2	4
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Care	dry cleaning P(S)	
Fire Tests	BS EN 1021-1 Cigarette BS EN 1021-2 Match CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Oeko-Tex EU Ecolabel 100% free of heavy metals	

GABRIEL: EUROPOST 2

Ercol Fabric Grade	J-grade	
Composition	100% wools of New Zealand	
Width / Weight	140cm / 800g	
Durability (martindale rubs)	50,000	
Piling	EN ISO 12945-2	4
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	5-7
Care	dry cleaning P(S)	
Fire Tests	BS EN 1021 1&2 Cigarette and Match CA TB 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Oeko-Tex EU Ecolabel 100% free of heavy metals	

KVADRAT: HALLINGDAL 65

Ercol Fabric Grade	K-grade	
Composition	70% New wool, 30% Viscose	
Width / Weight	130cm / 795g	
Durability (martindale rubs)	100,000	
Piling	scale 1-5, max. 5 - EN ISO 12945-2	3
Lightfastness	scale 1-8, max. 8 - EN ISO 105-B02	7
Care	dry cleaning P(S)	
Fire Tests	BS 5852 Crib 5 BS 5852 part 1 US Cal. Bull. 117-2013 Will also pass other flammability standards. Flame retardant performance is dependent upon the foam used. Contains no flame retardant chemical.	
Sustainability/ Environmental Data	Complies with EU ecolabel	

SORENSEN: VICTORY

Ercol Fabric Grade	L-grade.	
Composition	Protected Leather	
Width / Thickness	5.0 – 6.5 m ² / 1.3-1.5mm	
Tearing Load	DIN EN ISO 3377-1	55
Lightfastness	DIN EN ISO 105-B02	5
Care	Cloth with soap flakes dissolved in warm water	
Colour Fastness to rubbing	DIN EN ISO 11640 - Dry 500 rubs Wet 80 Rubs & Perspiration 50 rubs	4
Fire Tests	Leather will become lighter as time passes UNI EN 1021-1 and 2 - Non Ignition	
Finish Adhesion	DIN EN ISO 1644/UF 470	6.6
Flexing Endurance	DIN EN ISO 5402 (Cracks)	50,000
Sustainability/ Environmental data	PCP: According to EU Council Directive 76/769/EEC AZO dyes: According to EU Council Directive 76/769/EEC Chrome VI: does not contain chrome VI	
Reach	According to European Community Regulation on chemicals and their safe use (EC 1907/2006)	