

Technical Information

Introduction

Opteon™ SF10 specialty fluid is a clear, colorless, nonflammable, thermally stable, fluorinated fluid developed in response to worldwide market demand for a low environmental impact solvent for cleaning, as a carrier fluid, and many other applications. The fluid has a boiling point of 110 °C (230 °F), zero ozone depletion potential (ODP), and a very low global warming potential (GWP) of 2.5 (100-yr ITH). Opteon™ SF10 specialty fluid is appropriate to replace PFCs, PFPEs, HFEs, HFCs, and HCFCs in carrier fluid applications.

Typical Applications

- Cleaning agent
- Carrier fluid in coatings, inks, lubricants, and adhesives
- Aerosol solvent

Safety, Toxicity, and Environmental

Opteon™ SF10 specialty fluid is a nonflammable fluid and does not become flammable during boiling or evaporation. The material has safe toxicity profile in mammalian studies, and it's not a skin or eye irritant in laboratory tests. In environmental studies, Opteon™ SF10 specialty fluid exhibited low concern for aquatic life. Results of extensive toxicity testing studies are available in the Safety Data Sheet (SDS).

Environmental Properties


Property	Opteon™ SF10 Specialty Fluid
Ozone Depletion Potential (ODP)	0
Global Warming Potential (GWP) 100-yr ITH	2.5

Physical Properties

Property (at 25 °C [77 °F])	Units	Opteon™ SF10 Specialty Fluid
Molecular Weight	-	362
Boiling Point	°C (°F)	110 (230)
Freezing Point	°C (°F)	<-90 (<-130)
Critical Temperature	°C (°F)	240 (464)
Kb Value		6
Liquid Density	kg/m ³ (lb/gal)	1580 (13.1)
Liquid Viscosity	cSt	0.71
Heat Capacity	kJ/kg-K	1.24
Liquid Thermal Conductivity	W/m-K	0.077
Surface Tension	dyn/cm	18
Vapor Pressure	kPa	2.9
Heat of Vaporization	kJ/kg	115
Solubility in Water	ppm (w/w)	<1
Water Solubility	ppm (w/w)	80
Flash Point, CC, ASTM D56	-	None
Flash Point, OC, ASTM D1310	-	None
Vapor Flammability, ASTM E681	-	None


Vapor Pressure

Please refer to the following equation to predict vapor pressure as a function of temperature.

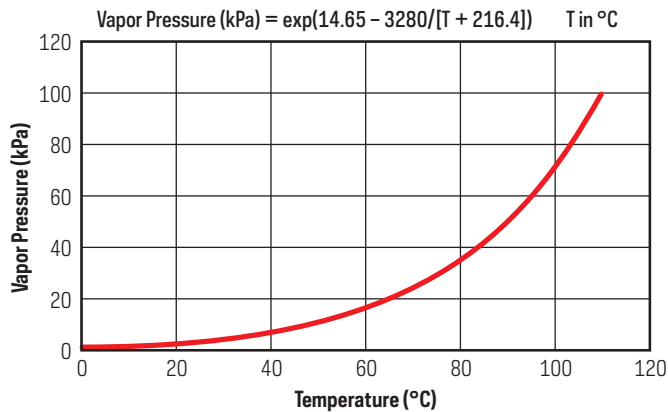


Liquid Viscosity

The temperature dependence of liquid viscosity for Opteon™ SF10 specialty fluid is shown below.

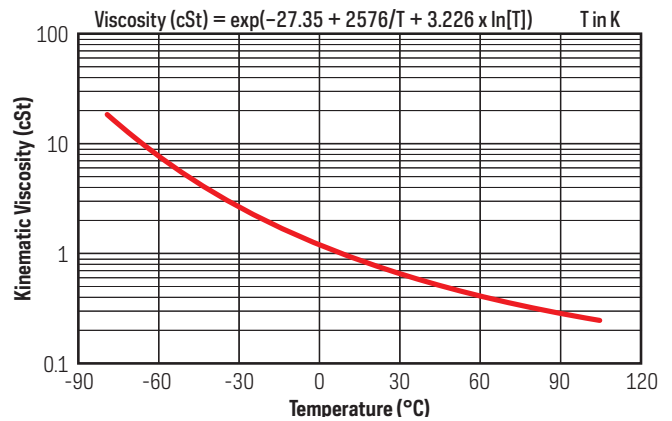

Liquid Density

The temperature dependence of liquid density for Opteon™ SF10 specialty fluid is shown below.

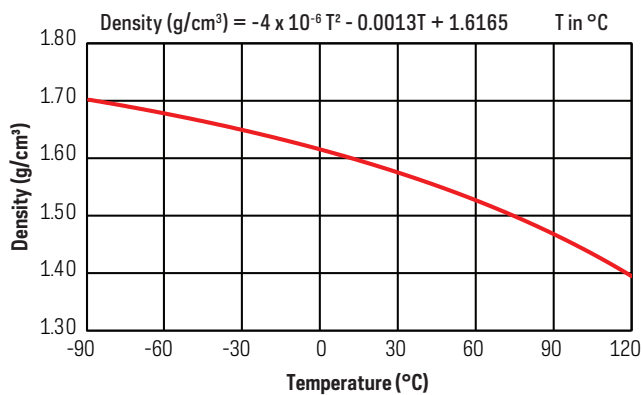

Storage and Handling

Opteon™ SF10 specialty fluid is thermally stable and does not oxidize nor degrade during storage. Store in a clean, dry area. Protect from freezing temperature, and do not allow stored container to exceed 46 °C (115 °F). Package sizes for Opteon™ SF10 specialty fluids are net weight 6 kg,* 7.5 kg,* and 15 kg in HDPE containers and 300 kg stainless steel drums. When pumping or transferring Opteon™ SF10 specialty fluid from a drum or pail, a braided stainless steel hose is recommended. If a flexible hose is desired, a static charge dissipation hose is recommended, i.e., one constructed with carbon black-filled nylon inner core conductive material.

*Available in selected markets; contact Chemours or your local technical representative for additional information.

For more information on the Opteon™ family of refrigerants, or other refrigerants products, visit opteon.com or call (800) 235-7882.

The information set forth herein is furnished free of charge and based on technical data that Chemours believes to be reliable. It is intended for use by persons having technical skill, at their own risk. Because conditions of use are outside our control, Chemours makes no warranties, express or implied, and assumes no liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe, any patents or patent applications.

© 2020 The Chemours Company FC, LLC. Opteon™ and any associated logos are trademarks or copyrights of The Chemours Company FC, LLC. Chemours™ and the Chemours Logo are trademarks of The Chemours Company.

Replaces: K-28834
C-10840 (3/20)