




Over 90 Years Of Quality Foodservice  
Products And Service

Job \_\_\_\_\_ Item No. \_\_\_\_\_

## Refrigerated Cold Pans Extra Capacity 4/3 Pans Models

- RCP-143  RCP-243  RCP-343
- RCP-443  RCP-543  RCP-643

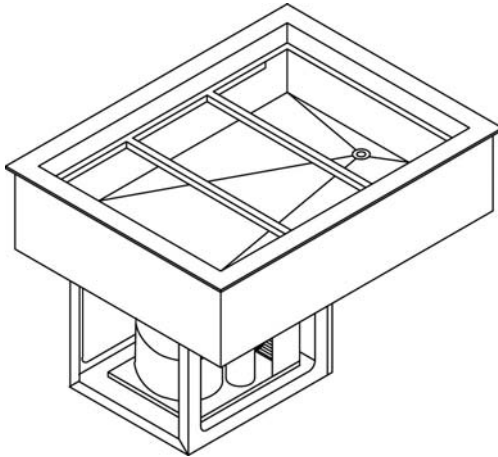

Model RCP-343

### DESCRIPTION

Wells Refrigerated Drop-In Cold Pans hold pre-chilled food products at cold, fresh and safe serving temperatures. All models are completely self-contained in one to six-well models each well holding 4 each 3rd size pans with individual thermostatic controls, and CFC free and include an 8 ft. 120V cord and plug.

### SPECIFICATIONS

**Exterior** – One-piece top flange and coved-corner interiors constructed of 18 gauge stainless steel. Exterior body constructed of heavy gauge, corrosion resistant steel. Condensing unit mounted on corrosion resistant frame below the cold pan.

**Interior** – CFC free foamed-in-place insulation through-out, 1" drain located in the center for easy cleaning and recessed ledge for pan support.

**Refrigeration** – Type 134A and type 404A CFC free refrigerant system featuring wrapped coil construction on both sides and bottom, individual thermostats, on/off switch, 8 ft. cord and plug set NEMA 5-15P (120V models). Refrigeration system features sight glass, easy service valves, dryer/filter and receiver. Condensing unit may be easily removed for service.

### STANDARD FEATURES

- Complies with NSF-2 requirements
- Self contained drop-in design
- Each well holds 4 each 3rd size pans or equivalent fractional sized pans
- 18 gauge stainless steel top and liner for maximum strength and durability
- 1" drains for ease of cleaning
- On-off switch with 8 ft cord & plug for ease of installation and operation
- Type 134A or 404A CFC free refrigerant
- Fully insulated, CFC free, foamed-in place insulation keeps food cold while saving energy
- Recessed ledge for pan support and colder, fresher products
- Quick & easy service with sight glass, service valves, filter/dryer and receiver
- Limited 1 year parts & labor warranty

### OPTIONS & ACCESSORIES

- 5-year compressor warranty
- Perforated bottom strainer plate conveniently holds ice above drain to prevent clogging
- Adaptor bars for fractional sized pans
- Remote on/off switch
- 220/230/240V
- 50 cycle
- Remote models (Includes compressor and condensing units and up to 20' leads)
- Remote models without compressors or condensing units
- Special condenser orientation and compressor rack position
- 2nd year parts & labor warranty

### CERTIFICATIONS



Sheet No. WELLRCP143-02/12



Wells Bloomfield • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.

Phone : (314) 678-6314 • Fax (314) 781-3636

www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.

**NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.**




Over 90 Years Of Quality Foodservice Products And Service


# Refrigerated Cold Pans Extra Capacity 4/3 Pans Models

- RCP-143 □ RCP-243 □ RCP-343
- RCP-443 □ RCP-543 □ RCP-643

INCHES  
MM

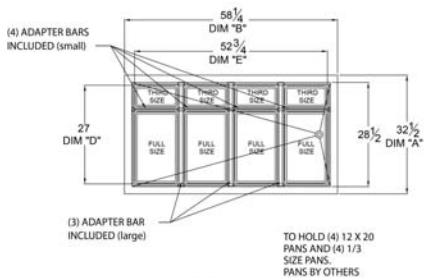

PLAN VIEW  
1/2" = 1'-0"




SECTION THRU  
SCALE: 1"=1"


**NOTE:**  
Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.

## RCP-443 Shown




COUNTER CUTOUT:  
56 3/4" (DIM "G") X 31" (DIM "F")

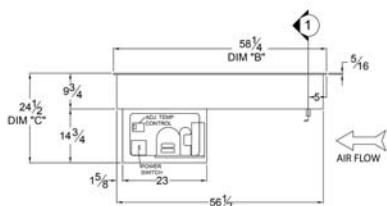

ELEVATION "A"  
1/2" = 1'-0"



SIDE ELEVATION  
1/2" = 1'-0"

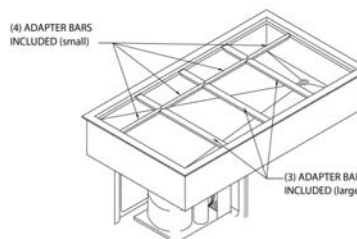

SPECIFICATIONS								SHIPPING INFORMATION							
Model Number	OVERALL DIMENSIONS			INTERIOR DIMENSIONS		CUT OUT DIMENSIONS		Model Number	WEIGHTS		CARTON DIMENSIONS			CRATE SIZE	
	A Front to Back Inches (MM)	B Left to Right Inches (MM)	C Height Inches (MM)	D Front to Back Inches (MM)	E Left to Right Inches (MM)	Width Front to Back Inches (MM)	Length Left to Right Inches (MM)		SHIPPING WEIGHT POUNDS (KG)	INSTALLED WEIGHT POUNDS (KG)	WIDTH Inches (MM)	DEPTH Inches (MM)	HEIGHT Inches (MM)	CUBIC FEET	CUBIC METERS
RCP-143	32-1/2 (825.5)	17-3/8 (442)	24-1/2 (623)	27 (686)	11-7/8 (302)	31 (788)	15-7/8 (404)	RCP-143	114 (52)	104 (47)	34-1/8 (867)	18-3/8 (467)	32 (813)	11.6	0.31
RCP-243	32-1/2 (825.5)	31 (788)	24-1/2 (623)	27 (686)	25-1/2 (648)	31 (788)	29-1/2 (750)	RCP-243	232 (105)	216 (98)	34-1/8 (867)	32 (813)	32 (813)	20.2	0.57
RCP-343	32-1/2 (825.5)	44-5/8 (1134)	24-1/2 (623)	27 (686)	39-1/8 (994)	31 (788)	43-1/8 (1096)	RCP-343	269 (122)	247 (112)	34-1/8 (867)	45-5/8 (1159)	32 (813)	28.8	0.81
RCP-443	32-1/2 (825.5)	58-1/4 (1480)	24-1/2 (623)	27 (686)	52-3/4 (1340)	31 (788)	56-3/4 (1442)	RCP-443	358 (162)	330 (150)	34-1/8 (867)	59-1/4 (1505)	32 (813)	37.4	1.06
RCP-543	32-1/2 (825.5)	71-7/8 (1826)	24-1/2 (623)	27 (686)	66-3/8 (1686)	31 (788)	70-3/8 (1788)	RCP-543	403 (183)	369 (167)	34-1/8 (867)	72-7/8 (1851)	32 (813)	46.1	1.30
RCP-643	32-1/2 (825.5)	85-1/2 (2172)	24-1/2 (623)	27 (686)	80 (2032)	31 (788)	84 (2134a)	RCP-643	440 (200)	400 (181)	34-1/8 (867)	86-1/2 (2197)	32 (813)	54.7	1.55

### POWER SUPPLY

Model Number	VOLTS	HP	AMPS	PHASE	POWER SUPPLY	Refrigerant
RCP-143	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
RCP-243	115	1/4	4.9	SINGLE	NEMA 5-15P	134A
RCP-343	115	1/3	5.6	SINGLE	NEMA 5-15P	404A
RCP-443	115	1/2	6.4	SINGLE	NEMA 5-15P	404A
RCP-543	115	3/4	7.2	SINGLE	NEMA 5-15P	404A
RCP-643	115	3/4	7.2	SINGLE	NEMA 5-15P	404A



5-15P

Due to periodic changes in designs, methods, procedures, policies and regulations, the specifications contained in this sheet are subject to change without notice. While Wells exercises good faith efforts to provide information that is accurate, we are not responsible for errors or omissions in information provided or conclusions reached as a result of using the specifications. By using the information provided, the user assumes all risks in connection with such use.



**Wells Bloomfield** • 10 Sunnen Dr. St. Louis, MO 63143 U.S.A.  
Phone : (314) 678-6314 • Fax (314) 781-3636  
www.wellsbloomfield.com © 2012 Wells Bloomfield • Printed in the U.S.A.

**NOTE: Specifications are subject to change without notice and are not intended for installation purposes. See installation instructions prior to installing the unit.**