

FULL JACKET ELECTRIC STEAM PEDESTAL KETTLE



- EP-20F
- EP-30F
- EP-40F
- EP-60F

OPERATION SHALL BE BY:

Electrically, self-generating closed steam system equipped for operation on:

- 208 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 208 VAC, 3 phase, 50/60 Hz
- 220 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 220 VAC, 3 phase, 50/60 Hz
- 240 VAC, 1 phase, 50/60 Hz (12 to 18 kW only)
- 240 VAC, 3 phase, 50/60 Hz
- 380/220 VAC, 3 phase, 50/60 Hz 4 wire
- 415/240 VAC, 3 phase, 50/60 Hz 4 wire

OPTIONS & ACCESSORIES AT ADDITIONAL COST

- | | | |
|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|--------------------------------------------------------------|
| <input type="checkbox"/> 3" (76 mm) draw-off valve (TVS-3) with perforated strainer (TPS-) | <input type="checkbox"/> Etched gallon markings (GM-) | <input type="checkbox"/> Graduated measuring strip (CMS-) |
| <input type="checkbox"/> 24 kw on 40, 60, 80 gallon | <input type="checkbox"/> Etched litre markings(LM-) | <input type="checkbox"/> Strainer hook (SH) |
| <input type="checkbox"/> 33 kw on 60, 80, 100 gallon | <input type="checkbox"/> Correctional package | <input type="checkbox"/> Draw-off valve hose kit (DVHK-) |
| <input type="checkbox"/> 380 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Solid state thermostat (SST-E) | <input type="checkbox"/> Calibrated thermostat dial "F" |
| <input type="checkbox"/> 415 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Single pantry faucet with swing spout (SF-12) | <input type="checkbox"/> Calibrated thermostat dial "C" |
| <input type="checkbox"/> 480 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> Double pantry faucet with swing spout (DF-12) | <input type="checkbox"/> Single pantry kettle filler (SP-KF) |
| <input type="checkbox"/> 600 VAC, 3 Phase, 50/60 Hz | <input type="checkbox"/> One piece lift off cover (C-) | <input type="checkbox"/> Double pantry kettle filler (DP-KF) |
| <input type="checkbox"/> Two piece hinged stainless steel cover (2PHC-) | <input type="checkbox"/> Triple basket assembly (TBA-) | <input type="checkbox"/> Kettle heat shield (KHS-) |
| | <input type="checkbox"/> Solid stainless steel disc for draw-off valve (TSS-) | |

STANDARD CONSTRUCTION SPECIFICATIONS

Shall be a Crown Model EP-20F, EP-30F, EP-40F, EP-60F, self-generating, electric, full jacket, low height pedestal kettle.

A double wall kettle interior shall form a steam jacket around the full kettle.

The jacket enclosure shall contain distilled water which is factory sealed.

The bottom of the kettle shall be of hemispherical design for superior heat circulation.

The pedestal base shall have four, 7/16" holes evenly spaced for securing unit to the floor.

Construction shall be all welded #4 finish stainless steel, type 304.

The interior liner shall be standard with 316 stainless steel for high acid content cooking.

The controls shall be integrally mounted and shall include a power switch, thermostat, pilot light, low water light, vacuum/pressure gauge, safety relief valve, and low water shut off.

Faucet bracket standard.

The kettle shall be standard with removable elements.

Convenience features shall include a 2" (50 mm) draw-off valve and a spring assist hinged stainless steel domed cover.

The kettle shall be ASME Code stamped, National Board Registered, c-CSA-us and NSF certified.


The kettle shall operate in a temperature range of 165°F to 285°F (74°C to 140°C) at a maximum pressure of 50 psi (345 kPa).



Approval Notes: _____

Models: EP-20F EP-30F EP-40F EP-60F

EP-F

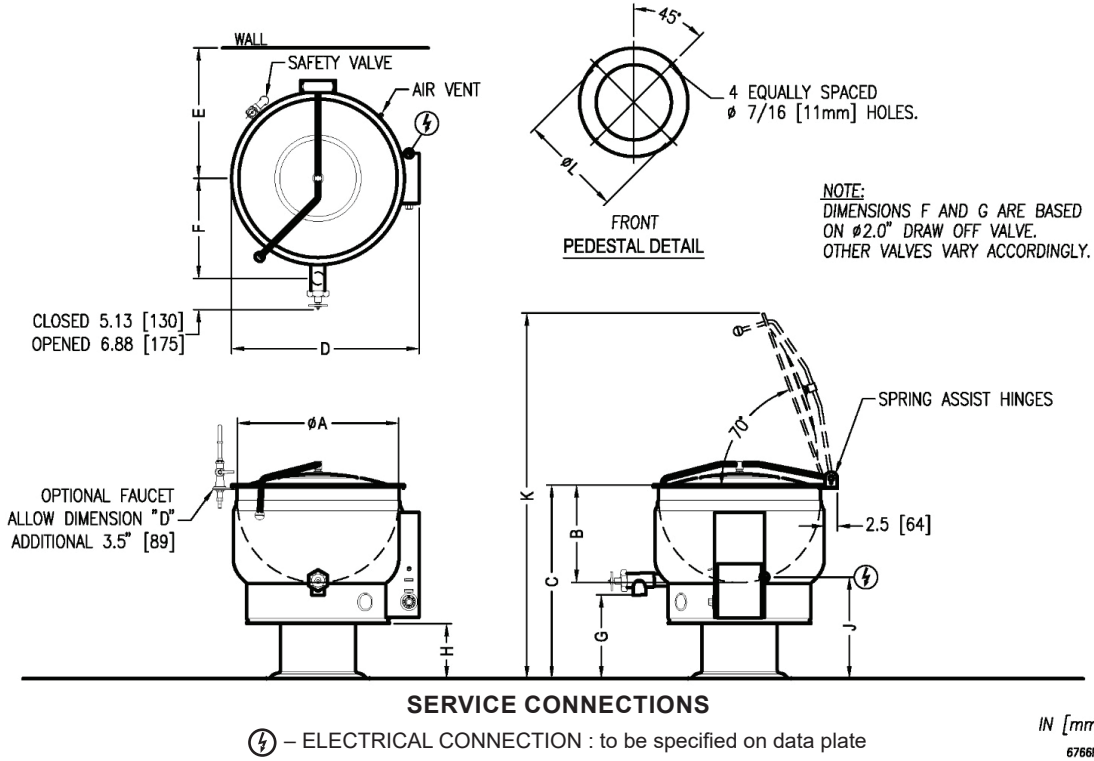

DIMENSIONS

MODEL	CAPACITY	UNITS	A	B	C	D	E	F(2")	F(3")	G(2")	G(3")	H	J	K
EP-20	20 gallons (76 liters)	in (mm)	21" (533)	18" (457)	38" (965)	25.25" (641)	18.5" (470)	14.75" (375)	15.5" (394)	18" (457)	17.13" (435)	13.38" (340)	20.75" (527)	60.5" (1537)
EP-25	25 gallons (95 liters)	in (mm)	21" (533)	21.25" (540)	37.25" (946)	25.25" (641)	18.5" (470)	14.75" (375)	15.5" (394)	14.12" (358)	13.13" (333)	9.5" (241)	17" (432)	58.75" (1492)
EP-30	30 gallons (114 liters)	in (mm)	24" (610)	20" (508)	38" (965)	28.25" (718)	20" (508)	16" (406)	16.5" (419)	15.75" (400)	15" (381)	11.25" (286)	18.88" (479)	63.5" (1613)
EP-40	40 gallons (152 liters)	in (mm)	26" (660)	22.5" (572)	38" (965)	30.25" (768)	21" (533)	17" (432)	18" (457)	13.5" (343)	13.5" (343)	8.88" (225)	16.38" (416)	65" (1651)
EP-60	60 gallons (227 liters)	in (mm)	29.5" (749)	26" (660)	42" (1067)	33.75" (857)	20.63" (524)	18" (457)	19.25" (489)	13.88" (352)	12.88" (327)	9.63" (244)	17.13" (435)	75" (1905)
EP-80	80 gallons (303 liters)	in (mm)	33" (838)	28" (711)	45" (1143)	37" (940)	22.38" (568)	19.5" (495)	20.5" (521)	14.88" (378)	13.88" (352)	11.25" (286)	18.63" (473)	81" (2058)
EP-100	100 gallons (379 liters)	in (mm)	35.5" (902)	30" (762)	48" (1219)	40" (1016)	23.63" (600)	21.5" (546)	22.5" (572)	15" (381)	14.5" (368)	13" (330)	20.5" (521)	87" (2210)

ELECTRICAL CHARACTERISTIC

AVAILABLE KW			AMPS PER LINE								
MODEL	STANDARD	OPTIONAL	kW	PHASE	208V	220V	240V	380V	415V	480V	600V
EP-20F	18	24	18	1	86.5	81.8	75.0	N/A	N/A	N/A	N/A
EP-30F	18	24 or 33		3	50	47.2	43.3	27.3	25	21.6	17.3
EP-40F	18	24 or 33	24	3	66.6	62.9	57.7	36.4	33.3	28.8	23.1
EP-60F	24	33		3	91.6	86.6	79.4	50.1	45.9	39.7	31.7

SPECIFICATIONS

MODEL	kW	CAPACITY		MODEL	SHIPPING WEIGHT	MINIMUM CLEARANCE	
EP-20F	18	20 Gallon	76 Liter	EP-20F	245 lbs. [111 kg]	SIDES BACK	3" [76 mm] 3" [76 mm]
EP-30F	18	30 Gallon	114 Liter	EP-30F	375 lbs. [170 kg]		
EP-40F	18	40 Gallon	152 Liter	EP-40F	420 lbs. [191 kg]		
EP-60F	24	60 Gallon	227 Liter	EP-60F	460 lbs. [209 kg]		

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

