



# GAS CABINET BASE HYDRAULIC TILTING SKILLET

Job \_\_\_\_\_  
Item# \_\_\_\_\_



| MODEL   | CAPACITY |        |       |
|---------|----------|--------|-------|
|         | BTU      | GALLON | LITER |
| GMTS-60 | 100,000  | 60     | 226   |

### SPECIFICATIONS:

Shall be a Crown model **GMTS-60** gas fired hydraulic tilting skillet, AGA/CGA and NSF certified. The unit shall have a spring assisted hinged stainless steel cover, complete with handle and a no drip condensate guide. The pan body shall have a sloped front, be front hinged for tilting and easy pour control, comes complete with removable pour lip strainer, and with etched gallon markings. The pan is formed from 10 gauge stainless steel with a #4 finish exterior and polished interior with coved corners for easy cleaning. Cooking surface shall be 3/4" triple-ply construction with 3/8" thick aluminum core ensuring even heat distribution over entire cooking surface. The pan shall be mounted on a heavy duty welded angle constructed frame fitted with 6" (152 mm) stainless steel legs with 4 adjustable flanged for securing to the floor. Enclosed with #4 finish type 304 stainless steel with removable side panels and two stainless steel front cabinet doors.

All controls are mounted in the cabinet base which include a solid state thermostat, temperature light, tilt switch, electronic ignition, tilt safety switch and hydraulic lift system powered by a 1/2 HP electric motor for smooth and precise tilting action. The high limit thermostat is located on the pan bottom. Cooking temperatures are between 100°F and 450°F (38°C and 232°C). Gas supply to the burners automatically shuts off when the pan is tilted.

### OPERATION SHALL BE BY:

- Natural Gas
- Propane Gas

Gas fired skillet operating on 115 VAC, 1 Phase, 60Hz

### OPTIONAL ITEMS AT EXTRA COST:

- 220 VAC, 1 phase, 50 Hz
- Etched liter markings (LMS-226)
- 2" draw off valve with strainer, front or side mounted (TVT-2BP)
- 3" draw off valve with strainer, side mounted (TVT-3BP)
- Correctional Package


### ACCESSORIES:

- Pan carrier (PC-1)
- Steam pan insert (SPI-60)
- 12" Single pantry faucet with swing spout (SF-12 EX)
- 12" Double pantry faucet with swing spout (DF-12 EX)
- 3" Stainless steel faucet plumbing enclosure (SPE-1)
- Single pantry faucet & bracket with 68" pot filler (SP-RSH)
- Double pantry faucet & bracket with 68" pot filler (DP-RSH)



Models:  GMTS-60

| MODEL   | SHIPPING WEIGHT      | MINIMUM CLEARANCE * |                             |
|---------|----------------------|---------------------|-----------------------------|
| GMTS-60 | 925 lbs.<br>[420 kg] | Side<br>Back        | 3" [ 76 mm ]<br>6" [152 mm] |

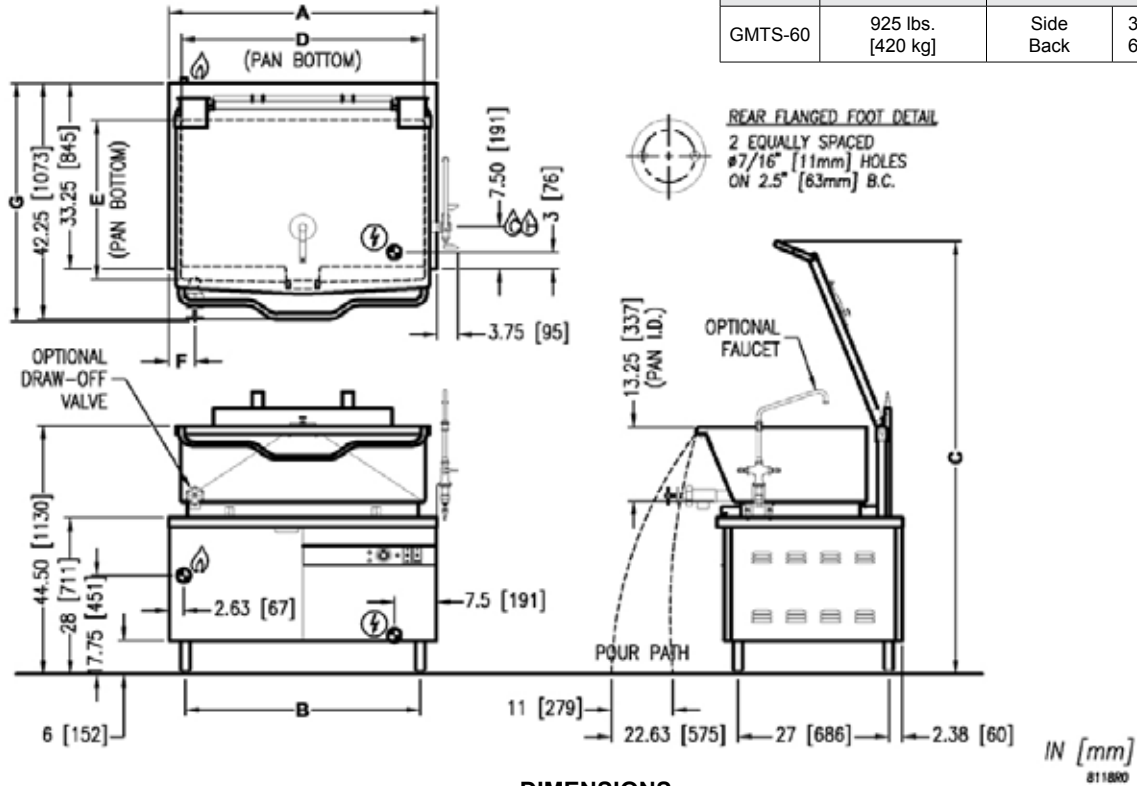

**DIMENSIONS**

| MODEL   | CAPACITY                   | A                | B                | C                   | D                   | E               | F                 | G                         |                          |
|---------|----------------------------|------------------|------------------|---------------------|---------------------|-----------------|-------------------|---------------------------|--------------------------|
| GMTS-60 | 60 Gallons<br>(227 liters) | 48"<br>(1219 mm) | 42"<br>(1067 mm) | 77.50"<br>(1969 mm) | 42.88"<br>(1089 mm) | 23"<br>(584 mm) | 4.75"<br>(121 mm) | Ø2<br>42.63"<br>(1083 mm) | Ø3<br>46.5"<br>(1181 mm) |

| MODEL   | GAS SUPPLY |       |   |
|---------|------------|-------|---|
|         | BTU/HR     | kw/HR | Supply Pipe Pressure (W.C)  |
| GMTS-60 | 100,000    | 29.3  | Natural<br>6" - 14"<br>(152 mm - 356 mm)      Propane<br>11" - 14"<br>(279 mm - 356 mm) |

\* For use on noncombustible floors only.

**SERVICE CONNECTIONS**

- ⚡ \_ ELECTRICAL CONNECTIONS: Unless otherwise specified, Field Wire Electrical Connection to be 120 Volts, 60 Hz, single phase with grounding wire. 10 Amp minimum supply.
- 🔥 - GAS CONNECTION: 3/4" IPS. A gas shut-off valve is installed in supply piping.
- Ⓒ - COLD WATER: 3/8" O.D. tubing to faucet (OPTIONAL)
- 🔥 - HOT WATER: 3/8" O.D. tubing to optional faucet (OPTIONAL)

**INTENDED FOR COMMERCIAL USE ONLY.  
NOT FOR HOUSEHOLD USE.**



70 Oakdale Road, Toronto ON, Canada M3N 1V9  
(919) 762-1000 www.crownsteamgroup.com