



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company
215 Federal Avenue
Belleville, WI 53508-9201
Phone: 800-356-4206
Fax: 608-424-3234
Email: geninfo@federalind.com
Website: www.federalind.com

Project Name: _____

Item #: _____

Model #: _____ Qty: _____

Approval: _____

AIA#

SIS#

ELEMENTS COUNTERTOP HOT SERVE AND SELF-SERVE MERCHANDISERS


HOT SERVICE

MODEL	LENGTH (Includes End Panels)
<input type="checkbox"/> EH-2428	24 x 29.7 x 25.1 (in) 610 x 754 x 638 (mm)
<input type="checkbox"/> EH-3628	35 x 29.7 x 25.1 (in) 889 x 754 x 638 (mm)
<input type="checkbox"/> EH-4828	47 x 29.7 x 25.1 (in) 1194 x 754 x 638 (mm)

HOT SELF-SERVE

MODEL	LENGTH (Includes End Panels)
<input type="checkbox"/> EH-2428SS	24 x 29.7 x 25.1 (in) 610 x 754 x 638 (mm)
<input type="checkbox"/> EH-3628SS	35 x 29.7 x 25.1 (in) 889 x 754 x 638 (mm)
<input type="checkbox"/> EH-4828SS	47 x 29.7 x 25.1 (in) 1194 x 754 x 638 (mm)

The Elements™ counter top merchandiser provides value without sacrificing performance. Cases are available in lengths of 2', 3', and 4'.



STANDARD FEATURES

Model Features

- Stainless steel heated shelves, two tiers. Shelves are adjustable up and down and can also be tilted in two positions.
- Tempered front and glass ends.
- Stainless steel display deck.
- Easily accessible light switch and variable heat control.
- Cord and plug (NEMA 5-15P).
- Self-serve models with lift-up front doors.

Shelving

- Removable sliding rear doors, shelf supports, and shelves.

Lighting

- 3500K LED top and individual shelf lights. Lights are independently wired.
- DLC Certified, IP66 rated.

Agency Approvals

- UL Safety and UL Sanitation Listed.



WARRANTY*
One year Parts and Labor
2nd thru 5th year part
only service compressor
(U.S.A and Canada)

Note: Information is subject to change at any time.
Visit www.federalind.com for the most current specs.

Revised 04/01/2019

AIA#


ELEMENTS COUNTERTOP HOT SERVE AND SELF-SERVE MERCHANDISERS

SIS#

Product Specifications

DIMENSION: xx"/(mm)

DIMENSION TOLERANCE +/- 0.19 (4.8)

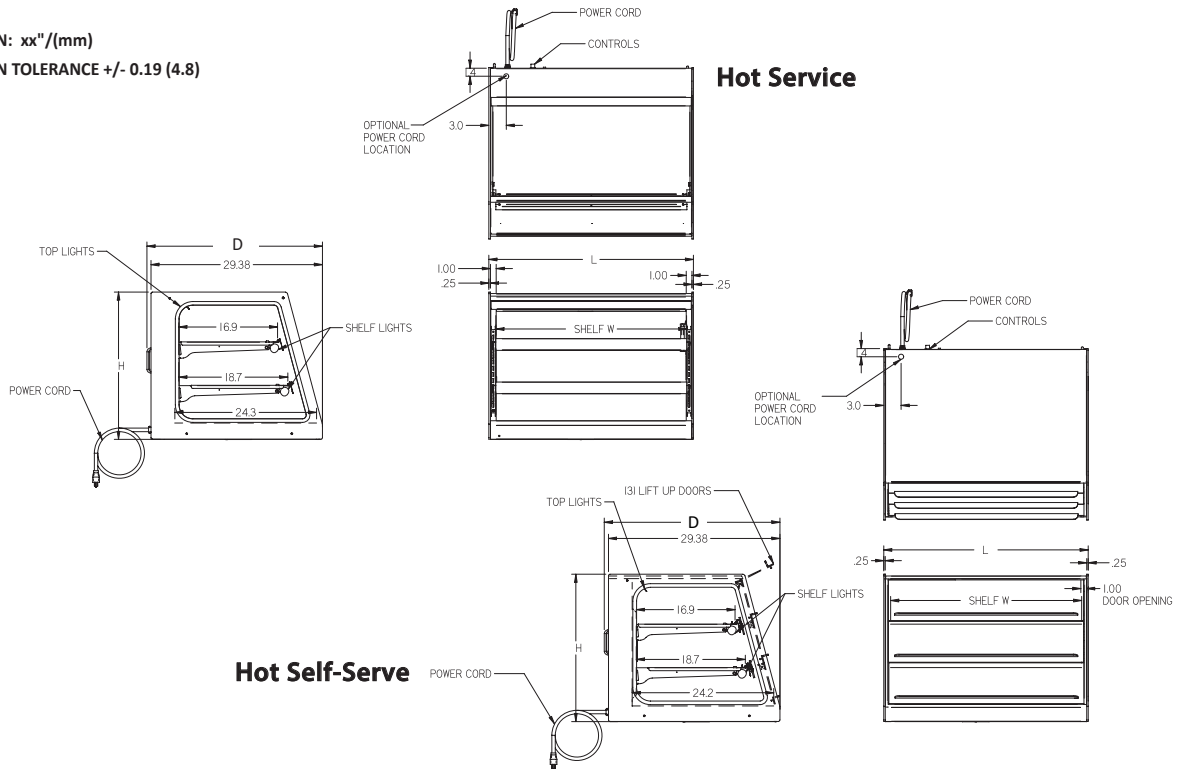

MODEL	DIMENSIONS				SHIPPING WHT		ELECTRICAL 120/60/1	
	L	D	H	UNITS	LBS	KILO	AMPS	WATTS
HOT SERVICE							AMPS	WATTS
EH-2428	24	29.7	25.1	in.	290	132	7.2 AMPS	860
	610	754	638	mm.				
EH-3628	35	29.7	25.1	in.	333	151	8.5 AMPS	1000
	889	754	638	mm.				
EH-4828	47	29.7	25.1	in.	375	170	11.0 AMPS	1330
	1194	754	638	mm.				
HOT SELF-SERVE							AMPS	WATTS
EH-2428SS	24	29.7	25.1	in.	290	132	7.2 AMPS	860
	610	754	638	mm.				
EH-3628SS	35	29.7	25.1	in.	333	151	10 AMPS	1120
	889	754	638	mm.				
EH-4828SS	47	29.7	25.1	in.	375	170	12.5 AMPS	1450
	1194	754	638	mm.				

- If a GFCI circuit is required, a GFCI Breaker Must be used instead of GFCI receptacle.
- Due to continuing engineering improvements, specifications are subject to change without notice.



The Signature of Quality

FEDERAL INDUSTRIES

A Standex Company

215 Federal Avenue, Belleville, WI 53508-9201

PHONE: 800-356-4206

E-MAIL: geninfo@federalind.com

FAX: 608-424-3234

WEBSITE: www.federalind.com