

STEAM-IT ELECTRIC PRESSURE COOKER



Shown on optional stand with extra shelf

ST-E (Three pan electric pressure cooker)

Standard Features

Cooking compartment shall have a capacity of (3):

- (3) 12" x 20" x 2 1/2" pans (65mm)
- (2) 12" x 20" x 4" pans (10cm)

Shipping Weight

- 125 lbs (57 kg)

OPTIONS & ACCESSORIES AT ADDITIONAL COST

Pans & Covers

- 12" x 20" pan cover
- 12" x 20" x 1" solid pan
- 12" x 20" x 1" perforated pan
- 12" x 20" x 2-1/2" solid pan
- 12" x 20" x 2-1/2" perforated pan
- 12" x 20" x 4" solid pan
- 12" x 20" x 4" perforated pan
- 12" x 20" x 6" solid pan
- 12" x 20" x 6" perforated pan

Stands

- 28" tall stainless steel stand
- Extra shelf for 28" tall stand
- 6" Flanged Feet
- Cold water condensing kit
- Spray hose

STANDARD CONSTRUCTION SPECIFICATIONS

The Market Forge Steam-it model ST-E Electrically Operated Pressure Cooker.

Steam-It shall have a 3/16" (5mm) aluminum welded seamless cooking compartment.

Exterior finish shall be stainless steel.

Door shall be self-sealing inside type which can't be opened under pressure.

Door is 12 gauge stainless steel, removable for cleaning without tools.

Door gasket is a one piece mold, replaceable without tools or cement.

Unit shall include set of (4) stainless steel adjustable feet.

Cooking compartment has a capacity of (3) 12" x 20" x 2-1/2" or (2) 12" x 20" x 4" pans.

Removable pan supports are included.



Cooking cycle is controlled by an automatic timer that will shut off and exhaust steam and condensate at end of cooking cycle.

Unit includes 0-60 minute timer, a safety valve, steam pressure gauge, and will be completely serviceable from the front.



Approval Notes: _____

DIMENSIONS ARE IN INCHES [MM]

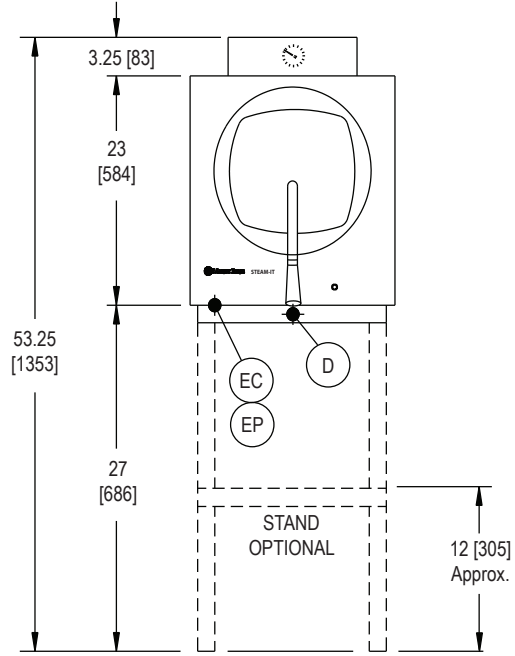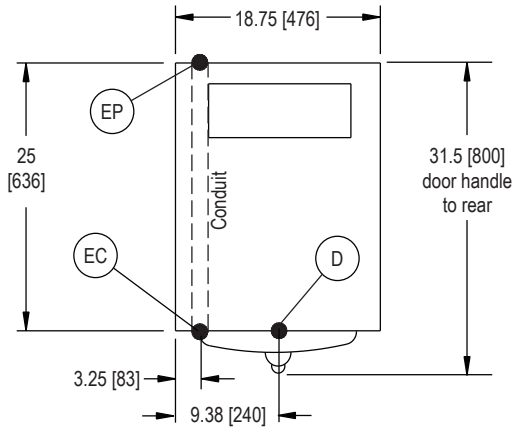

SERVICE CONNECTIONS

SYMBOL	DESCRIPTION
EC	Electrical Connection - Connection for incoming power supply wires on terminal block
EP	Power Supply - 1-1/4" threaded access hole for power supply wires. Use wire suitable for at least 90°C. Nominal amps per line.
D	Drain - 1/2" 13mm O.D. tubing. Air break required for drain connection supplied by others

The manufacturer reserves the right to modify materials and specifications without notice.

ELECTRICAL CHARACTERISTICS

Volts	Phase	AMPS		
		9kW	12kW	12.5kW
208	1	43	-	-
	3	25	-	-
240	1	-	50	-
	3	-	29	-
440	3	-	16	-
480	3	-	-	16

Details of other electrical systems available upon request.

WATER SUPPLY AND DRAIN SPECIFICATIONS

Good quality water feed is the responsibility of the owner. Water quality must be within the following general guidelines.

TDS: 40-125 ppm Hardness: 35-100 ppm pH: 7.0 - 8.5 Silica: <13 ppm Chlorides: <25 ppm Chlorine: <0.2 ppm Chloramine: <0.2 ppm

The best defense against poor water quality is a water treatment system designed to meet your water quality conditions.

Appliance to be installed with backflow protection according to federal, state or local codes.

DISCLAIMER

Terry System Cartridge Changes / Installation – "2-3 gallons of water **MUST** be purged at each cartridge change or new installation prior to water supply being fed to the steamer. Failure to do so can result in component damage within the steamer which is not covered under warranty. For additional guidance on proper installation, refer to install documentation provided with each Terry System and Replacement Cartridge Set."

**INTENDED FOR COMMERCIAL USE ONLY.
NOT FOR HOUSEHOLD USE.**

