



Female Adapter

SAF

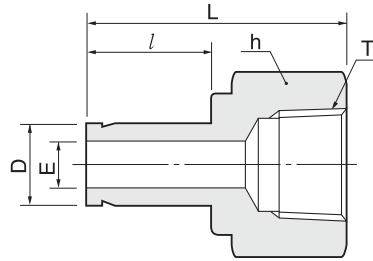

Connects fractional S-LOK port to male NPT thread

Part No.	Tube O.D.		T (NPT)	E Min.	Width across flat		l	L
	D				h			
	in	mm			in	mm		
SAF -2-2N	1/8	3.17	1/8	2.03	9/16	14.28	13.45	31.50
SAF -2-4N	1/8	3.17	1/4	2.03	3/4	19.05	13.45	35.30
SAF -3-2N	3/16	4.76	1/8	3.04	9/16	14.28	14.20	32.00
SAF -3-4N	3/16	4.76	1/4	3.04	3/4	19.05	14.20	35.81
SAF -4-2N	1/4	6.35	1/8	4.31	9/16	14.28	15.75	33.02
SAF -4-4N	1/4	6.35	1/4	4.31	3/4	19.05	15.75	37.10
SAF -4-6N	1/4	6.35	3/8	4.31	7/8	22.22	15.75	39.37
SAF -4-8N	1/4	6.35	1/2	4.31	1-1/16	26.98	15.75	45.50
SAF -5-2N	5/16	7.93	1/8	5.58	9/16	14.28	16.80	34.29
SAF -5-4N	5/16	7.93	1/4	5.58	3/4	19.05	16.80	37.59
SAF -6-2N	3/8	9.52	1/8	6.86	9/16	14.28	17.50	34.29
SAF -6-4N	3/8	9.52	1/4	6.86	3/4	19.05	17.50	38.10
SAF -6-6N	3/8	9.52	3/8	6.86	7/8	22.22	17.50	40.38
SAF -6-8N	3/8	9.52	1/2	6.86	1-1/16	26.98	17.50	46.73
SAF -8-4N	1/2	12.70	1/4	9.4	3/4	19.05	23.20	43.43
SAF -8-6N	1/2	12.70	3/8	9.4	7/8	22.22	23.20	45.46
SAF -8-8N	1/2	12.70	1/2	9.4	1-1/16	26.98	23.20	51.80
SAF -10-6N	5/8	15.87	3/8	11.9	7/8	22.22	24.70	48.26
SAF -10-8N	5/8	15.87	1/2	11.9	1-1/16	26.98	24.70	53.84
SAF -10-12N	5/8	15.87	3/4	11.9	1-5/16	33.33	24.70	55.37
SAF -12-8N	3/4	19.05	1/2	14.73	1-1/16	26.98	24.70	52.83
SAF -12-12N	3/4	19.05	3/4	14.73	1-5/16	33.33	24.70	54.86
SAF -12-16N	3/4	19.05	1	14.73	1-5/8	41.27	24.70	58.42
SAF -14-12N	7/8	22.22	3/4	17.27	1-5/16	33.33	26.70	57.15
SAF -16-12N	1	25.40	3/4	20.32	1-5/16	33.33	31.70	60.70
SAF -16-16N	1	25.40	1	20.32	1-5/8	41.27	31.70	64.26
SAF -20-20N	1-1/4	31.75	1-1/4	25.9	2-1/8	53.98	40.00	77.72
SAF -24-24N	1-1/2	38.10	1-1/2	31.75	2-3/8	60.33	51.50	88.90
SAF -32-32N	2	50.80	2	43.68	2-7/8	73.03	68.40	107.44