



TG SERIES

# COMPACT TRACTORS

36 - 60 HP



ISEKI GIVES YOU THE EDGE



# JAPANESE BUILT QUALITY TRACTORS

Iseki's TG Series sets the benchmark for compact tractor performance. Designed and manufactured in Japan, the TG Series is built to exceptional standards of quality – starting from the front lights through to the back three-point linkage.

Every component, including the engine and transmission, features Iseki's stamp of approval for quality and excellence that is rarely seen in the compact tractor category.

With a host of options and features to choose from, the Iseki TG Series provides unrivalled reliability to get the job done fast, efficiently and in comfort. It's how Iseki gives you the edge.



## POWERFUL ENGINES

Powered by Iseki 3 and 4 cylinder engines, the TG Series offers more power when you need it. With peak torque developed at low engine speeds, it makes easy work of tough conditions.

Access to regular service points and critical components is made easy thanks to the clever design of the engine and bonnet.



### EFFICIENT POWER

- Maximum power achieved at lower RPM
- Reduced noise levels
- Genuine Iseki engine made in Japan



### ENGINE SERVICEABILITY

- Easy access to regular service points for easy maintenance and consistent performance
- A built in fuel filler means you don't have to raise the bonnet to fill up
- A removable screen protects the radiator from debris and is easy to clean
- The air cleaner is easily accessed and cleaned, located at the front of the tractor

## TRANSMISSIONS FOR EVERY JOB

Iseki's TG Series transmissions offer the flexibility and performance required for today's ever increasing workloads.

With a choice of heavy-duty Power Shuttle and Hydrostatic transmissions, the TG Series makes it easy with smooth, effortless directional changes and a greater speed range for your desired application.



### HYDROSTATIC TRANSMISSION

- Three-range hydrostatic transmission available in 39 and 47 HP models
- Standard with 4 wheel-drive and differential lock for exceptional traction in all conditions
- Single pedal forward/reverse feature
- Directional changes are made via the feather touch shuttle lever



### 12 X 12 SPEED POWER SHUTTLE TRANSMISSIONS

- 12 x 12 speed, heavy duty Forward and Reverse Power Shuttle Transmission
- Quick directional changes without clutching
- Available in 36, 47 and 60 HP models
- Wet disc brakes – large oil immersed multi-disc brakes means longer lasting, as well as accurate and precise stopping



### CRUISE CONTROL

- Electronically controlled cruise control
- Uninterrupted speed adjustment
- Memory select speed setting

## OPERATOR COMFORT

FORWARD/REVERSE POWER SHUTTLE

LARGE ISO MOUNTED FLAT PLATFORM  
FULL RUBBER-PADDED FLOOR MAT

4 SPEED GEAR/SHIFT LEVER

PARKING BRAKE LEVER

3 RANGE SELECTION LEVER

4WD LEVER

DELUXE MECHANICAL  
SUSPENSION OPERATOR'S SEAT

LARGE INSTRUMENT PANEL

HAND THROTTLE LEVER

BRAKE PEDAL

JOYSTICK CONTROL OF  
AUXILIARY HYDRAULICS

THREE POINT LINKAGE  
POSITION CONTROL LEVER

ELECTRO HYDRAULIC PTO  
ENGAGEMENT SWITCH

REAR AUXILIARY  
HYDRAULIC LEVERS

## LUXURY CAB

All-work versatility. All-weather capability. That's what you get with Iseki's compact cabin tractors. The spacious and cleverly designed cabin allows you to put in a hard day's work, day after day.

Nothing says luxury, all weather convenience and quiet operation quite like Iseki cabins.

The deluxe design offers standard dual side entry, outstanding visibility and exceptional comfort that will keep you working at optimum performance for longer.



### SPACIOUS CABIN

- The glass enclosed cabin has been designed with generous head and leg room
- Featuring large doors on both sides for convenient entry and exit with hand grips on the door frames for easy access to the cab
- Provides a comfortable work environment in all weather conditions



### TEMPERATURE CONTROL

- Heating and air-conditioning controls are located within easy reach in the cab headline
- Two vents in the front of the cab, two in the centre, two on the sides



### 360° VIEWS

- The wide front window on the cab offers excellent visibility, as do rear and corner windows – all of which can be opened
- A clear line of sight from the operator's seat to the rear of the tractor allows you to see the implement working
- Standard front and rear windshield wiper and washers help to keep you working in all weather conditions






## EXCEPTIONAL VERSATILITY

When it comes to an all-round performer, you can't go past Iseki. Whether it's on the farm, around municipalities or for grounds-care tasks, the TG Series leads the field with versatility. Front-end loader work is made easy with precise control to lift, lower, float and dump.

Pre-plumbed hydraulic valves allow hydraulic flow up to 47.7L/min meaning you can lift more and work faster.

### FRONT-END LOADER

- The TG Series can also be easily equipped with hydraulically operated front-end loaders
- The factory fitted joystick gives the operator precise control of the loader
- Featuring an open centre hydraulic system with up to 47.7L/min, allowing you to lift more and work faster

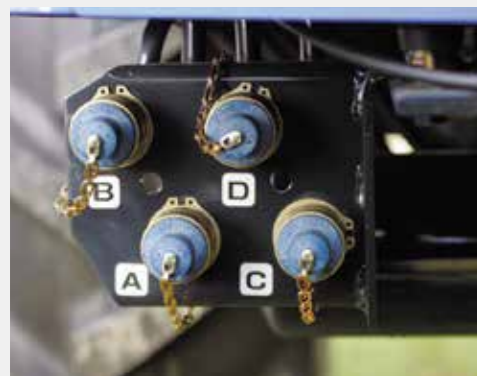

### HYDRAULIC VALVES AND JOYSTICK

- Standard with two front hydraulic remote valves and joystick lever
- Pre-plumbed for easy attachment of front end loaders
- Lever controls for rear auxiliary hydraulics
- Two rear remotes fitted as standard



## BUILT TOUGH

When the going gets tough, it's time to turn to Iseki. Heavy duty axles on the TG Series handle the heaviest of loads, making front-end-loader work a breeze, while the reinforced chassis accepts a wide range of multi-purpose accessories. The three-point linkage provides huge lift capacity and allows for quick and easy fitting of implements.



### THREE POINT LINKAGE

- Huge three point linkage lift capacity up to 1,700kg
- Cat 1 (and Cat 2 on TG5570) linkage with position and draft control
- Designed for easy access and implement attachment with adjustable telescopic stabilisers and crank-type lift rod
- Large 47.7L/min hydraulic pump capacity with open centre hydraulic system on all models
- Electro-hydraulic PTO can be engaged by flicking a switch, without having to depress the clutch



### HEAVY DUTY AXLES

- Robust front and rear axle capacities to handle the toughest of jobs
- Reinforced chassis to accept a wider range of multi-purpose accessories
- Ideal for front-end loader applications
- Choose your desired footprint with a range of wheel and tyre options
- Tight turning circle to give exceptional manoeuvrability in tight spaces

MODEL			TG6370P.4R ROPS	TG6400H.4R ROPS	TG6400H.4C CAB	TG6490H.4C CAB	TG6490P.4R ROPS	TG6490P.4C CAB	TG5570 ROPS	TG5570 CAB	
Output	Rated (Gross)	kW (HP)	26.6 (35.7)	28.7 (38.5)	28.7 (38.5)	35.1 (47.1)	35.1 (47.1)	35.1 (47.1)	44.1 (60.0)	44.1 (60.0)	
Engine			Iseki E3CG	Iseki E3CDT	Iseki E3CDT	Iseki E4CG	Iseki E4CG	Iseki E4CG	Iseki E4DE	Iseki E4DE	
Number of Cylinders			3	3	3	4	4	4	4	4	
Displacement – litres			1.647	1.498	1.498	2.197	2.197	2.197	2.995	2.995	
Fuel Tank – litres			40	40	40	53	53	53	50	50	
Clutch Type			Pwr Shuttle	N/A	N/A	N/A	Pwr Shuttle	Pwr Shuttle	Pwr Shuttle	Pwr Shuttle	
Shuttle			STD	STD	STD	STD	STD	STD	STD	STD	
Transmission	Main		4	Servo HST	Servo HST	Servo HST	4	4	4	4	
	Sub		3	3	3	3 x 2 (Hi-Lo)	3	3	3	3	
Gear Speeds			F12/R12	3	3	3X2	F12/R12	F12/R12	F12/R12	F12/R12	
Clutch Type			Independent	Independent	Independent	Independent	Independent	Independent	Independent	Independent	
Rear PTO			540	540	540	540	540	540	540	540	
Diff-lock			STD	STD	STD	STD	STD	STD	STD	STD	
Brake system			Wet disc	Wet disc	Wet disc	Wet disc	Wet disc	Wet disc	Wet disc	Wet disc	
Parking brake			Lever Type	Lever Type	Lever Type	Lever Type	Lever Type	Lever Type	Lever Type	Lever Type	
Tread Pattern			Turf	Turf	Turf	Turf	Turf	Turf	Turf	Turf	
			Ag	Ag	Ag	Ag	Ag	Ag	Ag	Ag	
			Industrial	Industrial	Industrial	Industrial	Industrial	Industrial	Industrial	Industrial	
Drive Type			4WD	4WD	4WD	4WD	4WD	4WD	4WD	4WD	
Steering System			Power steering	Power steering	Power steering	Power steering	Power steering	Power steering	Power steering	Power steering	
Tilt steering			STD	STD	STD	STD	STD	STD	STD	STD	
Lift Capacity	at link end (kg)		1,270	1,270	1,270	1,580	1,580	1,580	1,700	1,700	
	at 24" behind (kg)		1,150	1,150	1,150	1,400	1,400	1,400	1,500	1,500	
Pump Capacity	litres/min		47.7	47.7	47.7	47.7	47.7	47.7	48.6	48.6	
Position control			STD	STD	STD	STD	STD	STD	STD	STD	
Joy-stick			STD	STD	STD	STD	STD	STD	STD	STD	
Hydraulic Outlet Valves @ Rear: STD (Max)			2 (2)	2 (2)	2 (2)	2 (2)	2 (2)	2 (2)	2 (2)	2 (2)	
Category			I	I	I	I	I	I	I/II	I/II	
Lift Rod Adjustment (RHS)			Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Bevel	Bevel	
Check Chain			Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	Turnbuckle	
Lower Linkage end			Hook end	Hook end	Hook end	Hook end	Hook end	Hook end	Ball end	Ball end	
Clevis			STD	STD	STD	STD	STD	STD			
ELECTRICAL											
Battery			12V 55Ah 582A	12V 55Ah 582A	12V 55Ah 582A	12V 72Ah 600A	12V 72Ah 600A	12V 72Ah 600A	12V 710 CCA	12V 710 CCA	
Digital panel			STD	STD	STD	STD	STD	STD	N/A	N/A	
DIMENSIONS											
Overall Length (mm)			3,070	3,070	3,070	3,370	3,370	3,370	3,420	3,420	
Overall Width (mm)			1,545	1,545	1,545	1,810	1,810	1,810	1,680	1,680	
Overall Height (mm)			2,500	2,570	2,275	2,325	2,300	2,325	2,330	2,330	
Wheel Base (mm)			1,770	1,770	1,770	1,900	1,900	1,900	2,000	2,000	
Shipping Weight (kg)			1,375	1,385	1,535	1,870	1,545	1,715	1,855	2,015	

Every effort has been made to ensure that the information contained in this publication is as accurate and current as possible. However, inaccuracies, errors or omissions may occur and details of the specifications may be changed at any time without notice. Therefore, all specifications should be confirmed with your ISEKI Dealer or Distributor prior to any purchase.