

# AB CLASS PREMIUM AMPLIFIER FPX 4.400 SQ


Mode 4/3/2 channels

Dedicated to sound quality



- AB Class 4/3/2 Channels amplifier - Dedicated to sound quality
- Stable under 2 Ohms
- Audiophile Sanken® Transistors
- High performance compact heat dissipation chassis
- High power and current dynamic reserve

## MECHANICAL DRAWING

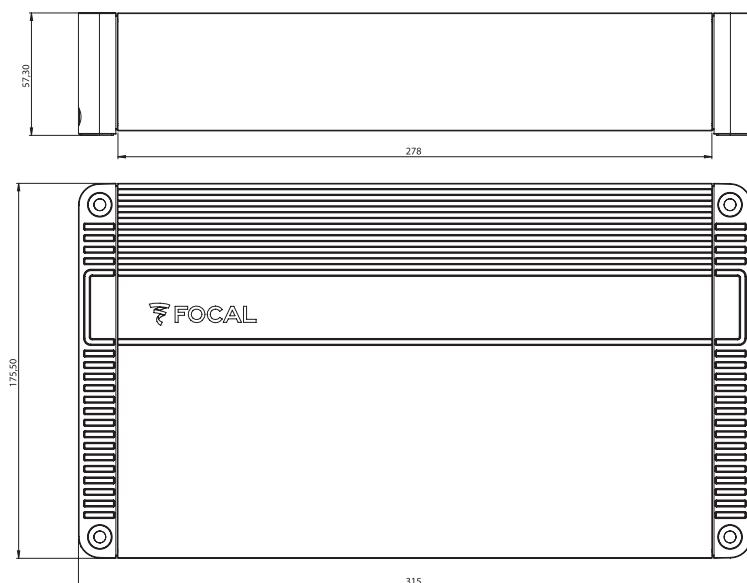

## SPECIFICATIONS

### AUDIO SPECIFICATIONS

CEA power (4 ohms)	4x70 Watts RMS
Max. power (2 ohms)	4x100 Watts RMS
Max. power (4 ohms bridged)	2x200 Watts RMS
Bandwidth (-3dB)	10Hz - 22KHz
THD	0.04%
Crosstalk (1 KHz)	> 54dB
SNR (1W/A)	> 77dBA

### GENERAL FEATURES

Subsonic filter	-
High-pass/low-pass filter	Configurable High-pass/low-pass 40Hz-5000Hz
Full-range function	✓
Mirror mode	✓
Standby current (A)	0.6 A
Protections	Short circuit/low impedance/reverse polarity/DC/voltage drop/overheat protection
Dimensions (LxWxH)	12 <sup>23/64</sup> x 6 <sup>57/64</sup> x 2 <sup>1/4</sup> " [315x175x57mm]
Weight (kg)	8.16lbs [3.7kg]
Operating voltage range	8.3 to 16V

**Performance**  
CREATE YOUR SOUND

**FOCAL®**