


Add-On Post Filter Instruction Sheet - Gravity Filters

INSTRUCTIONS

With ceramic elements installed (as instructions state), remove top container from bottom container and place upside-down on a flat surface. Remove elements from packaging, along with plastic adaptor. Screw on the plastic adaptor to the add-on elements (pliers or wrench may be needed to ensure a tight fit). With ceramic elements installed, leaving the wing-nut and washer in place, screw the add-on filters on to the exposed threaded end of the ceramic element in gravity filter. Re-assemble top container onto top container, as instructed, and the system is ready to be filled. Please discard first run of filtered water as there may be loose dust particles that can create an aftertaste. Once discarded, fill unit as normal and use as instructed.

DATA

This add-on filter* is only to be used in conjunction with the ceramic filter elements contained in this gravity filter unit. The filters should be flushed upon installation, first supply of filtered water should be discarded after first run of these elements. These filters will last approximately 400 gallons or 6 months, upon regular daily usage. With these add-on filters installed, flow rate will drop considerably if water in the bottom container is above the half-way point.

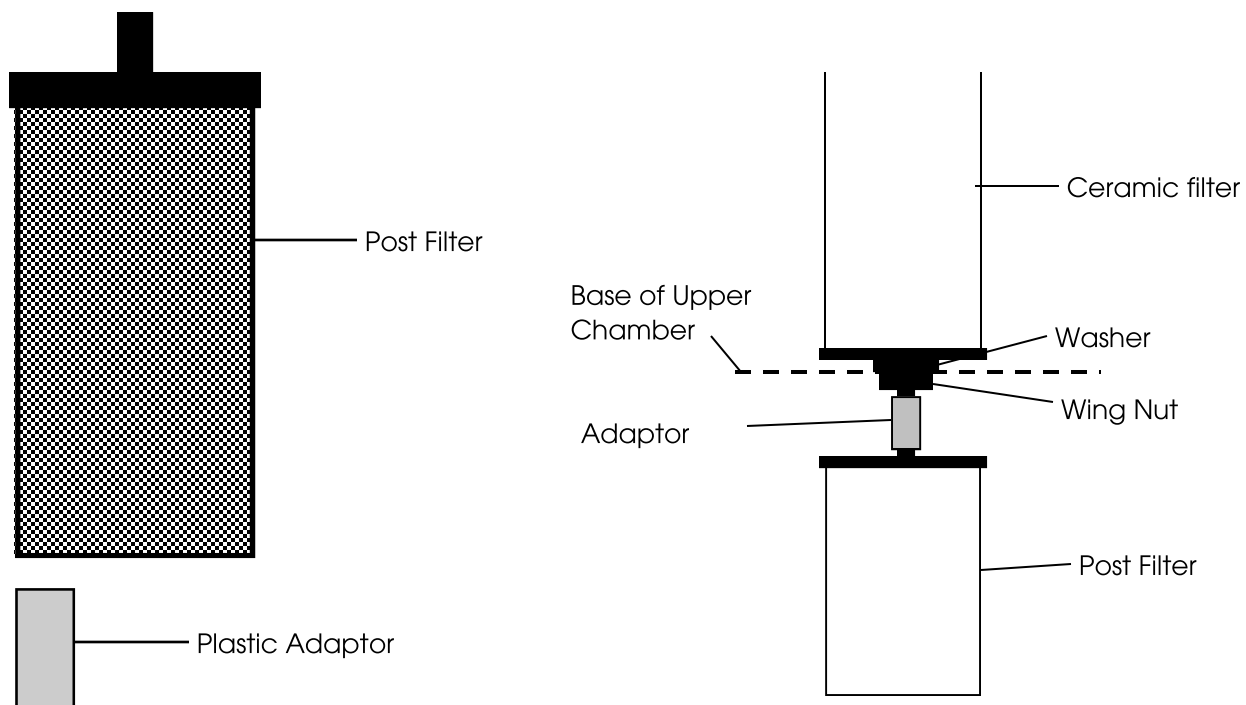

*This add-on filter is manufactured and constructed using FDA approved materials.