MultiRound HF Housing

MR500-SS

The MR500-SS holds 5 AquaMetix® 20" cartridges designed to offer a high flow solution for specific removals of challenging contaminants. Housing utilizes 1.5" Inlet & Outlet and features a swing bolt lid.

Tested for the reduction of Chloramine, Chlorine, Lead, and Mercury

Capacities:

35000 gallons Chloramine >99% (Non-detect)

40000 gallons Mercury >98%

35000 gallons Lead >99%

70000 gallons Chlorine >99% (Non-detect)


Built-In Pressure Gauge

Built-In Pressure Release

Will also reduce other contaminants not listed above





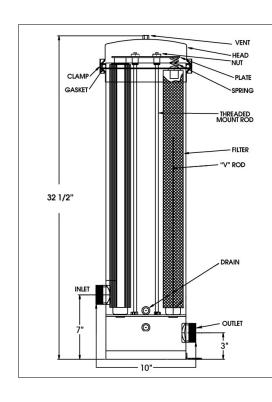

316 SS
304 SS
Silicone
Band Clamp
1.5"
32.5"
10"
5/7 GPM
20 GPM
90 PSI
125° F
40 lbs
37"x17"x17"
6-12 Months

MultiRound HF Housing

MR700-SS

AQUAMETIX®

The MR700-SS holds 7 AquaMetix® 20" cartridges designed to offer a high flow solution for specific removals of challenging contaminants. Housing utilizes 1.5" Inlet & Outlet and features a band clamp lid.

Tested for the reduction of Chloramine, Chlorine, Lead, and Mercury

Capacities:

49000 gallons Chloramine >99% (Non-detect)

56000 gallons Mercury >98%

49000 gallons Lead >99%


98000 gallons Chlorine >99% (Non-detect)

Built-In Pressure Gauge

Built-In Pressure Release

Will also reduce other contaminants not listed above



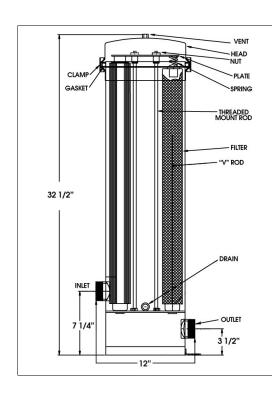

Material, Body & Caps	316 SS
Material, Eye Bolts	304 SS
O-Ring	Silicone
Lid Closure Type	Band Clamp
Inlet/Outlet (Slip Connection)	1.5"
Overall Height	32.5"
Width	12"
Rated Flow	7/10 GPM
Maximum Flow	28 GPM
Maximum working pressure	90 PSI
Maximum temperature (housing)	125° F
Shipping Weight (Empty)	55 lbs
Carton dimensions	37"x17"x17"
Filter Change Frequency	6-12 Months