

AIR-OPERATED DOUBLE DIAPHRAGM PUMP

Meclube Model FOOD SS35

Ex EX II 3/3 GD c IIB T 135°C ATEX zone2

FDA
compliant

Made in Stainless Steel AISI 316 electro-polished

Compression ratio: 1:1

Max flow-rate: 35 l/min

Fluid connections: Tri-Clamp 1"




Article	Casing	Diaphragm	Balls	Gasket	Fluids
028-F035-AB1	SS AISI 316 E-P	NBR+PTFE	SS AISI 316	PTFE	Food & Drink
028-F035-AB2	SS AISI 316 E-P	NBR+PTFE	PTFE	PTFE	Food & Drink

TECHNICAL DATA:

- Fluid connections: Tri-Clamp 1"
- Air connection: 6mm
- Max flow-rate: 35 l/min
- Max air pressure: 8 bar
- Max delivery head: 80m
- Max Suction Lift Dry: 5,0m
- Max Suction Lift Wet: 9,8m
- Max Solid passing: 3,5mm
- Noise level: 65dB
- Displacement per cycle: 50cm³
- Max Viscosity: 15000 cps

PERFORMANCE:

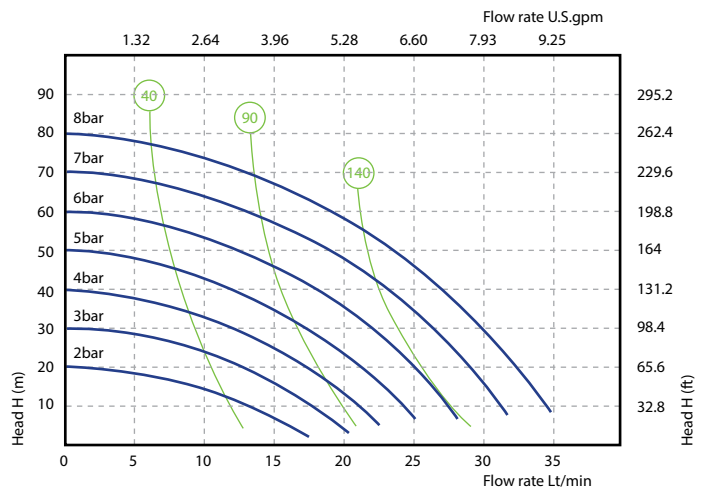

The curves and performance values refer to pumps with submerged suction and a free delivery outlet with water at 20°C, and vary according to the construction material.

DIMENSIONS:

- A (mm): 182
- B (mm): 104
- C (mm): 190
- Weight kg: 2,4
- MAX Temperature: 95°C

