




## 20" TRD Pro grille-mounted light bar bracket instructions

1. Line the 3 holes of the top bracket with the 3 holes of the light bar tabs on the top of the light bar as shown.
2. Line the 2 holes of the bottom bracket with the 2 holes of the light bar tabs on the bottom of the light bar as shown.

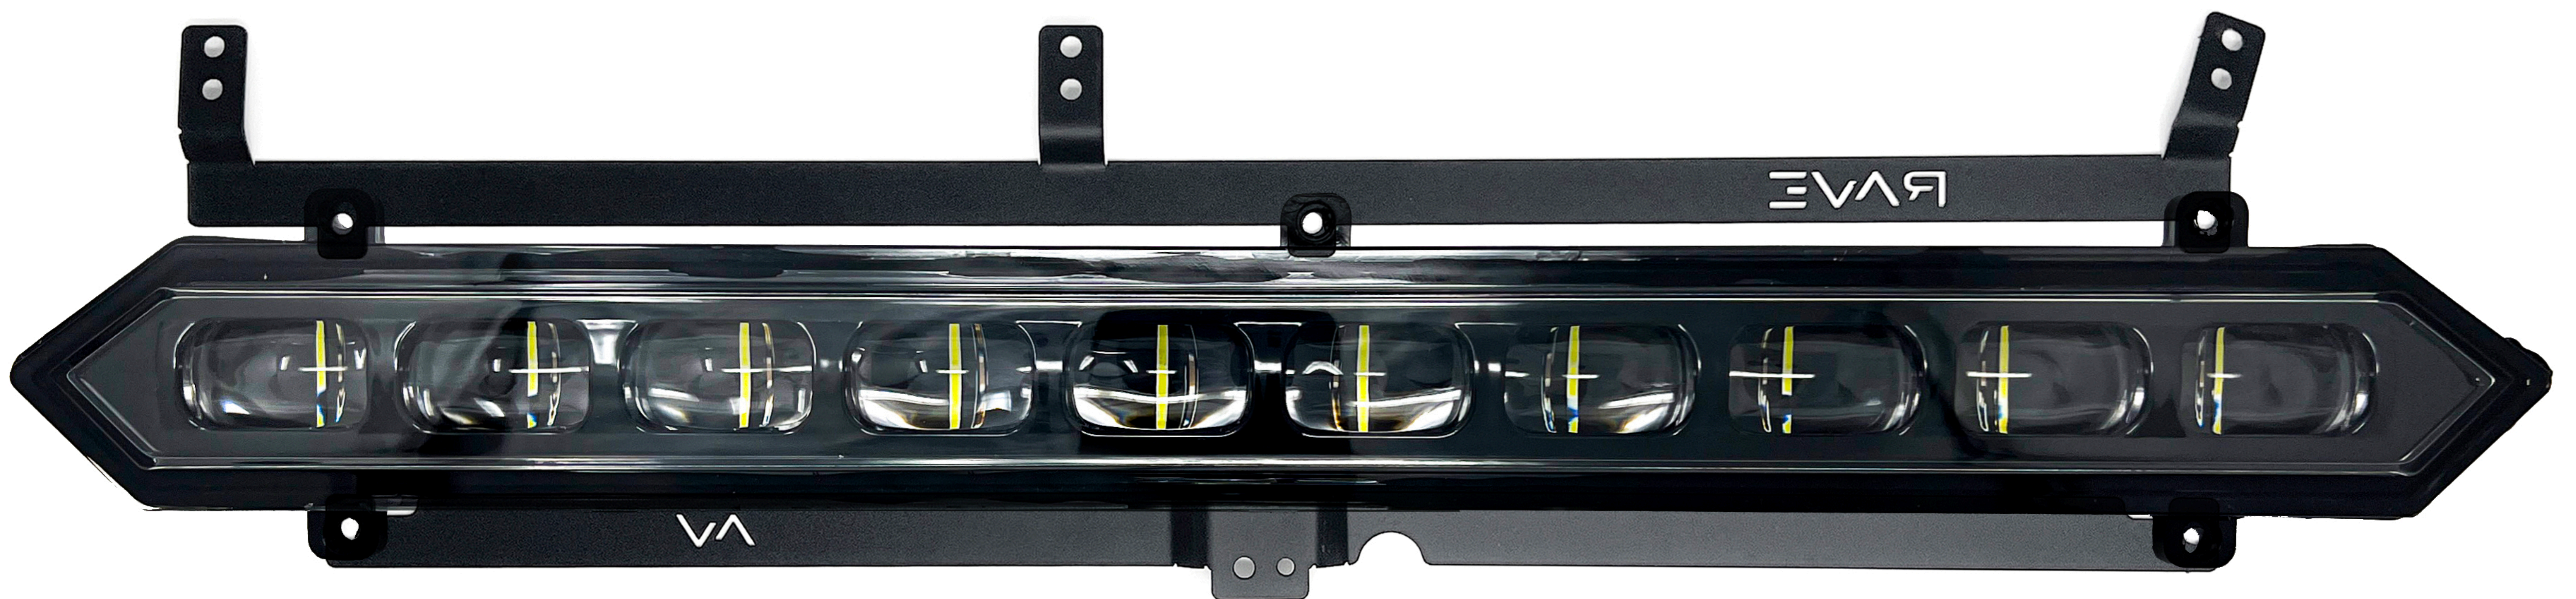

3. Drop a button head cap screw through each of the 5 spots where the light bar tab holes and bracket holes line up.
4. Fasten a flange nut to the threaded side of the button head cap screws and tighten so that the bracket and light bar become mounted together. (hardware provided)