
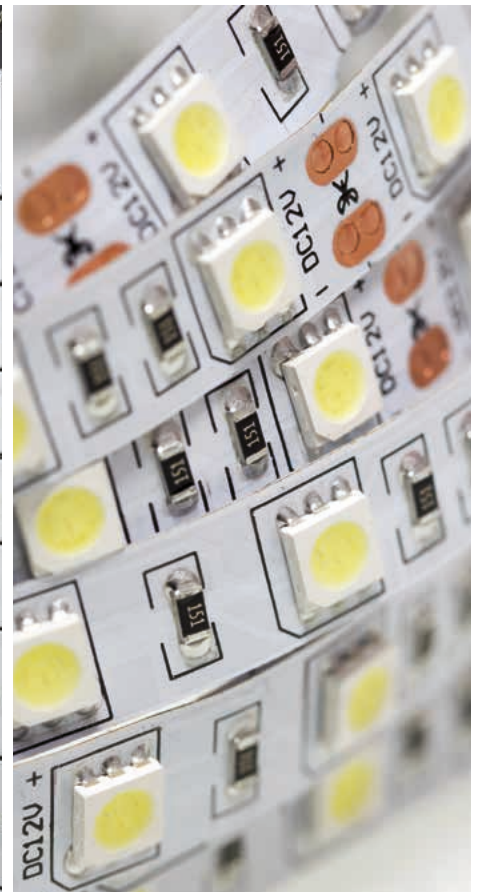
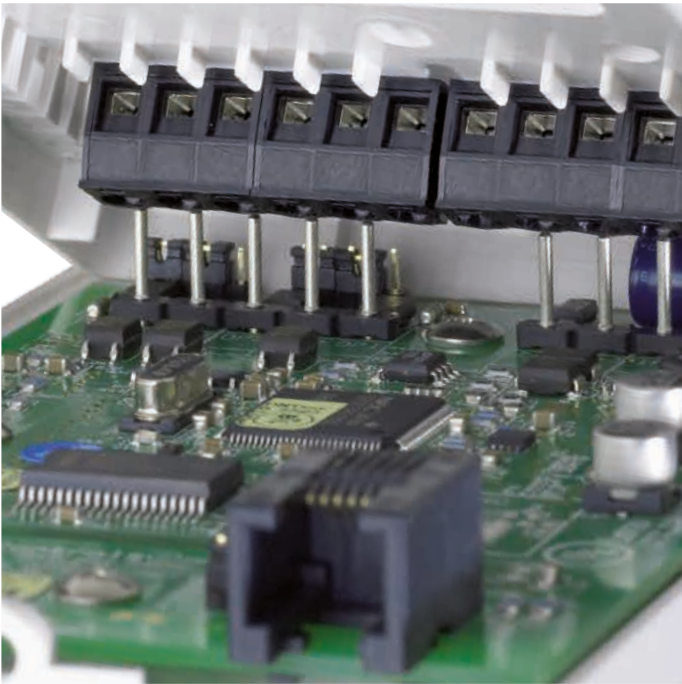


wiecon®

AT A GLANCE

Printed circuit board terminals
and connectors overview.

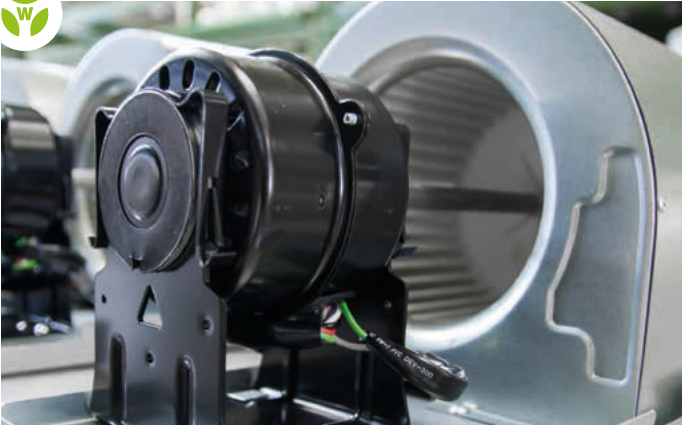


CONTENT

- 04** wiecon® Portfolio
- 06** wiecon® areas of application
- 07** Connect safely and comfortably –
Connection technologies at a glance
- 08** Simple contacting - direct plug-in technology explained
- 10** Efficient placement - THR Technology explained
- 14** Printed circuit board connectors –
Safe, compact and yet highly-functional
- 24** RAST 5 terminals – Standardized products in 5 mm pitch
- 26** Printed circuit board terminals – Universal connection technology
for the highest current and voltage requirements
- 32** wiecon® FSC – Super-Fast signal distribution
- 34** Domestic appliance standard + facts on No Flame
- 36** RAST 5 Coding matrix and combination possibilities
- 38** Smart servicing + services
- 39** Information and contacts

CONTACTING THE PCB IS EASY WITH **WIECON**®.

Are you looking for the right contacting for circuit boards or in the control cabinet? We have the best solution for you. The “wiecon” portfolio offers you numerous products with a wide variety of connection technologies. Whether service-friendly connectors or proven circuit board terminals, at Wieland you will find the right products for power, data and signal transfer.

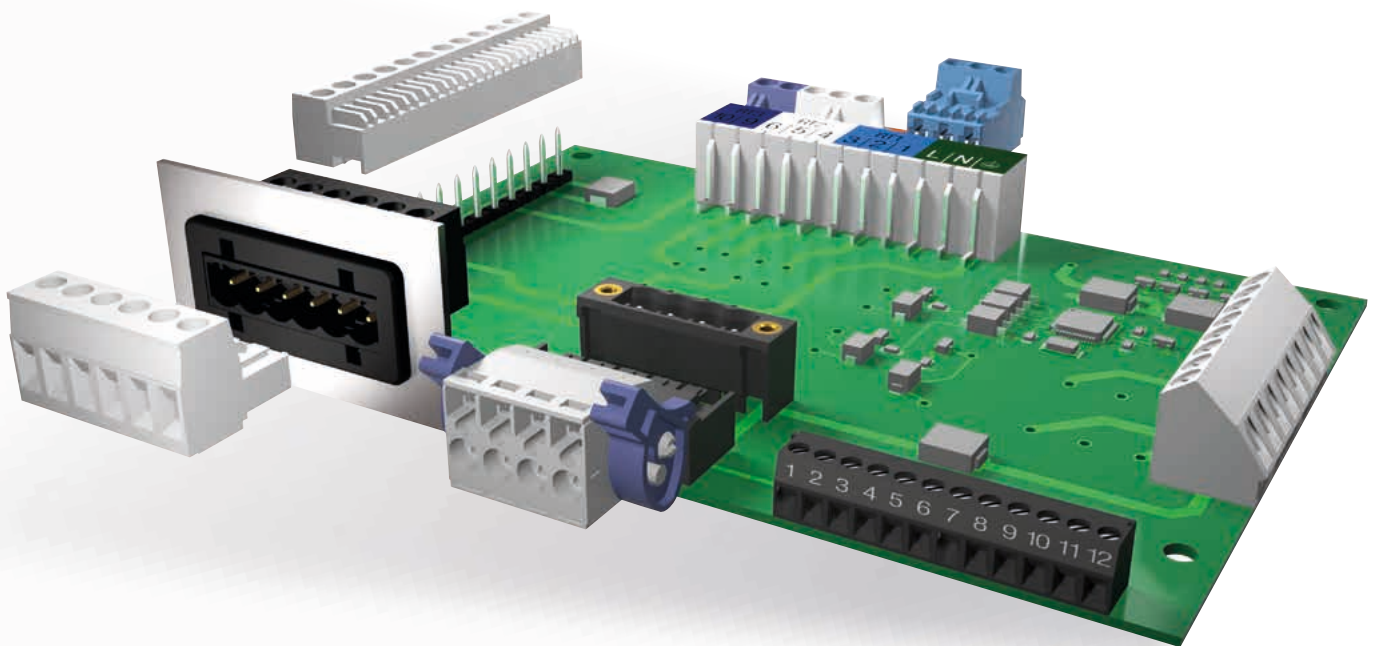

NO FLAME

According to glowing wire test, according to household appliance standard DIN EN/IEC 60335-1. The housing material used was tested by the VDE and has passed the required glowing wire tests. It therefore fulfills the requirements of the stricter household appliance standard.



ROHS-COMPLIANT

These articles comply with the EU Directive (2011/65/EU) on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS), which does not contain such substances above the permitted concentration limits.




TAPE-ON-REEL

This product is available packed on a Tape-on-Reel. For information about the number of poles, item numbers, reel widths, belt heights and packaging units, please see the data sheet in our eShop.



DIRECT PLUGGING TECHNOLOGY

- Wire cross-sections from 0.14 mm² to 4 mm²
- For currents up to 6 A and voltages up to 320 V
- Various circuit board thicknesses possible (1.4 – 1.8 mm)
- Direct contacting of the circuit board
- Clamping yoke connection for easy reconnection
- Modular spacing 5.0 mm

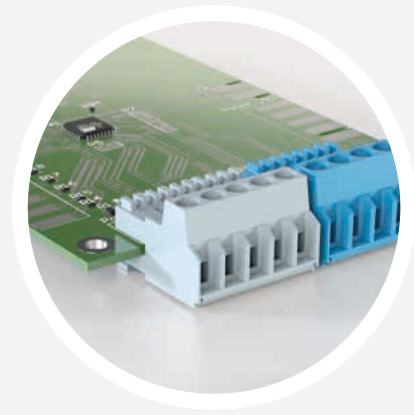


PCB CONNECTORS

- Wire cross-sections from 0.14 mm² to 4 mm²
- For currents up to 12 A and voltages up to 1000 V
- With screw, tension spring or push-in connection
- Various connection directions and configurations
- Modular spacing 3.5 mm to 7.62 mm



PCB TERMINALS

- Wire cross-sections from 0.14 mm² to 16 mm²
- For currents up to 76 A and voltages up to 1000 V
- With screw, tension spring or push-in connection
- Various connection directions and configurations
- Modular spacing 3.5 mm to 10.16 mm or 20.32 mm

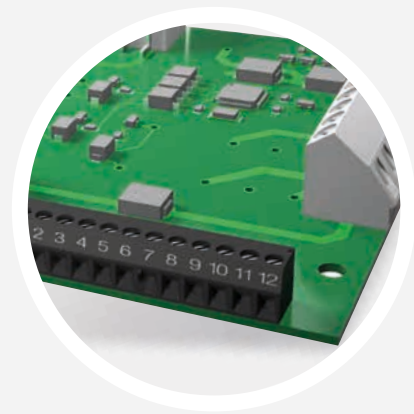

FSC: THE PLUGGABLE SIGNAL CABLING

- “Fast signal connection” – a complete system, compact and tailored to your needs
- Transfer data easily, quickly and securely and install in space-saving fashion
- For currents up to 3 A and voltages up to 24 V
- Up to 32 coding options
- IP 54



WIECON® USE IN PRACTICE.

We offer the right solution for your application.

Whether the latest heating systems, state-of-the-art compressors or safety technology in mechanical engineering, with our wiecon® printed circuit board terminal program we offer you varied, reliable and service-friendly solutions.


SAFETY + SECURITY

- FSC system
- Housing systems type WEB1001/1002 and wiebox
- Printed circuit board connectors type 8113, 8213, 8513
- Pluggable printed circuit board terminals type 8142
- Printed circuit board terminals 8562 N and 7060 SMD




HEATING, VENTILATION, AIR CONDITIONING

- RAST 5 system type 8105
- Printed circuit board connectors type 8113, 8213, 8513, 8813
- Printed circuit board terminals type 8191 R
- Pluggable printed circuit board terminals type 8142 Z
- Direct connectors type DST 85

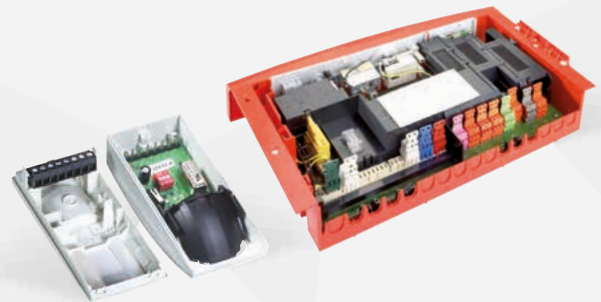

FOR THE WIND POWER SECTOR

- Printed circuit board connectors type 8113, 8213, 8513
- Printed circuit board terminals type 8191, 8291

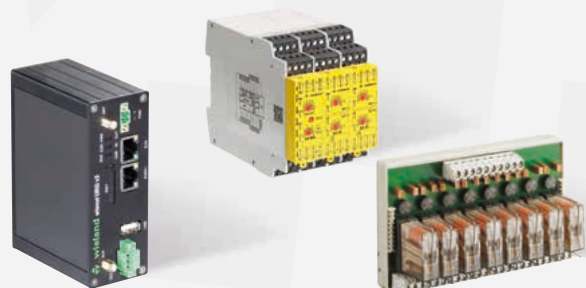

IN THE LIGHTING SECTOR

- Printed circuit board direct connectors type LST
- Printed circuit board connectors type 8513 (also as flying connection)
- Printed circuit board terminals type 8593, 8562 N, 7060 SMD






CONNECTION TECHNOLOGY.

Connect safely and comfortably.

Regardless of which connection technology you prefer or require, the Wieland product portfolio always offers you just the right high-quality connection components in the right model.

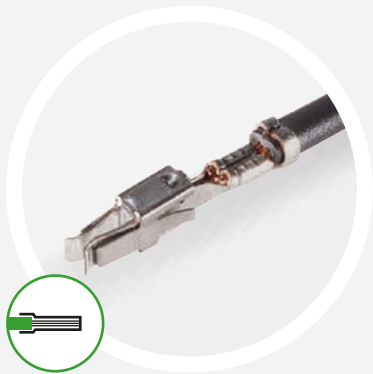


Crimp connection



Screw connection with rising cage clamp system



Screw connection with wire protection

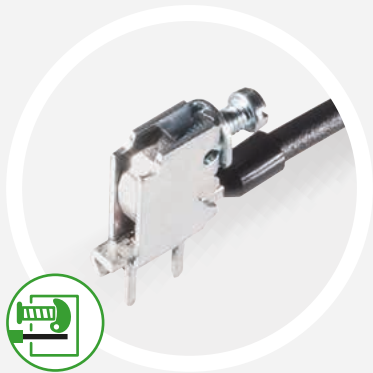

Front/Top screw connection



Push-in spring terminal with push-button



Tension spring connection




Insulation displacement connection (IDC)

TOOL-FREE THANKS TO DIRECT PLUG-IN TECHNOLOGY.

Connect PCB connectors directly to the board without soldering – the new comfortable and space-saving connection possibility.

By using our PCB terminals that can be plugged directly into the PCB, you as a product designer or developer can create added value for your systems. The increasingly compact designs of control units in heating and machine building or in building technology require new solutions.

The direct plug-in technology saves a lot of space, offers safe contacting and, in addition, has a great potential to save time and money, as the pin or male connector can be dispensed with.

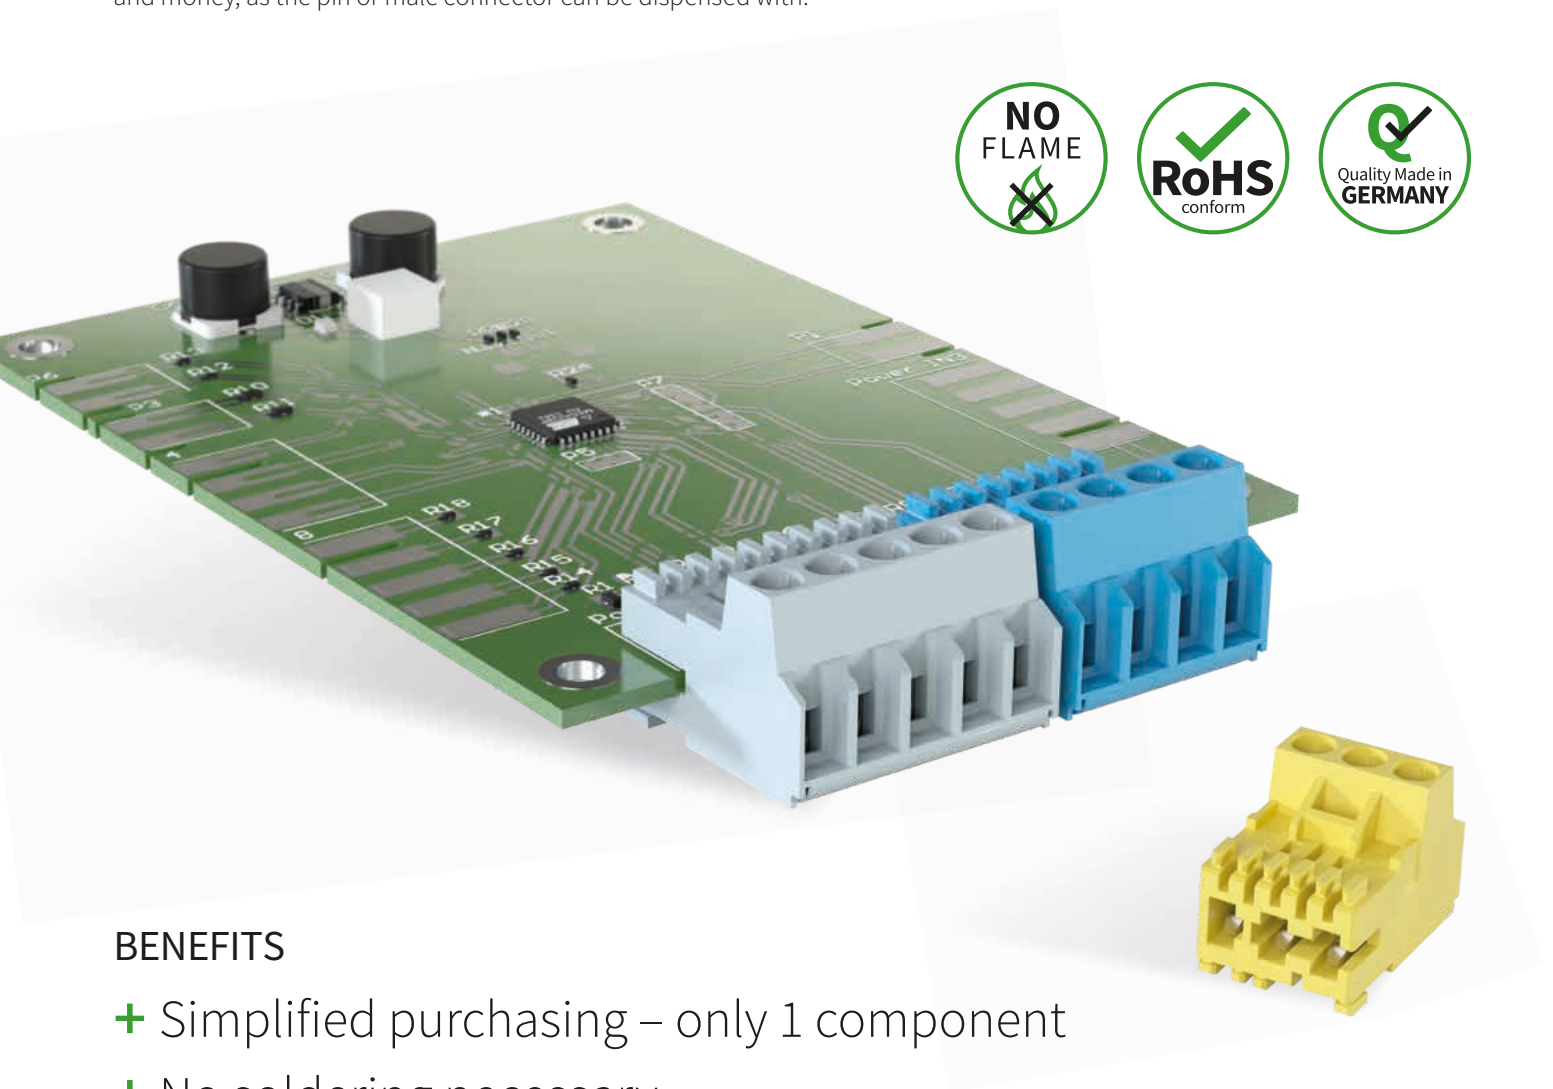

BENEFITS

- + Simplified purchasing – only 1 component
- + No soldering necessary
- + Different circuit board thicknesses possible (1.4 – 1.8 mm)
- + Proven clamping yoke connection technology enables multi-wire connections



APPLICATION AREAS

Our direct plug-in terminals are used in control systems for the following areas:

- Heating
- Buildings
- Machines
- Home appliances



FEATURES

- No headers required – simply plug directly into the circuit board
- Side by side mounting without loss of poles
- Uses plastic material especially for DIN EN 60335-1 No Flame, in different colors
- No entry chamfer necessary on the board, thus the circuit plate becomes more cost-effective
- Underplug protection prevents plugging mistakes
- Exchangeable coding inserts enable many coding options

TEST AND SEE.



Order our sample printed circuit board and see for yourself the many advantages of the new directly pluggable 8105 DST printed circuit board terminal. All the important dimensions and order numbers can be seen straight away and immediately show you that you too can benefit from this product.

8105 DST	
Type	8105 DST
For boards with	1.4 - 1.8 mm thickness
Number of poles	2 - 7 poles
Part number	Customer specific
Color	Customer specific
Pitch	5 mm
Cross section	Fine stranded 0.14 mm ² - 2.5 mm ²
	Solid 0.14 mm ² - 4.0 mm ²
	AWG AWG 26 - 12
Rated Current	6 A
Rated insulation voltage III/2	320 V
Tightening torque	0.5 - 0.7 Nm
Wire strip length	7 mm
Sample board	99.335.0000.0

In progress

wieland
www.wieland-electric.com

Test 1:1 with our free-of-charge sample printed circuit board.
 Sample board Art. No.: **99.335.0000.0**



THR TECHNOLOGY.

The efficient process for printed circuit board fitting.


With “Through Hole-Reflow Soldering,” wired components of high-temperature-resistant material such as printed circuit board terminals, capacitors and resistances are soldered to the circuit board. In contrast to SMDs (Surface Mounted Devices), the THR components are placed with through-hole contacts in prepared holes, which are filled with soldering paste, and they then run through the reflow soldering process. Here, the printed circuit board fitted with SMDs or THR components are moved at constant speed through different temperature zones: Pre-heating, reflow, cooling off in the soldering furnace. The heating of the components, the printed circuit board and the soldering point are done primarily through convection or in the vapor phase process.

FEATURES

With THR, wired components and SMT components can be processed

- In one step
- In the same process
- With the same equipment
- Under the same conditions


EXCLUSIVELY WITH US!
3-level pin header THR

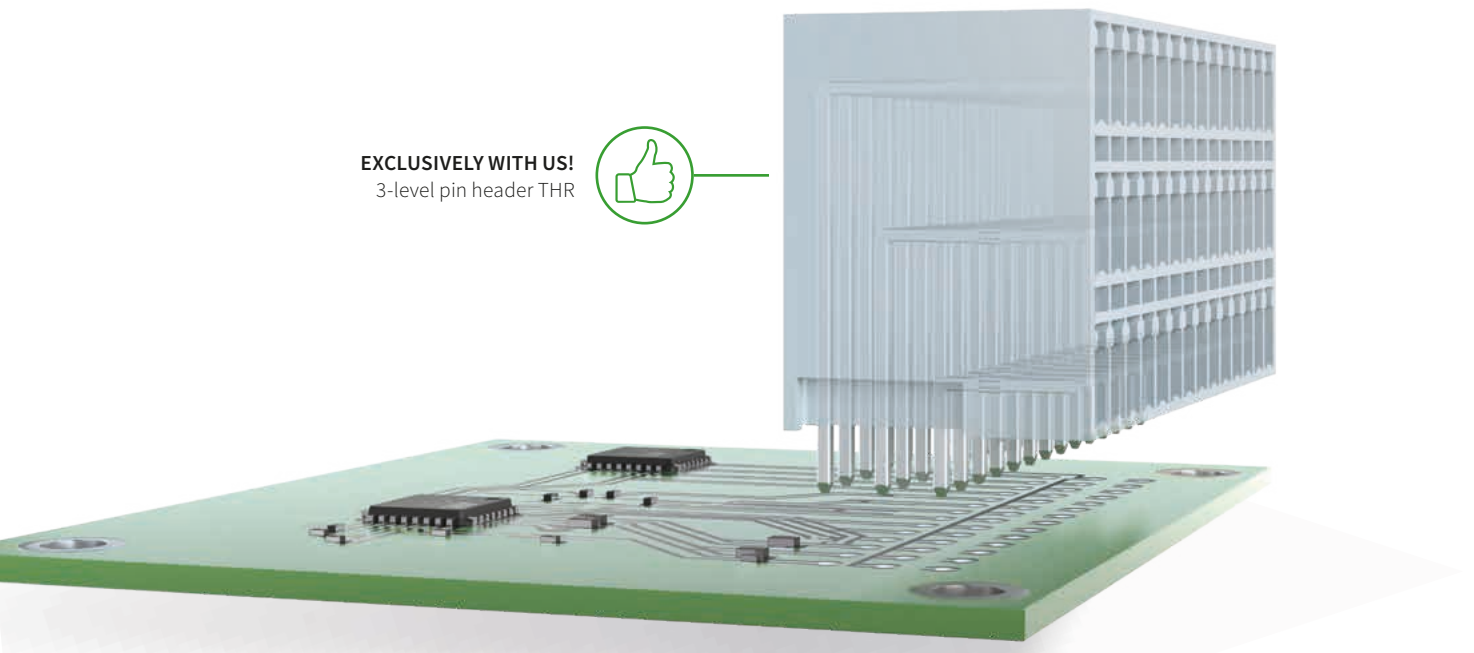


BENEFITS OF AUTOMATION

- + Reduction of production costs
- + Reduction of variants – THR parts are also suited for wave soldering
- + Sparing of process steps – more time for your core business


THR PRODUCTION STEPS.




LP with through-contacted hole




Template is positioned




Apply soldering paste




Fill hole with soldering paste




Fitting the component with a pin



Pin presses soldering paste through the hole




Reflow soldering



Printed circuit board ready soldered!

THR REQUIREMENTS.

The most important requirements of THR components arise from the automatic fitting capability, the optimal heat distribution on the pin and the THR temperature profile.

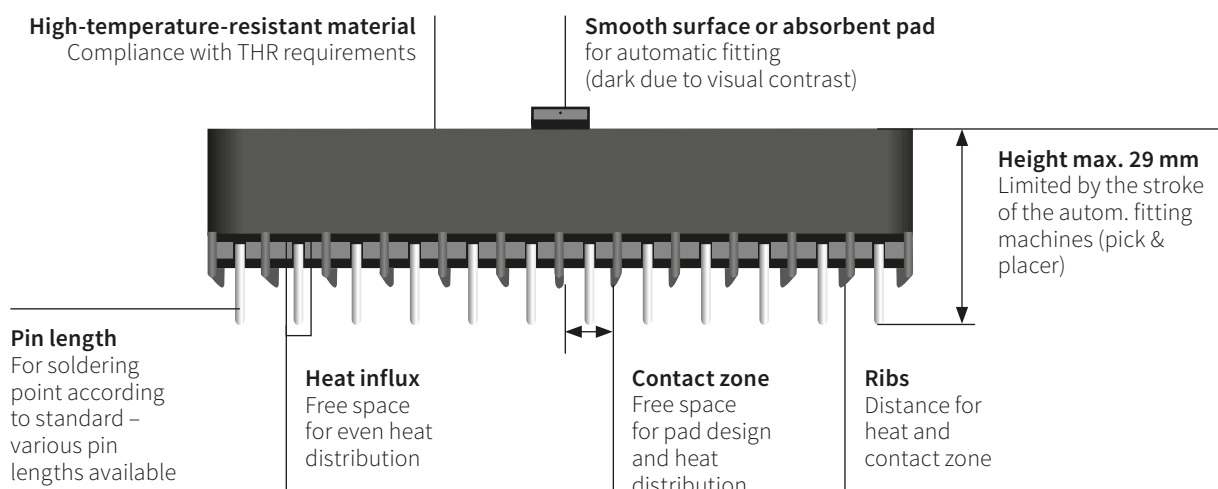



THR PACKAGING.



Tray

Use in series production for 12- and multi-pole parts




Magazine

Series production especially for unshaped products (e.g. with jumper)



Tape on Reel

Series production of 2- to 12-pole parts

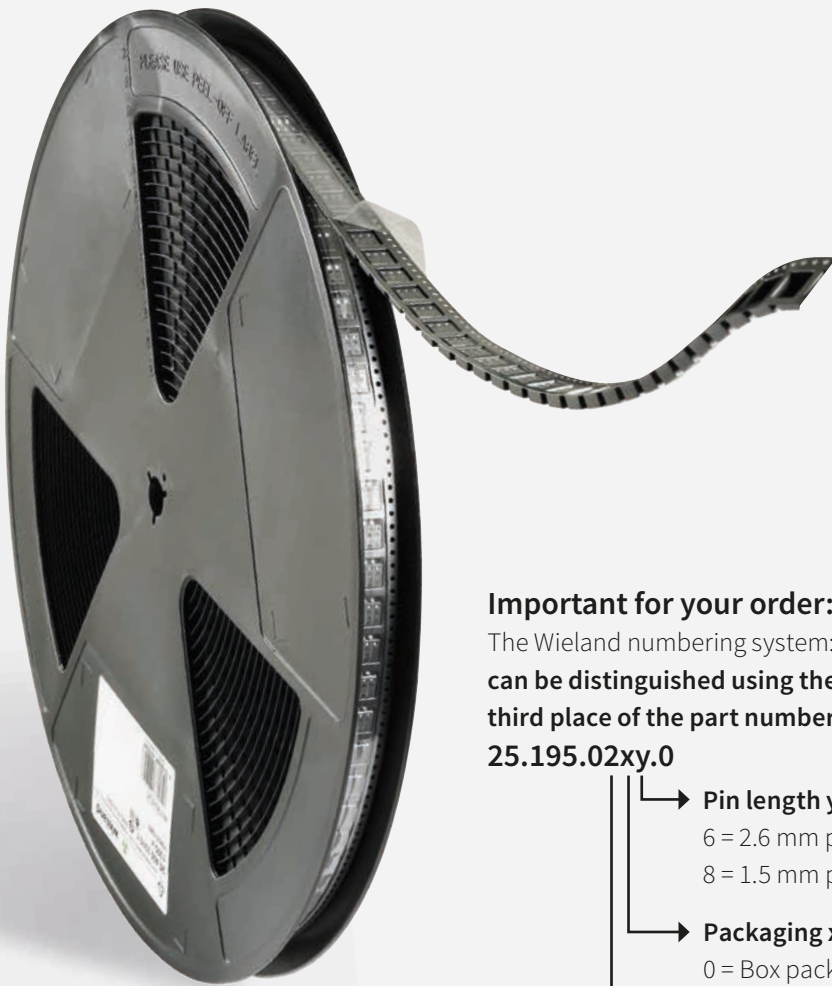

Box

Samples, zero series at the customer

Important for your order:


The Wieland numbering system: **THR part numbers can be distinguished using the second and third place of the part number**

25.195.02xy.0

- **Pin length y:**
6 = 2.6 mm pin length
8 = 1.5 mm pin length
- **Packaging x:**
0 = Box packaging
1 = Tape-on-reel packaging
- **Number of poles:**
2 = 2-pole


THR TEMPERATURES.

Recommendations (borrowing from DIN EN 61760-1).

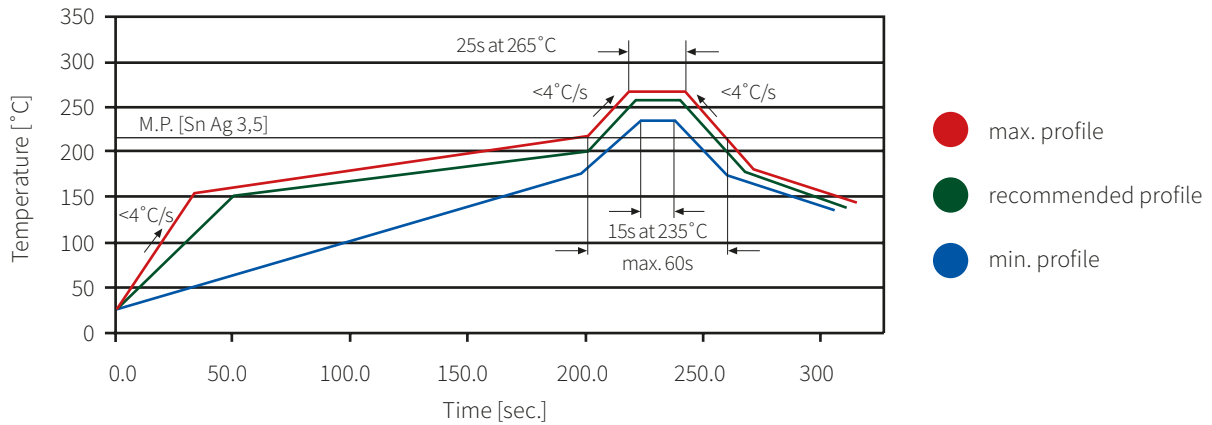


FOR ALL OTHER CASES.

Additional processes for contacting the printed circuit board.

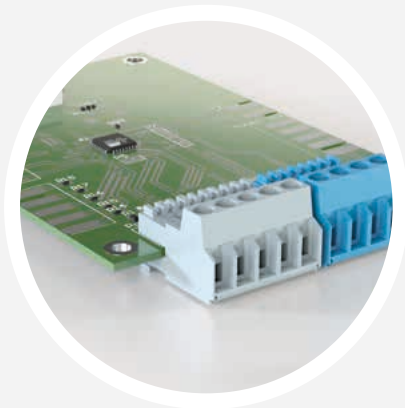

DIRECT PLUGGING TECHNOLOGY

Direct plugging technology is a solder-free assembly technology that requires no header. The connector contacts directly on the defined contact pads at the edge of the printed circuit board.

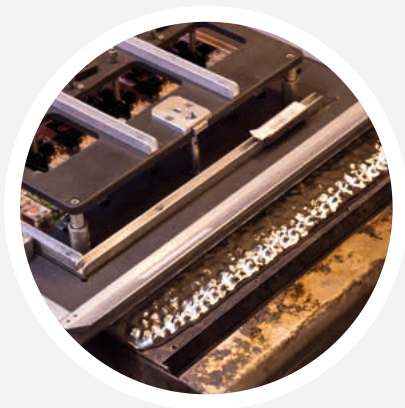

WAVE SOLDERING

The classic soldering process for manufacturing electronic assemblies that are fitted mainly with wired assemblies. Characteristic of this process is that the soldered contact protrudes at least 1 mm from the underside of the printed circuit board.

PRINTED CIRCUIT BOARD CONNECTORS.


Safe, compact and yet highly-functional.

With PCB connectors, the device becomes more service-friendly for conductor and device replacement. The free selection of the connection technology allows solutions for a wide variety of applications.

It is precisely in building and HVAC technology that the pluggable PCB terminals are used. Their compact design also offers you the benefit of pluggability.

FEATURES


- Cross-sections from 0.14 mm² to 4 mm²
- For currents up to 12 A and voltages up to 1000 V
- Connection technology in screw, spring and push-in connection
- Pitches 3.5 mm to 7.62 mm
- Codeable
- THR products and No Flame variants available
- Snap-in variants
- Female connectors can be arranged in a pitch

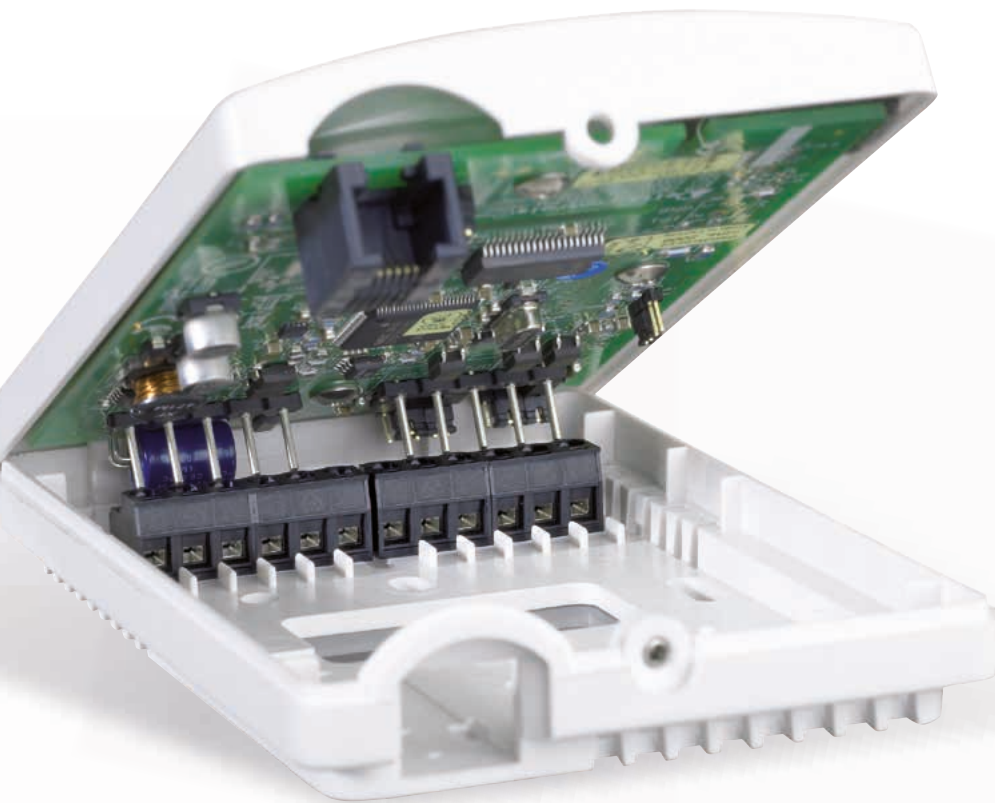

BENEFITS OF THE PLUGGABILITY


- + Decentralized creation of assemblies
- + Prevention of cabling mistakes
- + Easy disassembly for service purposes
- + Simple conductor connection for tight spaces

OVERVIEW BENEFITS.

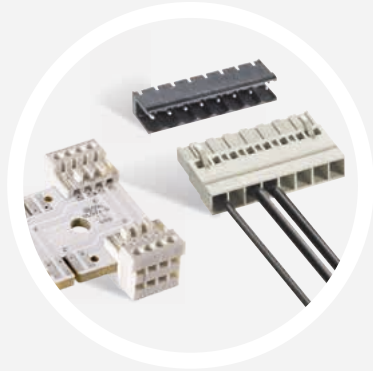


Space-saving

Optimized for the largest cross-sections with the smallest space requirements

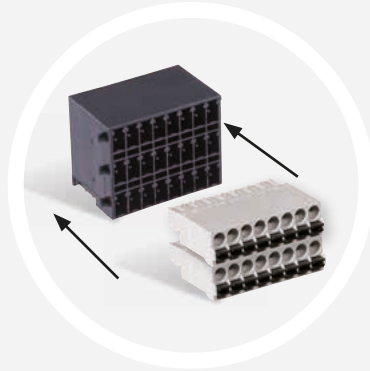


Multi-level plug connectors

Increasing of the number of clamp positions thanks to several levels

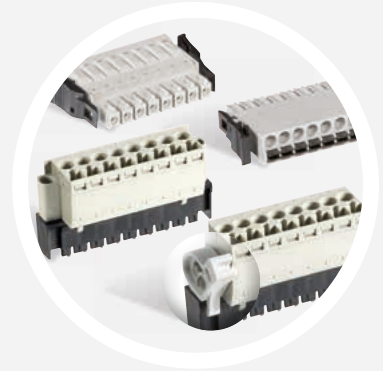

Innovative interlocking

Lock and release interlocking, screw flange and locking flange

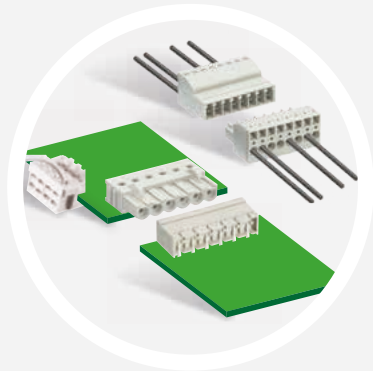

Combination possibilities

Wire to board, wire to wire and board to board connections



Plug connectors without housing

for wave and reflow soldering process with tin or silver surface




Clear assignment

Color distinction with customer-specific printing




Mechanical coding, pluggable or molded coded

Special coding tab and profiles prevent plugging mistakes

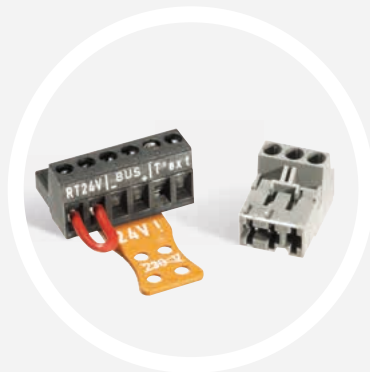

Specially fitted

E.g. with internal jumpering, jumpers, empty poles, extraction aid

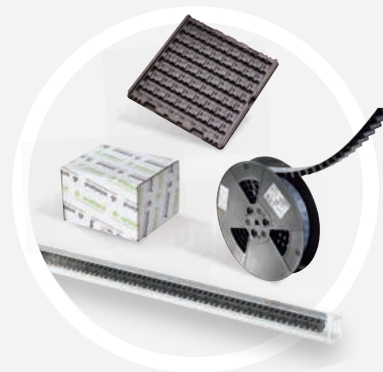

Well-packaged

Always kept safely with tape-on-reel, magazine, tray or in box packaging



EXPRESS SAMPLE DELIVERY.

Our sample service for you!

You are interested in our wiecon® PCB terminals portfolio and would like to test the product features live? We would be pleased to send you samples of all the articles mentioned in this brochure without obligation. All articles are delivered in a sample box.

Technical support
PCB terminals

Phone: +49 951 9324-994



48 h

Express delivery
of samples
within Europe



3D

Data, drawings
technical documents
available online



2-16




Sample available in the
pole numbers 2 to 16.
17 to 24-pole on request










2






Find the right product
in only 2 steps in
our shop

Printed circuit board connectors

		THT headers		
3.5 mm PITCH				
		8513 S/...G	8513 S/...W	8513 SEG
Item no. standard		25.646.0853.0	25.647.0853.0	27.647.0853.1
Item no. flange		25.646.3853.0	25.647.3853.0	
mm ² / AWG (fine-stranded)		Depending on the female connector used		
Current A	IEC/UL/CSA	Depending on the female connector used		
Voltage ¹⁾ V	IEC/UL/CSA	Depending on the female connector used		






		THT headers	
3.81 mm PITCH			
		8813 S/...G	8813 S/...W
Item no. standard		25.626.0853.0	25.627.0853.0
Item no. flange		25.626.3453.0	25.627.3853.0
mm ² / AWG (fine-stranded)		Depending on the female connector used	
Current A	IEC/UL/CSA	Depending on the female connector used	
Voltage ¹⁾ V	IEC/UL/CSA	Depending on the female connector used	

		THT headers				
5.0 mm PITCH						
		8113 S/...G	8113 S/...W	8113 S/...GOF	8113 S/...WOF	8113 S/...S1
Item no. standard		25.330.3853.0	25.332.3853.0	99.208.9996.0	99.268.9996.0	25.394.3853.0
Item no. flange		25.338.3453.0	25.339.3853.0			
mm ² / AWG (fine-stranded)		Depending on the female connector used				Depending on the female connector used
Current A	IEC/UL/CSA	Depending on the female connector used				Depending on the female connector used
Voltage ¹⁾ V	IEC/UL/CSA	Depending on the female connector used				Depending on the female connector used

		THT headers				
5.08 mm PITCH						
		8213 S/...G	8213 S/...W	8213 S/...GOF	8213 S/...WOF	8213 S/...S1
Item no. standard		25.350.3853.0	25.352.3853.0	99.236.9996.1	99.208.9996.2	25.396.3853.0
Item no. flange		25.359.3453.0	25.358.4053.0			
mm ² / AWG (fine-stranded)		Depending on the female connector used				Depending on the female connector used
Current A	IEC/UL/CSA	Depending on the female connector used				Depending on the female connector used
Voltage ¹⁾ V	IEC/UL/CSA	Depending on the female connector used				Depending on the female connector used






1) Rated voltage for overvoltage category III / pollution degree 2

2) Plug connectors are available in different lengths

 45°				
	8113 SEG/...W	8113 SEG/...G	8113 SE/...G	8113 SE/...W
	27.336.0953.0	27.334.0353.0	25.334.3353.0	25.336.3353.0

male connector used



Depending on the female connector used

 45°				
	8213 SEG/...W	8213 SEG/...G	8213 SE/...G	8213 SE/...W
	27.356.0353.0	Upon request	25.354.3353.0	25.356.3253.0

male connector used

Board to Board

Inv. THT connector

	
8213 BL/...G	8213 BL/...W
25.342.3653.0	25.343.3353.0
-	-
12 / 15 / 15	12 / 15 / 15
690 / 300 / 300	690 / 300 / 300











Tape on reel packaging



No Flame Material





THR headers 2)

					
also 	also 				
8513 S/...G THR	8513 S/...W THR	8513 SEGN/...G THR	8513 SEGN/...W THR	8513 SDGN/...G THR	8513 SDGN/...W THR
25.646.0808.0	25.647.0806.0	25.656.0808.0	25.657.0808.0	25.666.0806.0	25.667.0506.0
		25.656.6808.0	25.657.6708.0	25.666.6806.0	25.667.6806.0

Depending on the female connector used

Depending on the female connector used

THR headers 2)

	
also 	also 
8813 S/...G THR	8813 S/...W THR
27.626.0808.0	27.627.0808.0
Upon request	Upon request

Depending on the female connector used

THR headers 2)

	
also 	also 
8113 S/...G THR	8113 S/...W THR
25.330.3406.0	25.332.3406.0

Depending on the female connector used

THR headers 2)


			
also 	also 		
8213 S/...G THR	8213 S/...W THR	8213 S/...GOF THR	8213 S/...WOF THR
25.350.3606.0	25.352.3406.0	26.350.3606.0	26.352.3806.0
25.359.3306.0	25.358.3806.0		

Depending on the female connector used

Inv. connector

	
8213 SUFK	
25.857.3553.0	
0.2 - 2.5 / 22 - 12	
12 / 12 / 12	
400 / 300 / 300	


1.5 mm² connectors

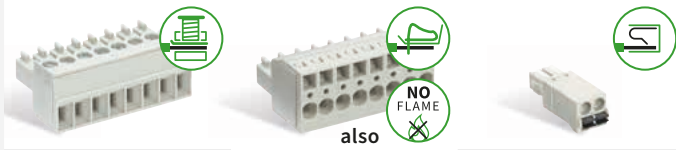

8513 B	8513 BFK	8513 BS
25.640.3853.0	25.630.3853.0	27.630.3253.0
25.641.3853.0	25.631.3853.0	27.631.3353.0
0.14 - 1.5 / 30 - 16	0.14 - 1.5 / 30 - 16	0.2 - 1.5 / 24 - 16
8 / 8 / 5	8 / 8 / 5	8 / 8 / 8
250 / 300 / 300	250 / 300 / 300	160 / 150 / 150


Flying connection

Inv. 1.5 mm² connector

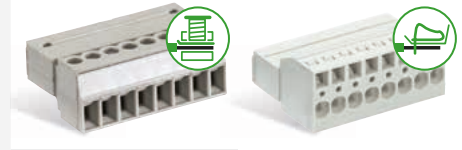

8513 SU	8513 SUFK
25.648.3853.0	25.642.3853.0
0.14 - 1.5 / 30 - 16	0.14 - 1.5 / 30 - 16
8 / 8 / 5	8 / 8 / 5
250 / 300 / 300	250 / 300 / 300

1.5 mm² connectors

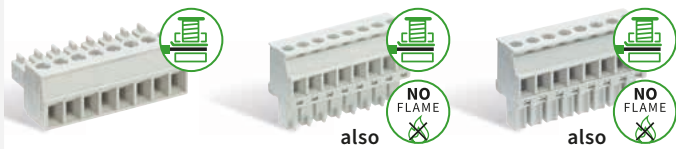


8813 B	8813 B VR	8813 B VL
25.620.3853.0	25.622.3853.0	25.624.3853.0
25.621.3853.0	25.623.3453.0	25.625.3853.0
0.14 - 1.5 / 30 - 16	0.14 - 1.5 / 30 - 16	0.14 - 1.5 / 30 - 16
8 / 8 / 5	8 / 8 / 5	8 / 8 / 5
250 / 300 / 300	250 / 300 / 300	250 / 300 / 300

2.5 mm² connectors



8113 B	8113 B VR	8113 B VL	8113 B TOP	8113 BFK	8113 BK
25.320.3853.0	25.325.3853.0	25.326.3453.0	25.220.3453.0	25.820.3853.0	01.060.3853.0 (Iso)
25.322.3853.0				25.821.3853.0	02.125.1727.0 Contacts
0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 22 - 12	0.5 - 2.5 / 21 - 12
12 / 15 / 15	12 / 15 / 15	12 / 15 / 15	12 / 15 / 15	12 / 12 / 12	12 / 15 / 13
400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300

2.5 mm² connectors

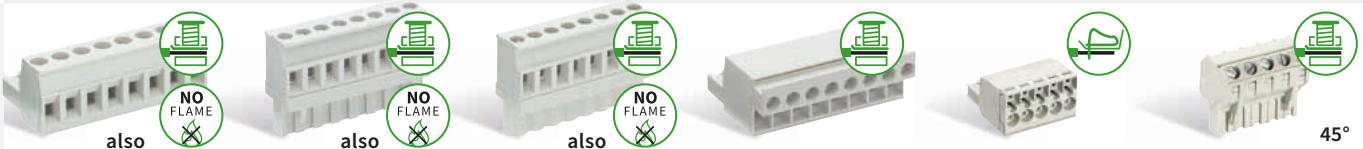

8213 B	8213 B VR	8213 B VL	8213 B TOP	8213 BFK	8213 B/...S
25.340.3853.0	25.345.3853.0	25.346.3853.0	25.240.3853.0	25.840.3553.0	27.341.3553.0
25.323.3353.0	25.344.3853.0	25.349.3853.0	25.245.3853.0	25.841.3453.0 / 25.843.0853.0	02.125.1727.0
0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 30 - 12	0.2 - 2.5 / 22 - 12	0.5 - 2.5 / 26 - 12
12 / 15 / 15	12 / 15 / 15	12 / 15 / 15	12 / 15 / 15	12 / 12 / 12	12 / 10 / 15
400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300

Connection types



Tension spring connection



Screw connection with rising cage clamp



Push-in connection



Crimp connection




Front/Top screw connection

Printed circuit board connectors

THT headers


7.5 mm PITCH





		8313 S/...G	8313 S/...W
Item no. standard		25.370.3853.0	25.372.3753.0
Item no. flange		25.374.6853.0	25.374.2453.0
mm ² / AWG (fine-stranded)		Depending on the female connector used	
Current	A	IEC/UL/CSA	
Voltage ¹⁾	V	IEC/UL/CSA	

2.5 mm² connector

7.5 mm PITCH








also

		8313 B
Item no. standard		25.360.3553.0
Item no. flange		25.324.2253.0
mm ² / AWG (fine-stranded)		0.14 - 2.5 / 22 - 12
Current	A	IEC/UL/CSA 12 / 15 / 15
Voltage ¹⁾	V	IEC/UL/CSA 690 / 300 / 300

THT headers


7.62 mm PITCH





		8413 S/...G	8413 S/...W
Item no. standard		25.390.3853.0	25.392.3853.0
Item no. flange		25.398.6853.0	25.398.2853.0
mm ² / AWG (fine-stranded)		Depending on the female connector used	
Current	A	IEC/UL/CSA	
Voltage ¹⁾	V	IEC/UL/CSA	

2.5 mm² connector

7.62 mm PITCH







also

		8413 B	8413 B VR	8413 B VL	8413 BFK
Item no. standard		25.380.3753.0	25.385.2653.0	25.386.2353.0	25.880.3653.0
Item no. flange		25.324.6853.0			25.881.3853.0
mm ² / AWG (fine-stranded)		0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
Current	A	IEC/UL/CSA 12 / 15 / 15	12 / 15 / 15	12 / 15 / 15	12 / 15 / 15
Voltage ¹⁾	V	IEC/UL/CSA 690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

1) Rated voltage for overvoltage category III / pollution degree 2

Connection types



Tension spring connection








Screw connection with rising cage clamp





No Flame Material

Pluggable Terminal Block + Headers

		Pluggable Terminal Block		Headers ²⁾	
3.5 mm PITCH		 			
		8543		Straight	90° angled
Item no. standard		25.602.5853.0		Z5.531.4025.0	Z5.532.3825.0
mm ² / AWG (fine-stranded)		0.1 - 1.0 / 22 - 16		Soldered pin Ø 1 mm	Soldered pin Ø 1 mm
Current A	IEC/UL/CSA	6 / 10 / 10		Z5.531.0825.0	Z5.532.0625.0
Voltage ¹⁾ V	IEC/UL/CSA	250 / 300 / 300		Soldered pin Ø 0.8 mm	Soldered pin Ø 0.8 mm

		Pluggable Terminal Block	
5.0 mm PITCH		 	
		8142	
Item no. standard		25.602.2853.0	
		Pull-off force <2.5 N/pole	
mm ² / AWG (fine-stranded)		0.14 - 2.5 / 22 - 12	
Current A	IEC/UL/CSA	8 / 13 / 15	
Voltage ¹⁾ V	IEC/UL/CSA	250 / 300 / 300	

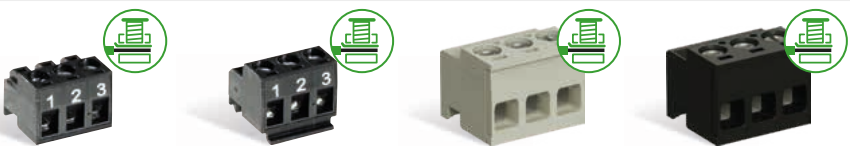		Pluggable Terminal Block			
5.0 mm PITCH					
		8142 Z	8142 Z RF	8142 ZP	8142 ZP
Item no. standard		25.612.0356.1	25.613.0356.1	25.617.0355.0	25.617.2255.0
Item no. flange					
mm ² / AWG (fine-stranded)		0.5 - 2.5 / 20 - 14	0.5 - 2.5 / 20 - 14	0.14 - 2.5 / AWG 26-12	0.14 - 2.5 / AWG 26-12
Current A	IEC/UL/CSA	3 / 3 / 3	3 / 3 / 3	12 / 12 / 12	16 / - / -
Voltage ¹⁾ V	IEC/UL/CSA	250 / 300 / 300	250 / 300 / 300	600 / 300 / 300	600 / - / -

		Headers ²⁾			
5.0 mm PITCH					
		90° angled	Straight 14.5 mm	Straight 12.0 mm	Straight THR 14.5 mm
Item no. standard		Z5.540.3825.0	Z5.530.3825.0	Z5.529.0825.0	Z5.530.0804.0
		Soldered pin Ø 1.3 mm	Soldered pin Ø 1.3 mm	Soldered pin Ø 1.3 mm	Soldered pin Ø 1.3 mm
Item no. standard		Z5.540.0825.0	Z5.542.3825.0	Z5.530.3825.0	
		Soldered pin Ø 1.0 mm	Soldered pin Ø 1.0 mm	Soldered pin Ø 1.0 mm	

1) Rated voltage for overvoltage category III / pollution degree 2

2) Plug connectors are available in different lengths

Connection types


Screw connection
with wire protection




Screw connection
with rising cage clamp

Edge connectors

Edge connectors


3.5 mm PITCH

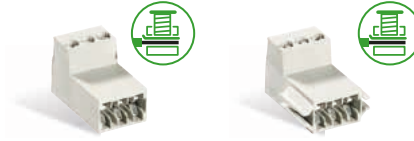

		DST 85	DST LF85
Item no. standard		25.003.0353.0	25.005.0353.0
mm ² / AWG (fine-stranded)		0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14
Current	A IEC/UL/CSA	6 / 6 / 6	6 / 6 / 6
Voltage ¹⁾	V IEC/UL/CSA	250 / 300 / 300	250 / 300 / 300

Edge connectors

5.0 mm PITCH

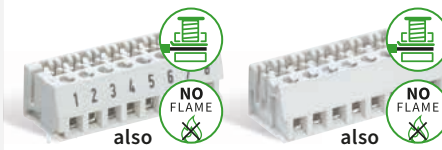

		LPST L 1	LPST 1
Item no. standard		25.001.0856.0	25.010.0856.0
		With solder pin	Without solder pin
mm ² / AWG (fine-stranded)		0.14 - 2.5 / 22 - 14	0.14 - 2.5 / 22 - 14
Current	A IEC/UL/CSA	5 / 5 / 5	5 / 5 / 5
Voltage ¹⁾	V IEC/UL/CSA	690 / 300 / 300	690 / 300 / 300



Tape on reel packaging



No Flame Material



RAST 5 TERMINALS.

Standardized products with “pitch connection plug technology” in 5 mm pitch.

The Wieland 8105 series offers a wide variety of codings, colors and printing and sets the quality standard on the market. The available materials fulfill standard requirements as well as those of DIN EN 60335-1.

FEATURES

- Conductor cross-sections from 0.14 mm² to 4 mm²
- For currents up to 10 A and voltages up to 400 V
- With screw connection
- Can be arranged without loss of poles

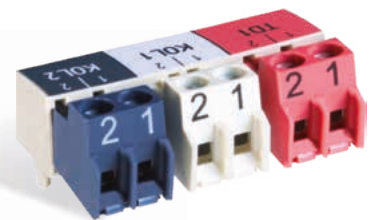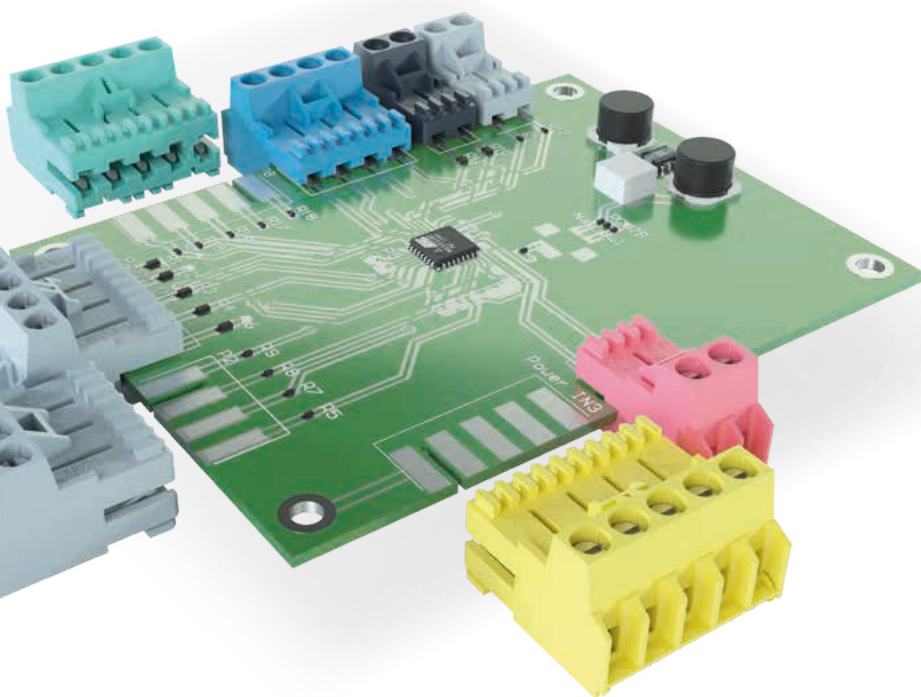


BENEFITS

- + High number of coding possibilities (see page 36)
- + Standard in the heating industry
- + Clear assignment thanks to colored insulating housings
- + With the use of No Flame parts, the requirements of DIN EN 60335-1 are fulfilled without limitations
- + Wide variety and many possibilities for customization

2.5 mm² socket contact


5.0 mm
PITCH

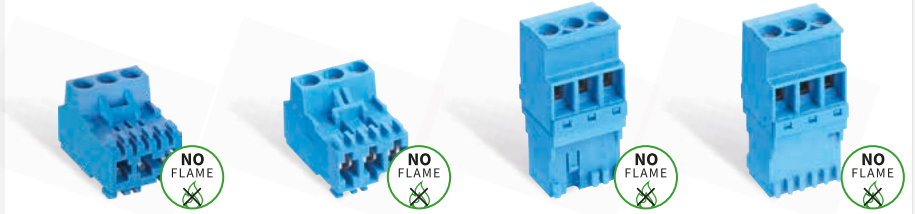

	8105 DST	8105 B	8105 B VR	8105 B VL
Item No.	99.342.0000.0	15.000.0357.2	15.020.0357.2	15.010.0357.2
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12
Current A	IEC/UL/CSA 6 / - / - Approvals pending	10 / 10 / 10	10 / 10 / 10	10 / 10 / 10
Voltage ¹⁾ V	IEC/UL/CSA 400 / - / - Approvals pending	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300

2.5 mm² socket contact


5.0 mm
PITCH

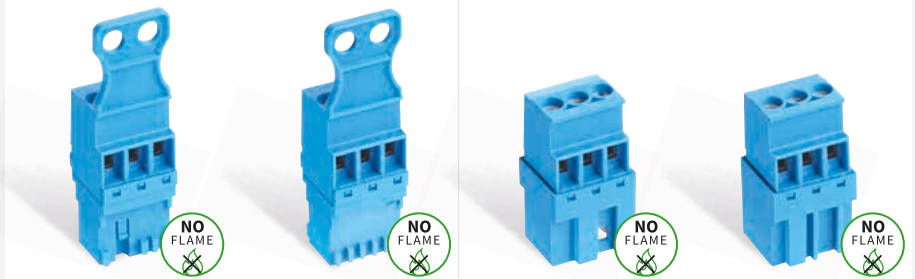

	8105 B VRA	8105 B VLA	8105 FU VR	8105 FU VL
Item No.	15.040.0357.2	15.030.0357.2	15.421.0357.2	15.411.0357.2
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12
Current A	IEC/UL/CSA 10 / 10 / 10	10 / 10 / 10	10 / 10 / 10	10 / 10 / 10
Voltage ¹⁾ V	IEC/UL/CSA 400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300

2.5 mm² tab contact

5.0 mm
PITCH

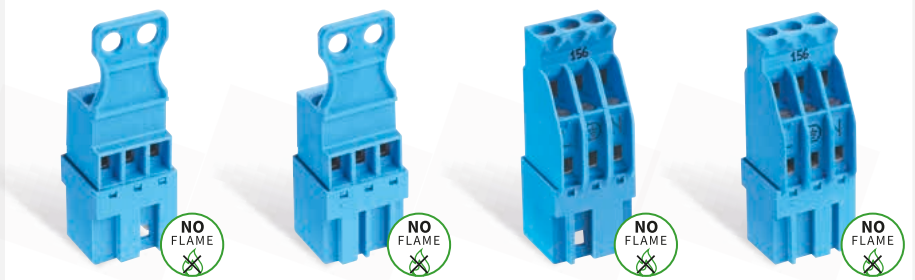

	8105 FU VRA	8105 FU VLA	8105 FUE VR	8105 FUE VL
Item No.	15.441.0357.2	15.431.0357.2	15.521.0357.1	15.511.0357.1
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12	0.14 - 2.5 / 26 - 12
Current A	IEC/UL/CSA 10 / 10 / 10	10 / 10 / 10	10 / 10 / 10	10 / 10 / 10
Voltage ¹⁾ V	IEC/UL/CSA 400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	400 / 300 / 300

2.5 mm² tab contact



Important for your order:

The Wieland numbering system: **No Flame** parts can be distinguished using the last but one place of the part number, for example **15.000.035x.***

- 3 = Standard material
- 7 = No Flame material according to standard DIN EN60335-1
- 3 = 3-pole


PRINTED CIRCUIT BOARD TERMINALS.

Universal connection technology for the highest current and voltage requirements in all applications.

Secure connection, high quality, economical solution!
The simple PCB terminal block is available in a wide number of variants and is characterized by high contact reliability.

FEATURES

- Cross-sections from 0.14 mm² to 16 mm²
- For currents up to 12 A and voltages up to 1000 V
- Connection technology in screw, spring and push-in connection
- Pitches 2.5 mm – 10.16 mm
- THR products and No Flame variants available
- Female connectors can be arranged in a pitch
- Integrated test point

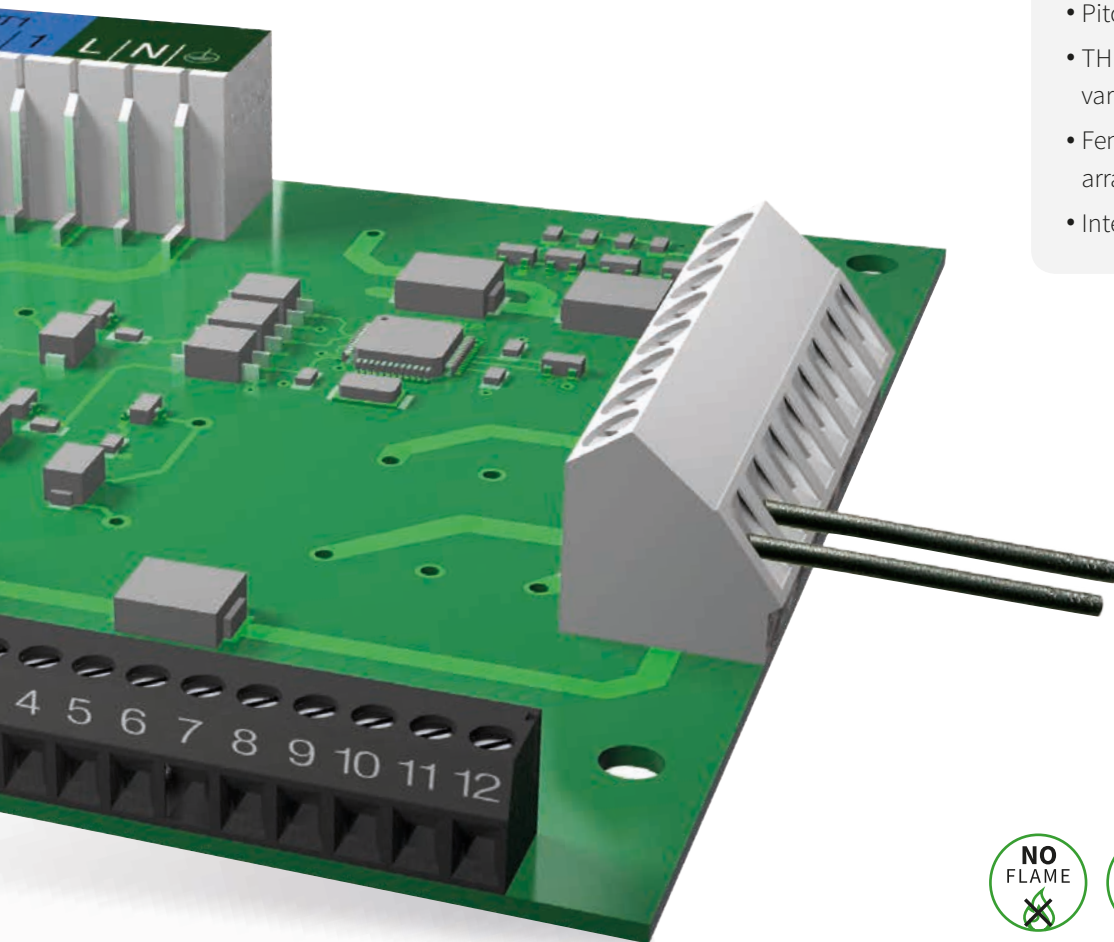

BENEFITS

- + Secure connection and low contact resistance
- + Universal application and easily available
- + Space-saving since only one component is required for conductor connection

Screw connection with rising cage clamp
Push-in connection

2.5 mm PITCH


Item No.		
mm ² / AWG (fine-stranded)		
Current A	VDE/cURus	
Voltage ¹⁾ V	VDE/cURus	

1 mm²

7060 SMD

25.400.3210.1
0.32 - 0.75 / 22 - 18
9 / 7
320 / 150

3.81 mm PITCH

1 mm²

8893

Item No.	25.197.0853.0	
mm ² / AWG (fine-stranded)	0.14 - 1.0 / 30 - 16	
Current A	IEC/UL/CSA 10 / 10 / 10	
Voltage ¹⁾ V	IEC/UL/CSA 250 / 300 / 300	

5.0 mm PITCH

1.5 mm²

8192

8192 E


8192 ZW

8134
45°

Item No.	25.191.0553.0	25.198.5553.0	25.191.6353.0	25.501.0853.0	25.151.0853.0
mm ² / AWG (fine-stranded)	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.5 - 1.0 / 30 - 14
Current A	IEC/UL/CSA 10 / 15 / 15	10 / 15 / 15	10 / 15 / 15	10 / 15 / 15	10 / 15 / 15
Voltage ¹⁾ V	IEC/UL/CSA 690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

5.0 mm PITCH

2.5 mm²

8191 R

8191

8191 E

8191 D

Item No.	25.155.0853.0	25.161.0853.0	25.178.5353.0	25.180.5653.0	25.151.0853.0
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
Current A	IEC/UL/CSA 16 / 20 / 25	16 / 20 / 25	16 / 20 / 25	16 / 20 / 25	16 / 20 / 25
Voltage ¹⁾ V	IEC/UL/CSA 690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

5.08 mm PITCH

1.5 mm²

8292

8292 E

8292 ZW

8234
45°

Item No.	25.193.0853.0	25.199.5353.0	25.193.6553.0	25.503.0353.0	27.000.0353.0
mm ² / AWG (fine-stranded)	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.14 - 1.5 / 30 - 14	0.5 - 1.0 / 30 - 14
Current A	IEC/UL/CSA 10 / 15 / 15	10 / 15 / 15	10 / 15 / 15	10 / 15 / 15	15 / 15 / 15
Voltage ¹⁾ V	IEC/UL/CSA 690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	250 / 300 / 300

3.5 mm PITCH

1 mm²



also

	8593	8593 THR
Item No.	25.195.0853.0	25.195.0206.0
mm ² / AWG (fine-stranded)	0.14 - 1.0 / 30 - 16	0.14 - 1.0 / 30 - 16
Current A	10 / 10 / 10	10 / 10 / 10 ²⁾
Voltage ¹⁾ V	250 / 300 / 300	250 / 300 / 300

Push-in connection

1.5 mm²



	8562 TOP H	8562 TOP N
Item No.	25.400.4353.0	25.400.6353.0
mm ² / AWG (fine-stranded)	0.14 - 0.75 / 20 - 16	0.5 - 1.5 / 20 - 16
Current A	4 / 4 / 4	4 / 15 / 10
Voltage ¹⁾ V	250 / 300 / 300	250 / 300 / 600

* END PLATE



AP 8185 TOP N

Item No. 07.300.4753.0
Please order for all items marked with *.

Tension spring connection

mm²



	D/VB1	8195 V/VB1
Item No.	3.6653.0	25.154.6653.0
mm ² / AWG (fine-stranded)	0.5 / 30 - 14; PE 0.5 - 2.5 / 20 - 12	0.5 - 1.5 / 30 - 14; PE 0.5 - 2.5 / 20 - 12
Current A	10 / 10	10 / 10 / 10
Voltage ¹⁾ V	300 / 300	690 / 300 / 300

2.5 mm²



	8158 TOP V	8158 TOP H	8191 FK
Item No.	25.780.0653.0	25.790.0653.0	27.007.3253.0
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.08 - 2.5 / 28 - 12
Current A	16 / 20 / 20	16 / 20 / 20	16 / 15 / 15
Voltage ¹⁾ V	690 / 300 / 300	690 / 300 / 300	250 / 300 / 300

	81 ZW	8185 TOP V	8185 TOP H	8135	8190	8190 E
Item No.	25.61.6253.0	25.741.0653.0 *	25.741.3453.0 *	25.521.0653.0	25.131.0253.0	25.131.3353.0
mm ² / AWG (fine-stranded)	0.5 - 2.5 / 22 - 12	0.5 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.5 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 14
Current A	16 / 20 / 25	16 / 20 / 20	16 / 20 / 20	16 / 20 / 25	16 / 15 / 10	16 / 15 / 10
Voltage ¹⁾ V	300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

2.5 mm²



	822 H	8292 EH	8292 DH	8291	8291 E	8291 D
Item No.	25.000.0353.0	27.000.2253.0	27.000.4253.0	25.163.0353.0	25.179.5353.0	25.181.5353.0
mm ² / AWG (fine-stranded)	0.5 - 1.5 / 24 - 14	0.5 - 1.5 / 24 - 14	0.5 - 1.5 / 24 - 14	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
Current A	15 / 10 / 10	15 / 10 / 10	15 / 10 / 10	16 / 20 / 25	16 / 20 / 25	16 / 20 / 25
Voltage ¹⁾ V	300 / 300	250 / 300 / 300	250 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

Screw connection with rising cage clamp

2.5 mm²

**5.08 mm
PITCH**



	8291 ZW	8291 R	8285 TOP V	8285 TOP H	8235
Item No.	25.163.6353.0	25.156.0653.0	25.751.0853.0*	25.751.3353.0*	25.523.0853.0
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.5 - 2.5 / 22 - 12	0.5 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
Current A	16 / 20 / 25	16 / 20 / 25	16 / 20 / 20	16 / 20 / 20	16 / 20 / 20
Voltage ¹⁾ V	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300

4 mm²

**5.08 mm
PITCH**



	7386 TOP H
Item No.	27.714.0353.0
mm ² / AWG (fine-stranded)	0.5 - 4 / 22 - 10
Current A	36 / 30 / 30
Voltage ¹⁾ V	320 / 300 / 300

2.5 mm²

**7.5 mm
PITCH**



	8391	8391 ZW	8385 TOP V	8385 TOP H	8390
Item No.	25.165.0353.0	25.165.6253.0	25.761.0653.0*	25.761.3353.0*	25.151.0353.0
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
Current A	16 / 20 / 25	16 / 20 / 25	16 / 20 / 20	16 / 20 / 20	16 / 15 / 15
Voltage ¹⁾ V	1000 / 300 / 300	1000 / 300 / 300	1000 / 300 / 300	1000 / 300 / 300	1000 / 300 / 300

2.5 mm²

**7.62 mm
PITCH**



	8491	8491 ZW	8485 TOP V	8485 TOP H	8486 TOP H
Item No.	25.167.0353.0	25.167.6453.0	25.771.0653.0*	25.771.3253.0*	27.703.0453.0
mm ² / AWG (fine-stranded)	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12	0.5 - 4 / 22 - 10
Current A	16 / 20 / 25	16 / 20 / 25	16 / 20 / 20	16 / 20 / 20	36 / 30 / 30
Voltage ¹⁾ V	1000 / 300 / 300	1000 / 300 / 300	1000 / 300 / 300	1000 / 300 / 300	500 / 300 / 300



10 mm²

**10.16 mm
PITCH**





	7572 L2	7572 L4	7573 L2../W
Item No.	27.002.2253.0	27.002.0253.0	27.002.6153.0
mm ² / AWG (fine-stranded)	0.5 - 10 / 22 - 8	0.5 - 10 / 22 - 8	0.5 - 10 / 26 - 8
Current A	76 / 65 / 65	76 / 65 / 65	59 / 40 / 40
Voltage ¹⁾ V	690 / 300 / 300	690 / 300 / 300	690 / 300 / 300





	Disconnect terminal		Fuse terminal
 <p>45° also </p>	8276	8276 TKS	8276 Si-D
25.720.1353.0	25.720.1353.0	25.720.1453.0	25.720.1653.0
0.14 - 2.5 / 30 - 14	0.14 - 2.5 / 30 - 14	0.14 - 2.5 / 30 - 14	0.14 - 2.5 / 30 - 14
26 / 15 / 20	26 / 15 / 20	15 / 15 / 20	6,3 / 6,3 / 6,3
400 / 300 / 300	400 / 300 / 300	400 / 300 / 300	690 / 300 / 300



Tension spring connection

2.5 mm²



	
8258 TOP V	8258 TOP H
25.781.0353.0	25.791.0653.0
0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
16 / 20 / 20	16 / 20 / 20
690 / 300 / 300	690 / 300 / 300




2.5 mm²

	
8291 EFK	8291 DFK
27.008.3453.0	27.009.3253.0
0.08 - 2.5 / 28 - 12	0.08 - 2.5 / 28 - 12
12 / 10 / 10	12 / 10 / 10
250 / 300 / 300	250 / 300 / 300



4 mm ²	
	
8375	
25.700.0253.0	25.700.0253.0
0.14 - 4 / 22 - 10	0.14 - 4 / 22 - 10
30 / 30 / 30	30 / 30 / 30
1000 / 300 / 300	1000 / 300 / 300

2.5 mm²

	
8358 TOP V	8358 TOP H
25.782.0353.0	25.792.0453.0
0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
16 / 20 / 20	16 / 20 / 20
1000 / 300 / 300	1000 / 300 / 300

6 mm ²		
		
8486 TOP V	8486 TOP H	8474
27.713.0253.0	27.713.0253.0	27.011.3253.0
0.5 - 4 / 22 - 10	0.5 - 4 / 22 - 10	0.5 - 6 / 20 - 10
36 / 30 / 30	36 / 30 / 30	16 / 30 / 30
500 / 300 / 300	500 / 300 / 300	250 / 300 / 300

2.5 mm²

	
8458 TOP V	8458 TOP H
25.783.0453.0	25.793.0453.0
0.14 - 2.5 / 22 - 12	0.14 - 2.5 / 22 - 12
16 / 20 / 20	16 / 20 / 20
1000 / 300 / 300	1000 / 300 / 300



Tape on reel packaging



No Flame Material

*END PLATE




AP 8185 TOP N

Item No.

07.300.4753.0

Please order for all items marked with *.

OVERVIEW **BENEFITS.**

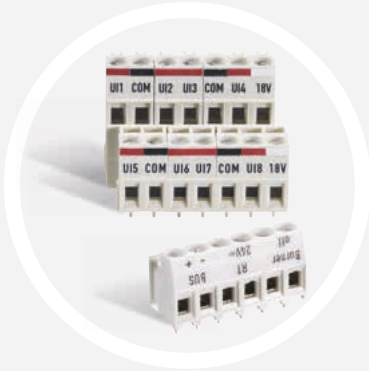

Individual markings

Printing in tampoprint or ink-jet processes, also multi-colored




Compact geometry

Best possible use of the terminal space according to the DIN size



Process-optimized packaging

Components in box packaging, tape-on-reel or tray appropriate for your process

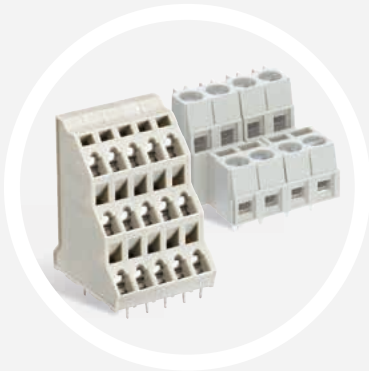


Multi-level variants

Make space thanks to high packaging and connection density



Distinguishable by color

Large number of available color variants

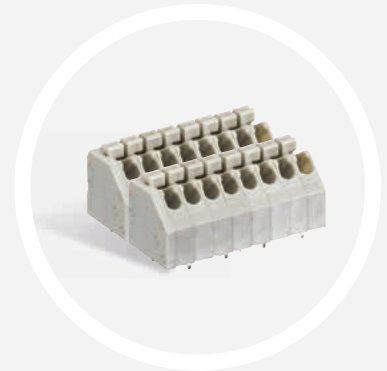


Space-saving placement

45° connector outlet allows the placement of clamp on clamp in several rows



Individual clamp fitting

Pre-assembled jumpers, empty poles, closed clamping space, your choice

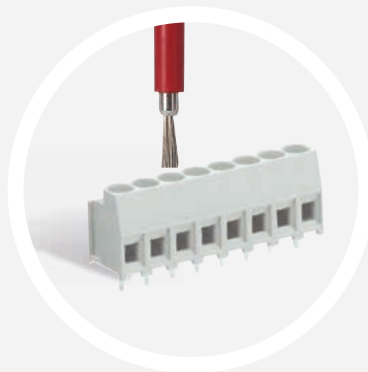

Integrated test points


Direct access to voltage-conducting parts with standard test plugs

WIECON®FSC SUPER-FAST **SIGNAL** DISTRIBUTION.

With the FSC system you save time and space with signal cabling in the distribution boxes. Thanks to the integrated signal distribution with and without electronics, the completely pluggable system can be adapted individually to customer needs. Cable screw fittings are a thing of the past. Coding prevents any mismatching. Installation is so easy and safe that no trained personnel are required.

FEATURES

- + Mistaken connections are impossible
- + 30 % space savings
- + Installation-ready delivery
- + 80 % less assembly time
- + Minimal preparatory work – only a sheet metal cut-out is required

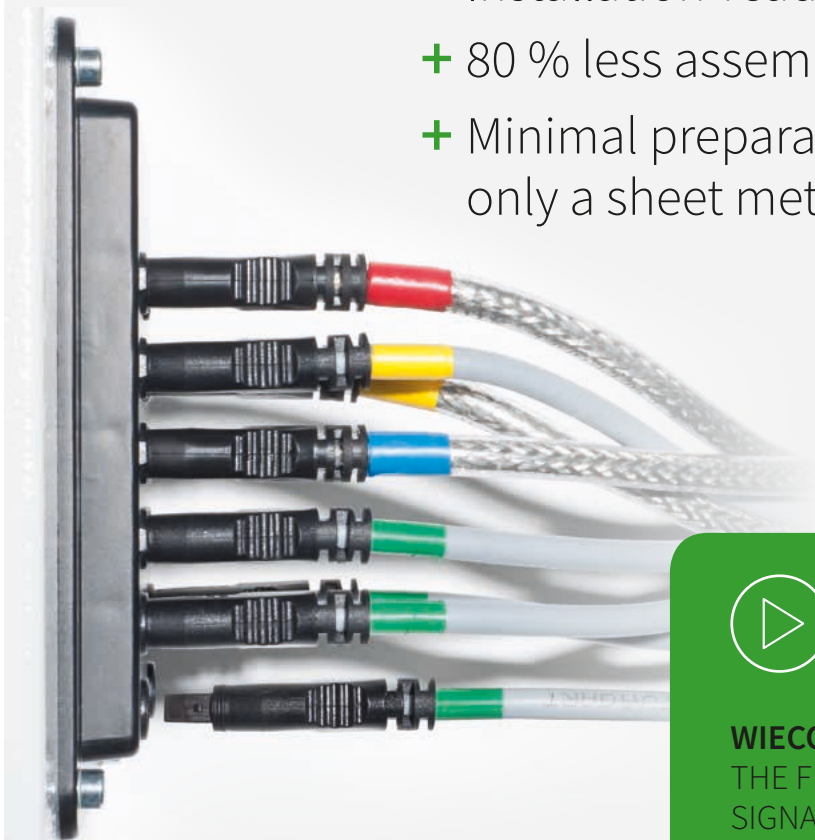

WIECON® FSC ON YouTube
THE FUTURE OF
SIGNAL WIRING.

Scan the QR code –
Experience the future live.






+ Plug contour can be adopted in your plastic housing



NO MORE INCONVENIENCE

- Reduction in distribution box size
- Plugging instead of wiring
- No specialists required for plugging the external wiring
- Replaceable, maintenance-friendly components
- Distribution box entry, signal distribution & electronics in one product

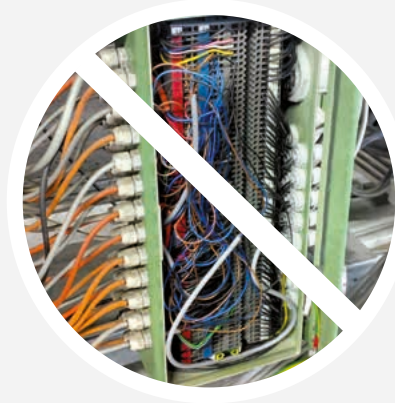

PATCH CABLE | Y-CABLE

- 32 coding options
- Extruded cable to the desired length
- 3 to 6-pole
- Cable shield applied to pole
- Cable and coding 100 % checked
- Cross sections 0.14 mm² - 1 mm²
- Cable marking with text/color



TECHNICAL DATA

- Nominal voltage 24 V DC, nominal current 3 A
- IP54 protection class
- 10/12 slots (more upon request)
- UL and CSA approvals
- Article numbers available upon request



DOMESTIC APPLIANCES STANDARD.

For the safety of electrical products for domestic use and industrial purposes.

DIN EN/IEC 60335-1

This standard standardizes the safety of electrical appliances for household use and commercial purposes, the rated voltage of which does not exceed 250 V for single-phase appliances and 480 V for other appliances. In chapter 30: "Heat and fire resistance," the topic is discussed in more detail. Affected are parts of non-metallic materials, which keep active parts (e.g. connection elements) in their position. These must be resistant to ignition and the spread of fire. These fire resistance requirements should prevent unattended devices from igniting themselves. On the market, this designation is called "No Flame." It applies for manufacturers of electric and electronic household components as well as for appliances in medium-sized operations.



KITCHEN APPLIANCES

- ▶ Dishwashers
- ▶ Ranges, stovetops, ovens
- ▶ Food processors

HOME & GARDEN

- ▶ Hot water boilers and hot water cylinders
- ▶ Gas, oil and solid fuel appliances with electrical connections

OTHER HOUSEHOLD CONNECTIONS

- ▶ Dryers
- ▶ Room heaters, such as radiant heaters, electric stoves
- ▶ Electrically-operated heat pumps, air conditioners and room air dehumidifiers

APPLIANCES USED OUTDOORS

- ▶ Pumps
- ▶ Electric product dispensing machines such as beverage, food and ticket vending machines
- ▶ Industry & trade
- ▶ Circulation pumps for heating and process water systems

GENERAL

- ▶ Thermal storage heaters
- ▶ Air cleaning or air handling products, humidifiers
- ▶ Fans



DATA + FACTS ON **NO** FLAME.

We are an experienced, expert partner for pluggable electronic installations and connection technology. Service to the customer and the quality of our products are core elements of our organizational philosophy. **As a company with a strong sense of responsibility, we see it as an obligation to our customers to point out the following:**

Our connection systems and terminal blocks ensure **simple, fast and safe** installation. They are type-tested and certified according to the standards

IEC 61535,
IEC 61984
IEC 60947-7...
DIN EN 60998
DIN EN 60999

and according to the current status of the standards. This pertains to the classical pluggable electrical installation just as much as to the use as connection components in machines and other electrical devices.

For the use of connectors in operating equipment subject to **DIN EN 60335-1** ("Safety of household and similar electrical appliances"), Section 30, "Heat and fire resistance", must be referred to for evaluation of fire hazards. Especially for components used in appliances which are operated unattended and conduct a current of >0.2 amperes during normal operation, according to section 30.2.3 of this standard, there are more stringent conditions within the range of 3 millimeters around the live electrical parts.

Many of the parts in our catalog fulfill these requirements, either through the use of materials of **fire class V-0 or V-1**, or by verification of **needle-flame testing according to IEC 60695-11-5**.

If there are additional, non-metallic materials within a defined cylindrical surrounding of 20 mm diameter and 50 mm height from the live connections, these components must also fulfill the above criteria. We would be happy to assist you with selection of the suitable catalog product.

As an alternative, we offer our customers a specific order number-group for ordering "No Flame" products. This is not a release from the obligation of the standard, to evaluate the surroundings within a distance of 3 mm to the support of live parts.

AN EXAMPLE OF A PRINTED CIRCUIT BOARD PLUG CONNECTOR

Standard part number
25.320.045**3.2**



No Flame part number
25.320.045**7.2**

For this purpose, we employ special plastics which have successfully undergone a glow wire test, either as test plates according to GWIT (Glow Wire Ignition Temperature) or as the component itself regarding GWT (Glow Wire Test). Corresponding VDE verification is available.

Please note that not all colors of the standard product are available as "No Flame" material and in individual cases, color deviations may occur.



MATRIX CODINGS

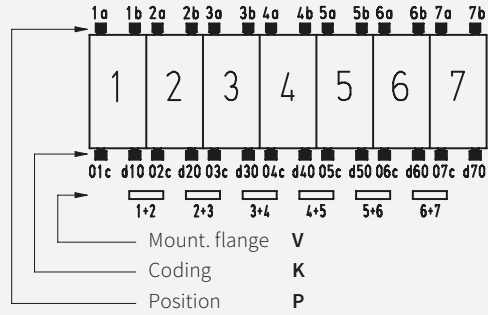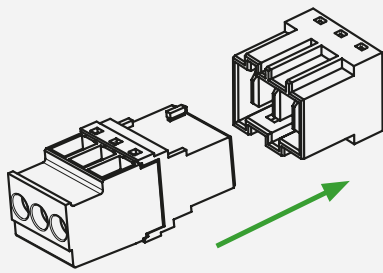


Number of poles		2		3		4		5		6		7	
Coding													
C1	Position	1 2	1b,2a	1 2 3	1b	1 2 3 4	1b						
	Coding		01c,d20		01c,d20		03c,d40						
	Mount. flange		1+2		1+2		1+2,3+4						
C2	Position		1a,2b	1 2 3	1b,3a		1a,4b						
	Coding		01c		01c		01c						
	Mount. flange		1+2		1+2		1+2,3+4						
C3	Position		2a	1 2 3	1a		1a,4b	1 2 3 4 5	5b	1 2 3 4 5 6	1a		
	Coding		01c,d20		03c		d40		d30		d30,d60		
	Mount. flange		1+2		1+2		1+2,3+4		1+2		1+2,5+6		
C4	Position		1a,1b		1a,1b		1a,3a						
	Coding		01c		d30		d23c						
	Mount. flange		1+2		1+2		1+2,3+4						
C5	Position	1 2	1a,2b		1a,3b		1a,3a					1 2 3 4 5 6 7	3a,5a
	Coding		d20		01c		d40						d10,d40,d50
	Mount. flange		1+2		1+2		1+2,3+4						2+3,6+7
C6	Position		1a,2b		1a,3a		2a,4b						
	Coding		-		01c		d20						
	Mount. flange		1+2		1+2		1+2,3+4						
C7	Position		1a,2a,2b		2b	1 2 3 4	1b,4b						
	Coding		d20		d20		01c						
	Mount. flange		1+2		1+2		1+2,3+4						
C8	Position	1 2	2a,2b	1 2 3	2b,3b	1 2 3 4	1b,4b						
	Coding		d20		d12c		d40						
	Mount. flange		1+2		2+3		1+2,3+4						
C9	Position	1 2	1b,2b	1 2 3	1a,1b	1 2 3 4	1b,3b						
	Coding		d20		-		02c,d40						
	Mount. flange		1+2		1+2		3+4						
C10	Position	1 2	1b,2a	1 2 3	3a	1 2 3 4	2a,4a						
	Coding		d20		02c,d30		01c,d40						
	Mount. flange		1+2		2+3		3+4						
C11	Position	1 2	1a,2a	1 2 3	1a,3b	1 2 3 4	2a,4a						
	Coding		d20		01c,d10,d30		01c,d30						
	Mount. flange		1+2		2+3		2+3						
C12	Position	1 2	1a,1b	1 2 3	2a,3b	1 2 3 4	4a						
	Coding		d20		d12c		02c						
	Mount. flange		1+2		2+3		3+4						
C13	Position	1 2	1a	1 2 3	1b,3b	1 2 3 4	1b,3b						
	Coding		-		d12c		02c,d40						
	Mount. flange		1+2		2+3		2+3						
C14	Position			1 2 3	1a,3b								
	Coding				d12c								
	Mount. flange				2+3								
C15	Position			1 2 3	2a,3b								
	Coding				d10								
	Mount. flange				2+3								

COMBINATION POSSIBILITIES



Products from Wieland Electric and Stocko complement each other perfectly and can be combined with one another.

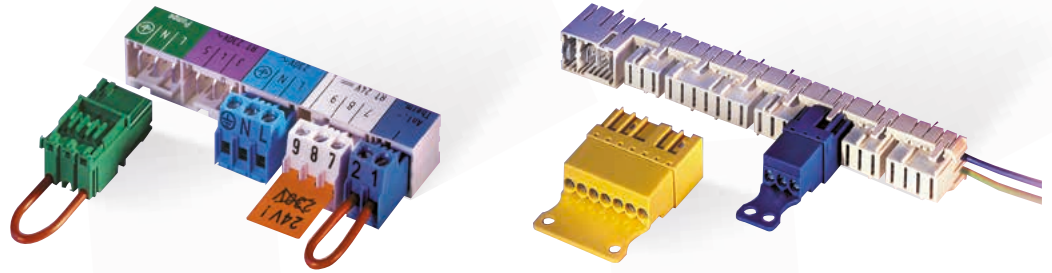

	MS 9401 to MS 9406, MS 9481 (SMD) *) Fig. MS 9401	MS 9411 to MS 9415 *) Fig. MS 9412	MS 9421 to MS 9424 *) Fig. MS 9421	MF 9431 to MF 9434 *) Fig. MF 9431	MSF 9441 to MSF 9444 *) Fig. MSF 9441

*) Customer-specific pin connectors, for details please contact the STOCKO Contact company
www.stocko-contact.com, E-Mail: info@stocko-contact.com, Phone: +49 202 9733-0



SMART SERVICING + SERVICES.

Wiecon is always service-oriented. Assembly of connection lines and individual printing are among our core competencies.

We will be happy to assist you in customizing your project – just ask us.



FLEXIBLE WITHOUT LIMITS

On request, we will provide products for special requirements, e.g. requested colors, with special printing, with special contact fittings or completely assembled cables.

- Numerous color variants
- Special printing
- Customer-specific assembled cables
- Special markings, codings and pin lengths
- Fitted circuit boards



KNOW-HOW + COMPETENCE

We offer you comprehensive development and production expertise for individual solutions – from the initial idea to series production.

- 3D print patterns
- FEM calculations
- Modified fastening types
- Additional activation possibilities



SERVICE + SUPPORT


Our motto is customer satisfaction, therefore, we always strive to make all information and products available to you as easily as possible.

- Easy download of 3D data from the eShop
- Quick item selection with the criteria selector in the eShop
- You will find printed product overviews, for a quick overview even without Internet access in this brochure



CUSTOMIZED SOLUTIONS

We offer you customized cable assemblies/cable sets with a wide variety of components, which we combine at your request.

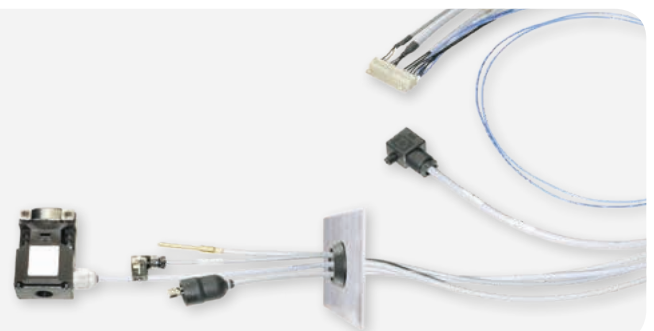



INFO TO GO.



OUR WIELAND BROCHURE SERVICE

To make your workflow easier, we provide all of our product catalogs and industry brochures for you in the download area of our website.

<https://www.wieland-electric.com/en/download>

Further information and a product overview is available here:



WIECON® CATALOG

PCB terminals
and plug connectors
Art. No. 0550.1



WIECON® 8142 ZP

Compact rising cage terminals
for machines + plants.
Art. No. 0552.1



WIECON® PUSH-IN

PCB terminals for
appliances + light applications.
Art. No. 0553.1



WIECON® RAST 5

Printed circuit board connectors
for applications in HVAC.
Art. No. 0570.1



WIELAND ON YOUTUBE
FIND OUT MORE ABOUT
OUR PRODUCTS



<https://www.youtube.com/user/WielandElectric>



TECHNICAL ADVICE

PRINTED CIRCUIT BOARD TERMINALS

Phone: +49 951 9324-991

E-mail: AT.TS@wieland-electric.com



ONLY ONE TIP AWAY.

OUR WIELAND E-SHOP

EVERY PRODUCT - ANY TIME

In our online store you will find
all the information about our products,
prices, and technical data.

Order easily and conveniently online,
and check availability.

<https://eshop.wieland-electric.com>

Scan QR code –
view products in the
E-SHOP.





wieland

HEADQUARTERS

Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg · Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com

0580.1 C 02/19

Represented in over 70 countries worldwide:

www.wieland-electric.com