



wienet

INDUSTRIAL **AUTOMATION**

Easy remote access to machines and systems,
machine data collection and machine operation.

HELLO WIELAND ELECTRIC


Tradition and innovation - Wieland is representing the synergy of these two guiding principles for more than 100 years.

At Wieland Electric, we are proud to be the world market leader in electrical connections, and have been focusing on safe and innovative technologies since our founding. The beginnings of our success lie in the legendary Wieland Clamp, the first-ever safe electrical connector. Since then, innovation has pushed us to develop safer and more efficient ways to electrify the world.

Expanding from a component-only manufacturer, we are now one of the leading suppliers of innovative, future-oriented, and complete electrical solutions. We divide our focus into two main areas, Building and Industry. Our Building Solutions focus on decentralized power distribution and pluggable connections in all kinds of architectures and infrastructures. From in-store displays and lighting to hospitals and airports, and any structure in between – you build it, we power it! Our Industry Solutions center around functional safety for machines, industrial networking (IIoT and VPN), and power distribution. At Wieland, we keep your productivity going in mechanical engineering, wind power, material handling, thermo-processing, HVAC, and many other industries.

We are at our customers' side in every step of the project, right from the start. Our experts offer consulting, on-site services, and technical support. We see ourselves as service providers, trainers and subject-matter experts.


1910
Founded in
Bamberg



1600+
Employees
worldwide


6
Production
sites


70+
Countries
worldwide

CONTENTS

04	Ready for digitisation – secure connection to the Internet
06	Automation solutions for your machines + plants
08	Security router ordering overview
10	VPN + CLOUD + IIoT ordering overview
12	I/O fieldbus system ordering overview
14	Touch panels + serial servers ordering overview
16	wienet Security Router
24	Remote maintenance and/or IIoT
26	Remote maintenance VPN portal
30	CLOUD in machine building
32	wienet CLOUD IIoT CLOUD SERVICES
34	IIoT starter kit – for your easy entry into the IIoT
36	wienet IoT gateways
38	Compact I/O fieldbus system
40	ricos FLEX I/O fieldbus system
48	Touch panels
50	Easy configuration – hmi PLAN
52	Touch panels with customer-specific design
54	wienet hmi touch panels
56	wienet serial device servers
60	Accessories
62	Information and contact

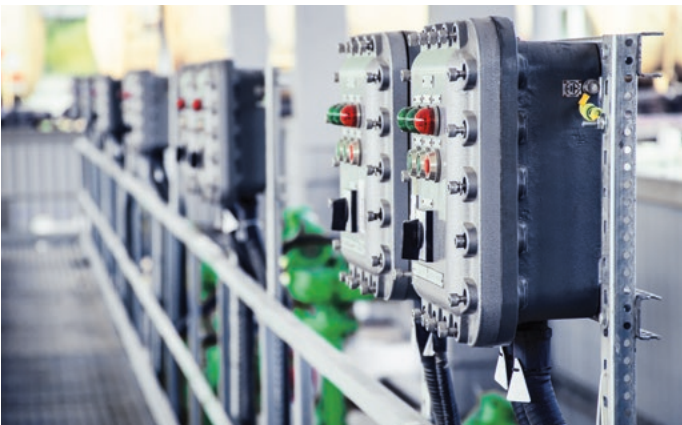

READY FOR **DIGITISATION** – SECURE CONNECTION TO THE INTERNET.

The global deployment of machines makes worldwide communication with machines more and more important to avoid costly service work on site. In addition, modern production technology requires networks that are able to exchange data between a wide variety of processes and machines. With the communication solutions from Wieland Electric, you lay the foundation for this, enabling remote access to your automation devices at any time, no matter where you are.

Today it is essential to collect machine and system data in order to be able to be competitive in the market. Only this makes predictive maintenance possible and ensures you can continuously improve your machines and systems. Our wienet IoT solutions and the wienet CLOUD put you in the position to do this. On site, our I/O systems and the operating HMI provide best control, directly at the source of the data.

PRODUCTS FOR:

- + MACHINE BUILDING
- + WATER AND WASTE
WATER MANAGEMENT
- + PROCESS INDUSTRY
- + BUILDING AUTOMATION
- + E-MOBILITY
- + TRAFFIC INFRA-
STRUCTURE
- + VIDEO MONITORING
- + SMART GRID
- + WIND POWER PLANTS
- + CHARGING STATIONS





AUTOMATION SOLUTIONS FOR YOUR MACHINES + PLANTS.



VPN-ROUTERS

When remote access to your machines and plants is required, encrypted VPN connections are the answer.

Security VPN routers enable secure and encrypted remote access to all devices in your machine network.

The VPN portal WIE-Service24 is the command center for this and manages all your VPN connections.



IIoT GATEWAYS AND WIENET CLOUD

In the era of Industry 4.0 and the Industrial Internet of Things (IIoT), the collection, evaluation and visualization of machine and device data is essential. Only these prerequisites make predictive maintenance, machine learning or the development of AI solutions possible. The IIoT gateways bundle the data and send them to the CLOUD-based data base systems for further processing.



FIELD CONNECTION WITH REMOTE I/O

Distributed I/O systems are still the state of the art to connect sensor data to a control layer or to bring control commands into the field and, together with the IIoT gateways, provide you with a complete control platform. Of course, the I/Os can also be connected to other control systems with standard fieldbus protocols.



MACHINE OPERATION USING HMI

Touch panels are today used in many machines and systems for the visualization, operation, and diagnosis. By transferring the user habits from the consumer world into the automation world, the HMI ECO series has been especially developed for industrial requirements and needs. Make the machine the flagship of your company with your own logo on the operating unit.



SERIAL SERVERS

You are using devices with serial interfaces, but without an Ethernet interface and would still like to connect these devices to the network. Then the serial device servers form the gateway between serial and Ethernet communication, with you being able to connect to the LAN or WLAN network.



SWITCHES

Reliable and highly available machine communication is the basis for the reliable operation of your machine. Choose unmanaged switches to simply network devices, protocol switches for the integration into your automation environment or fully managed switches for full control in the network.

For further information on this topic, we recommend the reference on page 63 to our catalog wienet Switches - Securely networked, order no. 0801.1

WIENET SECURITY ROUTER

INDUSTRIAL MOBILE ROUTER WR-LTE V3



Type	Art. No.
wienet WR-LTE v3 SL	83.041.0700.1
wienet WR-LTE v3 SL 5-port	83.041.0709.1
wienet WR-LTE v3 SL 5-port WIFI	83.041.0769.1

INDUSTRIAL MOBILE ROUTER 4G LTE V2



Type	Art. No.
wienet LR77 SLv2 ETH	83.041.0055.1
wienet LR77 SLv2	83.041.0050.1
wienet LR77v2f SL	83.041.0500.1
wienet LR77 v2c SL ETH	83.041.0505.3
wienet LR77 v2c SL ETH WIFI	83.041.0565.3

INDUSTRIAL MOBILE ROUTER 3G UMTS V2



Type	Art. No.
wienet UR5i SLv2	83.041.0040.1
wienet UR5i SLv2 ETH	83.041.0045.1
wienet UR5iv2f SL	83.041.0400.1
wienet UR5i v2c SL ETH	83.041.0405.3
wienet UR5i v2c SL ETH WIFI	83.041.0465.3

INDUSTRIAL LAN ROUTER XR5I + WR-LAN



Type	Art. No.
wienet XR5iv2f SL ETH	83.041.0605.1
wienet XR5i v2c SL ETH	83.041.0605.3
wienet XR5i v2c SL ETH WIFI	83.041.0665.3
wienet WR-LAN v3 SL 5-port	83.041.0809.1
wienet WR-LAN v3 SL 5-port WIFI	83.041.0869.1

Interfaces	Antenna ports	Dimensions W x H x D (mm)
2x LAN, USB, 2DI, 1DO, 2x SIM	ANT, DIV, GPS	55 x 125 x 97
5x LAN, USB, 2DI, 1DO, 2x SIM	ANT, DIV, GPS	55 x 125 x 97
5x LAN, USB, 2DI, 1DO, 2x SIM, WIFI	ANT, DIV, GPS, WIFI	55 x 125 x 97

Interfaces	Antenna ports	Dimensions W x H x D (mm)
2x LAN, USB, DI, DO, 1x SIM	ANT, DIV	42 x 113.5 x 80.5
LAN, USB, DI, DO, 1x SIM	ANT, DIV	42 x 113.5 x 80.5
LAN, USB, DI, DO, 2x SIM	ANT, DIV	42 x 113.5 x 80.5
2x LAN, 2x SIM	ANT, DIV	42 x 113.5 x 80.5
2x LAN, 2x SIM, WIFI	ANT, DIV, WIFI	42 x 113.5 x 80.5

Interfaces	Antenna ports	Dimensions W x H x D (mm)
LAN, USB, DI, DO, 1x SIM	ANT, DIV	42 x 113.5 x 80.5
2x LAN, USB, DI, DO, 1x SIM	ANT, DIV	42 x 113.5 x 80.5
LAN, USB, DI, DO, 2x SIM	ANT, DIV	42 x 113.5 x 80.5
2x LAN, 2x SIM	ANT, DIV	42 x 113.5 x 80.5
2x LAN, 2x SIM, WIFI	ANT, DIV, WIFI	42 x 113.5 x 80.5

Interfaces	Antenna ports	Dimensions W x H x D (mm)
2x LAN, USB, DI, DO	-	42 x 113.5 x 80.5
2x LAN	-	42 x 113.5 x 80.5
2x LAN, WIFI	WIFI	42 x 113.5 x 80.5
5x LAN, USB, DI, DO	-	55 x 125 x 97
5x LAN, USB, DI, DO, WIFI	WIFI	55 x 125 x 97

WIENET VPN + CLOUD + IIoT

VPN SERVICES




Type	Art. No.
wienet VPN V3 - single VPN license	ZD.000.0020.5
wienet VPN V3 - 10 VPN licenses	ZD.000.0021.5
wienet VPN V3 - 25 VPN licenses	ZD.000.0022.5
wienet VPN V3 - 50 VPN licenses	ZD.000.0023.5
wienet VPN V3 - 100 VPN licenses	ZD.000.0024.5

CLOUD SERVICES



Type	Art. No.
wienet CLOUD project registration	ZD.000.0040.0
wienet CLOUD IoT gateway registration	ZD.000.0041.0
wienet CLOUD IoT gateway Data flat Month	ZD.000.0042.5
wienet CLOUD SMS fee	ZD.000.0043.0

IIoT STARTER KITS

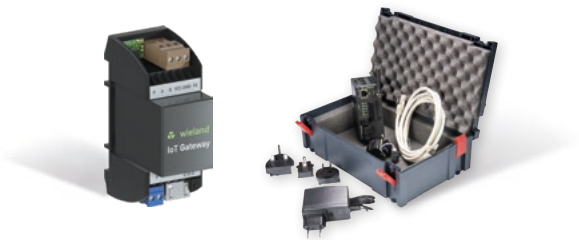

Type	Art. No.
wienet IoT SK 115-W	83.041.1000.0
wienet IoT SK 100-DIO8-3G-W	83.041.1011.0

IIoT GATEWAYS



Type	Art. No.
wienet IoT GW 115-W	83.041.1100.0
wienet IoT GW 100-PB-W	83.041.1280.0
wienet IoT GW 100-PN-W	83.041.1250.0
wienet IoT GW 100-EIP-W	83.041.1260.0
wienet IoT GW 100-DIO8-W	83.041.1210.0

IIoT MODEM GATEWAYS



Type	Art. No.
wienet IoT GW 100-PN-3G-W	83.041.1251.0
wienet IoT GW 100-PN-WIFI-W	83.041.1252.0
wienet IoT GW 100-EIP-3G-W	83.041.1261.0
wienet IoT GW 100-EIP-WIFI-W	83.041.1262.0
wienet IoT GW 100-DIO8-3G	83.041.1211.0
wienet IoT GW 100-DIO8-WIFI-W	83.041.1212.0

Service description

VPN client single license for router, IoT gateway, PC or mobile device
10 VPN client licenses for router, IoT gateway, PC or mobile device
25 VPN client licenses for router, IoT gateway, PC or mobile device
50 VPN client licenses for router, IoT gateway, PC or mobile device
100 VPN client licenses for router, IoT gateway, PC or mobile device

Page
26

Service description

Setting up a project in the wienet CLOUD portal
Registration of an IoT gateway in the wienet CLOUD portal
Monthly data flat rate in the wienet CLOUD portal
Costs per SMS from the wienet CLOUD portal

Page
30

Scope of kit

GW 115-W serial gateway, WEB-PLC programming, free use of the wienet CLOUD portal for one year.
GW 100-DI08-3G-W I/O gateway, antenna, power supply, Ethernet cable, input simulator, WEB-PLC programming, free use of the wienet CLOUD portal for one year

Page
35

Number of ports

Dimensions W x H x D (mm)

1x RS485, 2x 10/100BaseT	37 x 97 x 62
1x Profibus, USB, MICRO SD, 1x RS232/RS485, 1x 10/100BaseT	46 x 105 x 78
2x ProfiNet, USB, MICRO SD, 1x RS232/RS485, 1x 10/100BaseT	46 x 105 x 78
2x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485, 1x 10/100BaseT	46 x 105 x 78
1x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485, 1x 10/100BaseT	46 x 105 x 78

Page
36

Number of ports

Modem

Dimensions W x H x D (mm)

2x ProfiNet, USB, MICRO SD, 1x RS232/RS485	3G UMTS	46 x 105 x 78
2x ProfiNet, USB, MICRO SD, 1x RS232/RS485	WLAN	46 x 105 x 78
2x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485	3G UMTS	46 x 105 x 78
2x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485	WLAN	46 x 105 x 78
1x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485, 8 digital inputs/outputs	3G UMTS	46 x 105 x 78
1x EtherNet/IP, USB, MICRO SD, 1x RS232/RS485, 8 digital inputs/outputs	WLAN	46 x 105 x 78

Page
37

RICOS FLEX

FIELD BUS COUPLER



Type	Art. No.
ricos FLEX BC DP	83.036.1000.1
ricos FLEX BC MODBUS	83.036.1040.0
ricos FLEX BC PROFINET	83.036.1010.1
ricos FLEX BC EtherNet/IP	83.036.1050.0
ricos FLEX BC EtherCAT	83.036.1060.0

POTENTIAL DISTRIBUTION BLOCK + POWERMODULE



Type	Art. No.
ricos FLEX PV 8xDC24V	83.036.0000.0
ricos FLEX PV 8xDC0V	83.036.0010.0
ricos FLEX PV 4xDC24V 4DC0V	83.036.0020.0
ricos FLEX PW DC 24V	83.036.0030.0

DIGITAL INPUTS + OUTPUTS



Type	Art. No.	Extension
ricos FLEX 8xDI DC24V	83.036.2300.0	Digital input
ricos FLEX 4xDO DC24V 0,5A	83.036.3200.0	Digital output
ricos FLEX 8xDO DC24V 0,5A	83.036.3300.0	Digital output

ANALOG INPUTS + OUTPUTS



Type	Art. No.	Extension
ricos FLEX 4xAI 12BIT 0...10V	83.036.4200.0	Analog input
ricos FLEX 4xAI 12BIT 0(4)...20mA	83.036.4224.0	Analog input
ricos FLEX 4xAI 16BIT R,RTD	83.036.4261.0	Analog input
ricos FLEX 4xAO 12BIT 0...10V	83.036.5200.0	Analog output
ricos FLEX 4xAO 12BIT 0(4)...20mA	83.036.5220.0	Analog output

Fieldbus	Connection	Dimensions W x H x D (mm)
Profibus DP	9-pol Sub-D-female	48.5 x 109 x 76.5
Modbus TCP	RJ45 / Ethernet 10/100 Mbit	48.5 x 109 x 76.5
PROFINET IO	2 x RJ45 / Ethernet 100 Mbit	48.5 x 109 x 76.5
EtherNet/IP	RJ45 / Ethernet 100 Mbit	48.5 x 109 x 76.5
EtherCAT	2 x RJ45 / Ethernet 100 Mbit	48.5 x 109 x 76.5

Page
42

Extension module	Number of terminals	Output voltage/current	Dimensions W x H x D (mm)
Potential distribution block	8 x 24 V DC	-	12.9 x 109 x 52.5
Potential distribution block	8 x 0 V DC	-	12.9 x 109 x 52.5
Potential distribution block	4 x 24 V DC; 4 x 0 V DC	-	12.9 x 109 x 52.5
Power module	-	24 V / 10 A	12.9 x 109 x 76.5

Page
44

Module	Number of interfaces	Voltage	Electricity	Dimensions W x H x D (mm)
Input	8 binary inputs	24 V DC	-	12.9 x 109 x 76.5
Output	4 outputs	24 V DC	0.5 A	12.9 x 109 x 76.5
Output	8 outputs	24 V DC	0.5 A	12.9 x 109 x 76.5

Page
45

Module	Number of interfaces	Resolution	Measuring range	Dimensions W x H x D (mm)
Input	4 inputs	12 BIT	0 ... 10 V	12.9 x 109 x 76.5
Input	4 inputs	12 BIT	0 (4) ... 20 mA	12.9 x 109 x 76.5
Input	4 inputs	16 BIT	RTD, PT100	12.9 x 109 x 76.5
Output	4 outputs	12 BIT	0 ... 10 V	12.9 x 109 x 76.5
Output	4 outputs	12 BIT	0 (4) ... 20 mA	12.9 x 109 x 76.5

Page
46

WIENET HMI ECO TOUCH PANELS



Type	Art. No.
HMI-ECO-043	83.050.0000.0
HMI-ECO-070	83.050.0001.0
HMI-ECO-100	83.050.0002.0
HMI-ECO-120	83.050.0003.0
HMI-ECO-150	83.050.0004.0

ACCESSORIES


Type	Art. No.
HMI-LICENSE-SINGLE	ZW.000.0170.0
SP-CABLE-ETH1	R1.190.1020.0

WIENET SERIAL SERVER



Type	Art. No.
wienet SDS-DB	83.040.0500.0
wienet SDS-TB	83.040.0501.0
wienet SDS-DB KIT	83.040.0502.0
wienet SDS-TB KIT	83.040.0503.0
wienet WSDS 1 COM DB TB	83.040.0510.0

ACCESSORIES

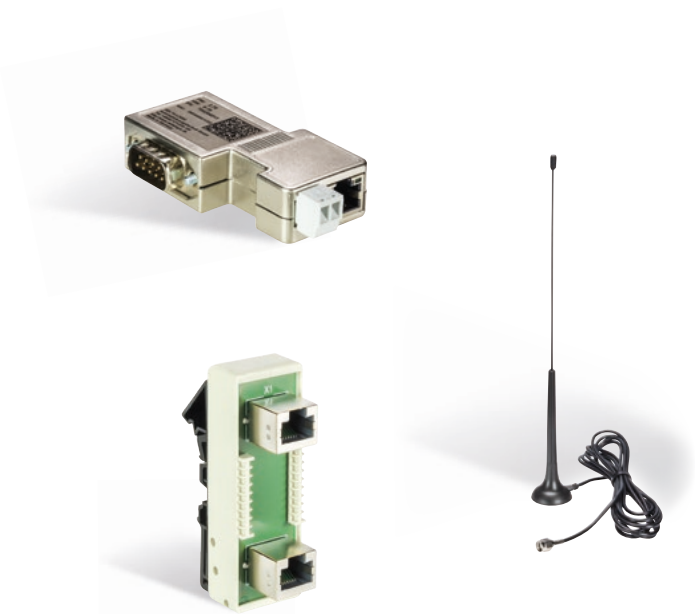

Type	Art. No.
MPI-ETH ADAPTER ACCON-NETLINK-PRO	F0.000.0031.8
wienet ANTENNA GXR623	83.041.0200.0
wienet ANTENNA GXR606	83.041.0210.0
wienet ANTENNA 15863V2 ROOF ANT.	F0.000.0035.1
wienet ANTENNA 15018 MAGNETIC HOLDER	F0.000.0036.1
wienet ANTENNA 150181V2 ANTENNA ROD	F0.000.0036.2
wienet PS 12V 15094 12V POWER SUPPLY V2	F0.000.0037.3
wienet ANTENNA 15854 WIFI MAGNET ANT.	F0.000.0037.4
wienet ANTENNA 15874V2 WIFI ROOF ANT.	F0.000.0037.5
wienet ANTENNA 15862V2 PANEL ANT.	F0.000.0037.6
wienet PS 12V 15094 12V POWER SUPPLY V3	F0.000.0037.7
wienet ANTENNA 15872V2 PANEL ANT.	F0.000.0037.8
wienet I/O CABLE 15096V3 1M	F0.000.0037.9
wienet I/O CABLE 15096V3 3M	F0.000.0038.0
wienet RJ45 8S Terminal	80.000.3001.0
wienet RJ45 extender	80.000.3002.0
wienet VPN ACC WR-RS232	F0.000.0049.7
wienet VPN ACC WR-RS422/485	F0.000.0049.8
wienet VPN ACC WR-IO	F0.000.0049.9
wienet VPN ACC WR-ETH	F0.000.0050.0
wienet PATCH-CABLES MOD ZBH RJ45	78.999.4x00.0

Monitor size in inch	Resolution in pixels	Dimensions W x H x D (mm)
4.3	480 x 272	129 x 103 x 33
7	800 x 480	203.5 x 148 x 37
10	1024 x 600	270.8 x 212.8 x 42.5
12	1024 x 768	335.4 x 245.8 x 58.2
15	1024 x 768	399.1 x 267.6 x 57.5

Page
54

Description

Single-user license for **hmi** PLAN programming software
Ethernet programming cable, 2 m

Page
55

10/100 RJ45 LAN ports	WLAN	Serial interface	Installation	Dimensions W x H x D (mm)
1	-	1x D-Sub	Screws	65 x 78 x 28
1	-	1x terminal block	Screws	65 x 78 x 28
1	-	1x D-Sub	DIN top hat rail	88.5 x 78 x 28
1	-	1x terminal block	DIN top hat rail	88.5 x 78 x 28
1	Yes	1x D-Sub or terminal blocks	DIN top hat rail	47 x 110 x 90

Page
58

Description

Programming adapter for Siemens controllers from MPI/Profibus to Ethernet
Mobile network antenna 2G, 3G, flat design, suitable for outdoor installation
Mobile radio antenna 2G, 3G, round beam rod antenna, suitable for outdoor installation
Mobile radio antenna 2G, 3G, 4G roof antenna, suitable for outdoor installation
Magnetic holder for mobile radio antennas
Mobile radio antenna 2G, 3G, 4G for installation on magnetic holder
Switching power supply 230 V AC / 12 V DC suitable for v2 routers
WIFI antenna with magnetic holder
WIFI antenna, roof antenna
Mobile radio antenna, panel antenna 2G, 3G, 4G, powerful (+5dBi) LTE antenna
Switching power supply 230 V AC / 12 V DC with preassembled plug for v3 routers
Mobile radio antenna, panel antenna 2G, 3G, 4G, powerful (+9dBi) LTE antenna
Preassembled connection cables 1 m, for connecting the I/Os with the v3 router
Preassembled connection cables 3 m, for connecting the I/Os with the v3 router
CAT.5 interface module push-in connection clamps to RJ-45 socket
CAT.5 interface module RJ-45 socket to RJ-45 socket
VPN router v2 - extension module RS232
VPN router v2 - extension module RS422/485
VPN router v2 - extension module 4xDI (2x with counter function), 2x AI (4-20mA), 1x DO
VPN router v2 - extension module additional Ethernet port
Patch-cables RJ45, different lengths (x = m see chart)

Page
60

WIENET SECURITY ROUTER

Remote access to local networks is the communication basis for almost any Industry 4.0 or IoT application.

With wienet security routers and the VPN server portal WIE-Service24, machines and devices are securely connected to the Internet and the encrypted transfer of data via VPN is ensured.



- + Direct connection of terminal devices via local Ethernet network or serial interface
- + Remote access with original manufacturer software without additional programs
- + Access to the Internet via LAN, mobile radio or WLAN
- + Secure data connection thanks to latest encryption technology
- + Reliable transfer of alarms via SMS or e-mail



PERFORMANCE FEATURES

- + Internet connection
 - + Mobile radio standards
 - + VPN protocols
 - + Operating temperature
- LAN-LAN, WLAN, mobile communications
UMTS 3G, LTE 4G
open VPN, IpSec, L2TP, GRE (PPTP, easyVPN)
-30 °C to +60 °C



CE E8

WIENET – EASY REMOTE MAINTENANCE.

One of the top goals of any machine builder today is the ability for remote maintenance of machines and systems. This reduces maintenance costs drastically and optimizes machine availability for the customers. The wienet Security VPN routers have been specially designed for the easy remote maintenance of machines and installations at customer locations or satellite stations using the Internet. This means, that OEMs and system integrators can troubleshoot machines with remote maintenance without the need for them being on site.



REMOTE ACCESS USING SECURE VPN CONNECTIONS

The Security VPN routers from Wieland enable the secure access to machines and systems by using encrypted VPN connections, supporting the standard VPN technologies OpenVPN and IPsec. Up to four VPN channels can be operated simultaneously.

The interaction with the VPN server portal WIE-Service24 v3 has been optimized for VPN operation.




CONTROLLING AND MONITORING THE VPN CONNECTIONS

All wienet VPN routers (except the compact models) have digital inputs and outputs. With one input, for example, the VPN connection can be controlled via an PLC output or with a key switch. The digital output can be used as a switching output or status output. The VPN mobile routers can be controlled with SMS commands.



WEB-BASED USER INTERFACE

All wienet VPN routers are configured with a web-based user interface. This means that it can be operated with any standard browser without the need for installing extra software.

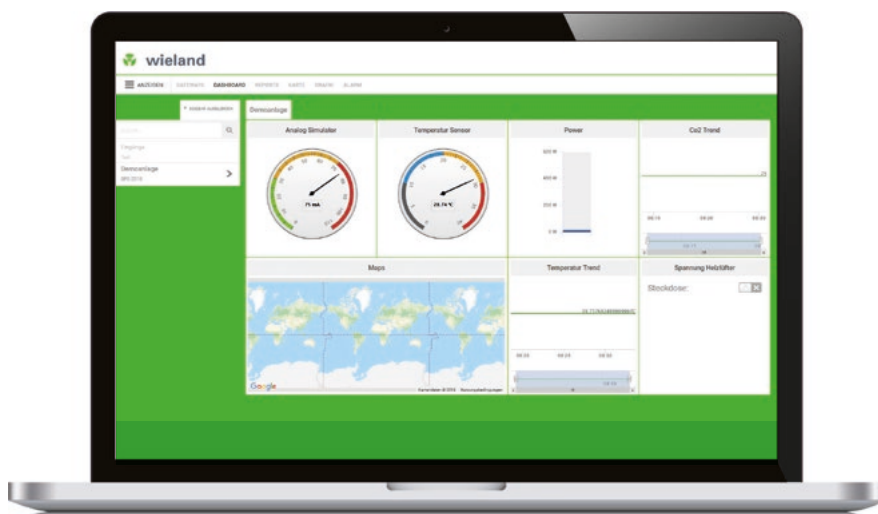

VERSATILE APPLICATIONS:

- **Energy supply**
Wind turbines, solar farms, transformer stations, combined heat and power units, biogas cogeneration systems, heat pumps, ...
- **Water and waste water management**
- **System monitoring in machine building**
Washing systems, compressors, packaging machines, ...
- **External surveillance camera**
- **Vending**
Online telemetry of sales or ticket vending machines
- **Mobile fleet management**
- **Smart metering**



READY-BUILT USER MODULES FOR EVEN MORE FUNCTIONS.

The functions of the wienet VPN routers can be expanded using preassembled software user modules.

We utilise the experiences we and our customers have gathered in recent years and offer our customers useful applications as free user modules. The user modules expand the user interface, so to say. You do not have to change or implement any program code, but can use the functions at once and very easily.

EXAMPLES FOR USER MODULES:

- + Azure IoT SDK Python
- + Node-RED
- + Node-RED FTP Node
- + Node-RED MQTT Node
- + Diverse protocol converters
- + Layer2 Firewall
- + Modbus Logger



Please contact our wienet Service-Center netcom@wieland-electric.com for the complete list of all available user modules.

INDUSTRIAL MOBILE ROUTERS · WIENET WR-LTE V3

TECHNICAL DATA



Description	wienet WR-LTE v3 SL	wienet WR-LTE v3 SL 5-Port	wienet WR-LTE v3 SL 5-Port WiFi
Art. No.	83.041.0700.1	83.041.0709.1	83.041.0769.1

VPN mobile router interfaces

Ethernet	2x 10/100 Mbit/s	5x 10/100 Mbit/s	5x 10/100 Mbit/s
USB slot	1x USB 2.0 host	1x USB 2.0 host	1x USB 2.0 host
SIM slot	2x mini SIM 2FF	2x mini SIM 2FF	2x mini SIM 2FF
SD slot	1x micro SD	1x micro SD	1x micro SD
Digital inputs	2x DI 10-60 V DC	2x DI 10-60 V DC	2x DI 10-60 V DC
Digital outputs	1x DO 300 mA / max. 60 V	1x DO 300 mA / max. 60 V	1x DO 300 mA / max. 60 V
WiFi/WLAN	-	-	1x WLAN 802.11 b/g/n
Antenna ports	ANT(SMA), DIV (SMA), GPS (SMA)	ANT(SMA), DIV (SMA), GPS (SMA)	ANT(SMA), DIV (SMA), GPS (SMA), WiFi (R-SMA)
LED indication	PWR, USR, DAT, IN0, IN1, OUT, SIM, WAN	PWR, USR, DAT, IN0, IN1, OUT, SIM, WAN	PWR, USR, DAT, IN0, IN1, OUT, SIM, WAN

Technical features

Network connection	LTE	LTE	LTE
Networks	DHCP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, DMVPN, PPPoE Bridge, Dial-In, NTP Client-Server, IGMP, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, DMVPN, PPPoE Bridge, Dial-In, NTP Client-Server, IGMP, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, DMVPN, PPPoE Bridge, Dial-In, NTP Client-Server, IGMP, BGP, OSPF, RIP, SMTP, SMTPS
VPN	open VPN, Ipsec, L2TP, PPTP, GRE, EasyVPN	open VPN, Ipsec, L2TP, PPTP, GRE, EasyVPN	open VPN, Ipsec, L2TP, PPTP, GRE, EasyVPN
Configuration and diagnostics	Web-Interface, SMS, SNMP v1/v2c/v3, Status	Web-Interface, SMS, SNMP v1/v2c/v3, Status	Web-Interface, SMS, SNMP v1/v2c/v3, Status

Technical data

CPU	Cortex A8, 1GHz (2000 DMIPS)	Cortex A8, 1GHz (2000 DMIPS)	Cortex A8, 1GHz (2000 DMIPS)
Memory	256 MB flash memory, 512 MB RAM, 128 KB M-RAM	256 MB flash memory, 512 MB RAM, 128 KB M-RAM	256 MB flash memory, 512 MB RAM, 128 KB M-RAM
Operating voltage min.-max.	10 - 60 V DC	10 - 60 V DC	10 - 60 V DC
Power consumption max.	4 W	4 W	4 W
Operating temperature	-40 °C...+75 °C	-40 °C...+75 °C	-40 °C...+75 °C
Storage temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Rel. humidity during operation min.-max. (non-condensing)	0...95 %	0...95 %	0...95 %

Dimensions

Width (mm)	55	55	55
Height (mm)	125	125	125
Depth (mm)	97	97	97
Weight	approx. 375	approx. 375	approx. 375

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Protection class	IP30
Housing material	Aluminum
RoHs	Yes
Norms and approvals	CE, E8

INDUSTRIAL MOBILE ROUTER · WIENET 4G LTE V2

TECHNICAL DATA



Description	wienet	LR77 SLv2 ETH	LR77 SLv2	LR77v2f SL	LR77 v2c SL ETH	LR77 v2c SL ETH WiFi
Art. No.		83.041.0055.1	83.041.0050.1	83.041.0500.1	83.041.0505.3	83.041.0565.3

VPN mobile router interfaces

Ethernet	2x 10/100 Mbit/s	1x 10/100 Mbit/s	2x 1x 10/100 Mbit/s (LAN-LAN or switch bridge)	2x 1x 10/100 Mbit/s (LAN-LAN or switch bridge)	2x 1x 10/100 Mbit/s (LAN-LAN or switch bridge)
USB slot	1x USB 2.0 Host (type A)	1x USB 2.0 Host (type A)	1x USB 2.0 Host (type A)	-	1x USB 2.0 Host (type A)
SIM slot	1	1	2	2	2
Digital inputs	1x DI 10-30 V DC	1x DI 10-30 V DC	1x DI 10-30 V DC	-	-
Digital outputs	1x DO 120 mA / max. 30 V	1x DO 120 mA / max. 30 V	1x DO 120 mA / max. 30 V	-	-
WiFi/WLAN	-	-	-	-	1x WLAN 802.11 b/g/n
Antenna ports	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA) WIFI (1x R-SMA)
LED indication	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT	PWR, WAN, DAT

Technical features

Network connection	LTE 4G	LTE 4G	LTE 4G	LTE 4G	LTE 4G
Networks	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS
VPN	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE
Configuration and diagnostics	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status
Port expansion cards		- 1x ETH - 4x DI, 1DO, 1AI - RS232 - RS422/485	- 1x ETH - 4x DI, 1DO, 1AI - RS232 - RS422/485		

Technical data

Operating voltage min.-max.	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC
Power consumption max.	5.5 W	5.5 W	5.5 W	5.5 W	5.5 W
Operating temperature	-30 °C...+60 °C	-30 °C...+60 °C	-30 °C...+60 °C	-30 °C...+60 °C	-30 °C...+60 °C
Storage temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Rel. humidity during operation min.-max. (non-condensing)	0...95 %	0...95 %	0...95 %	0...95 %	0...95 %

Dimensions

Width (mm)	42	42	42	42	42
Height (mm)	113.5	113.5	113.5	113.5	113.5
Depth (mm)	80.5	80.5	80.5	80.5	80.5
Weight	approx. 270	approx. 270	approx. 270	approx. 270	approx. 270

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Protection class	IP20
Housing material	Aluminum
RoHs	Yes
Norms and approvals	CE, E8

INDUSTRIAL MOBILE ROUTER · WIENET 3G UMTS

TECHNICAL DATA



Description	wienet	UR5i SLv2	UR5i SLv2 ETH	UR5iv2f SL	UR5i v2c SL ETH	UR5i v2c SL ETH WIFI
Art. No.		83.041.0040.1	83.041.0045.1	83.041.0400.1	83.041.0405.3	83.041.0465.3

VPN mobile router interfaces

Ethernet	1x 10/100 Mbit/s	2x 10/100 Mbit/s	1x 10/100 Mbit/s	2x 10/100 Mbit/s	2x 10/100 Mbit/s
USB slot	1x USB 2.0 Host (type A)	1x USB 2.0 Host (type A)	1x USB 2.0 Host (type A)	-	-
SIM slot	1	1	2	2	2
Digital inputs	1x DI 10-30 V DC	1x DI 10-30 V DC	1x DI 10-30 V DC	-	-
Digital outputs	1x DO 120 mA / max. 30 V	1x DO 120 mA / max. 30 V	1x DO 120 mA / max. 30 V	-	-
WiFi/WLAN	-	-	-	-	1x WLAN 802.11 b/g/n
Antenna ports	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA)	ANT, DIV (2x SMA) WIFI (R-SMA)
LED indication	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT, DI, DO, USR	PWR, WAN, DAT	PWR, WAN, DAT

Technical features

Network connection	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+
Networks	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS
VPN	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE
Configuration and diagnostics	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status
Port expansion cards	- 1xETH - 4xDI, 1DO, 1AI - RS232 - RS422/485	- 1xETH - 4xDI, 1DO, 1AI - RS232 - RS422/485	(2 slots) - 1xETH - 4xDI, 1DO, 1AI - RS232 - RS422/485		

Technical data

Operating voltage min.-max.	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC
Power consumption max.	5.5 W	5.5 W	5.5 W	5.5 W	5.5 W
Operating temperature	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C
Storage temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Rel. humidity during operation min.-max. (non-condensing)	0...95 %	0...95 %	0...95 %	0...95 %	0...95 %

Dimensions

Width (mm)	42	42	42	42	42
Height (mm)	113.5	113.5	113.5	113.5	113.5
Depth (mm)	80.5	80.5	80.5	80.5	80.5
Weight	approx. 287 g	approx. 287 g	approx. 287 g	approx. 287 g	approx. 287 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Protection class	IP20
Housing material	Aluminum
RoHs	Yes
Norms and approvals	CE, E8

INDUSTRIAL LAN ROUTER · WIENET XR5I + WR-LAN

TECHNICAL DATA



Description	wienet	XR5iv2f SL ETH	XR5i v2c SL ETH	XR5i v2c SL ETH WIFI	WR-LAN v3 SL 5-Port	WR-LANv3SL5-PortWIFI
Art. No.		83.041.0605.1	83.041.0605.3	83.041.0665.3	83.041.0809.1	83.041.0869.1

VPN LAN router interfaces

Ethernet	2x 10/100 Mbit/s	2x 10/100 Mbit/s	2x 10/100 Mbit/s	5x 10/100 Mbit/s	5x 10/100 Mbit/s
USB slot	1x USB 2.0 Host (type A)	-	-	1x USB 2.0 Host (type A)	1x USB 2.0 Host (type A)
SIM slot	1	1	1	1	1
Digital inputs	1x DI 10 - 30 V DC	-	-	1x DI 10 - 60 V DC	1x DI 10 - 60 V DC
Digital outputs	1x DO 120 mA / max. 30 V	-	-	1x DO 300 mA / max. 60 V	1x DO 300 mA / max. 60 V
WiFi/WLAN	-	-	1x WLAN 802.11 b/g/n	-	1x WLAN 802.11 b/g/n
Antenna ports	-	-	-	-	WIFI (R-SMA)
LED indication	PWR, DI, DO, USR	PWR	PWR	PWR, USR, IN0, IN1, OUT	PWR, USR, IN0, IN1, OUT

Technical features

Network connection	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+	3G, GSM, GPRS, EDGE, UMTS, HSPA+
Networks	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS	DHCP, FTP, NAT, PAT, VRRP, DynDNS Client, VLAN, QoS, PPPoE Bridge, Dial-In, NTP client server, BGP, OSPF, RIP, SMTP, SMTPS
VPN	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE	open VPN, Ipsec, L2TP, GRE
Configuration and diagnostics	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status	Web interface, SMS, e-mail, SSH, SNMP v1/v2c/v3, status
Port expansion cards	- 1xETH - 4xDI, 1DO, 1AI - RS232 - RS422/485				

Technical data

Operating voltage min.-max.	10 - 30 V DC	10 - 30 V DC	10 - 30 V DC	10 - 60 V DC	10 - 60 V DC
Power consumption max.	5.5 W	5.5 W	5.5 W	4.5 W	4.5 W
Operating temperature	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+75 °C	-40 °C...+75 °C
Storage temperature	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C	-40 °C...+85 °C
Rel. humidity during operation min.-max. (non-condensing)	0...95 %	0...95 %	0...95 %	0...95 %	0...95 %

Dimensions

Width (mm)	42	42	42	55	55
Height (mm)	113.5	113.5	113.5	125	125
Depth (mm)	80.5	80.5	80.5	97	97
Weight	approx. 287 g	approx. 287 g	approx. 287 g	approx. 327 g	approx. 327 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Protection class	IP20 / IP30
Housing material	Aluminum
RoHs	Yes
Norms and approvals	CE, E8

VPN SERVER OR IIoT CLOUD

Secure access to your machines and plants – around the globe.



COMPLEXITY



	ONLY VPN REMOTE MAINTENANCE	ONLY IIoT	REMOTE MAINTENANCE AND IIoT
HARDWARE	WIENET VPN ROUTERS	WIENET IIoT GATEWAYS	WIENET IIoT GATEWAYS
PORTAL	WIE-SERVICE24	WIENET CLOUD	WIENET CLOUD (IIoT) + WIE-SERVICE24 (VPN)
APPLICATIONS	SECURE ACCESS TO CONTROLLERS, HMI, DRIVES, ...	DATA COLLECTION, EVALUATION AND VISUALIZATION	BOTH



REMOTE MAINTENANCE VIA WIENET VPN PORTAL.

The wienet VPN portal is the pivotal element where all VPN connections are managed. The VPN connections are based on OpenVPN. The VPN end devices (router, PC, smartphone, IIoT gateways, ...) require a VPN configuration file, which is generated in the wienet VPN portal and made available to the user. After the implementation, the end devices establish an outgoing, encrypted VPN tunnel to the wienet VPN portal. The assignments of who is allowed to communicate with who are also specified in the wienet VPN portal. Users can be created and rights can be assigned in the user management.

FEATURES OF THE WIENET VPN PORTAL



SECURE CONNECTION

The wienet VPN portal ensures the secure connection of your machines and systems: The individual specification of the access rights and encryption of the VPN connections protects your machines and systems. Tedious, error-prone manual router configuration is no longer necessary. Remote access can be accomplished with any Internet-capable PC or smartphone.

The first 30 VPN licenses are free of charge!



THE LICENSE MODEL IN DETAIL

After the test phase with only one or very few VPN end devices, you have up to 30 additional VPN client licenses at your disposal for free, which you can use to let several persons and machines communicate with each other securely using an encrypted VPN connection.

If you require more licenses, additional blocks of VPN clients are allocated to you (upon consultation with your Wieland contact).

Please specify how many additional licenses you need in your order.




TEST ACCESS

The wienet VPN portal can be tested free of charge in connection with the wienet VPN routers.

Please get in touch with your wienet VPN contact at Wieland Electric under netcom@wieland-electric.com or by phone with our Telesales telephone: +49 951 9324-0.

You will be provided with a VPN end device for a limited time + wienet VPN portal access (several VPN end devices on request).

WIE-SERVICE24 APPLICATION

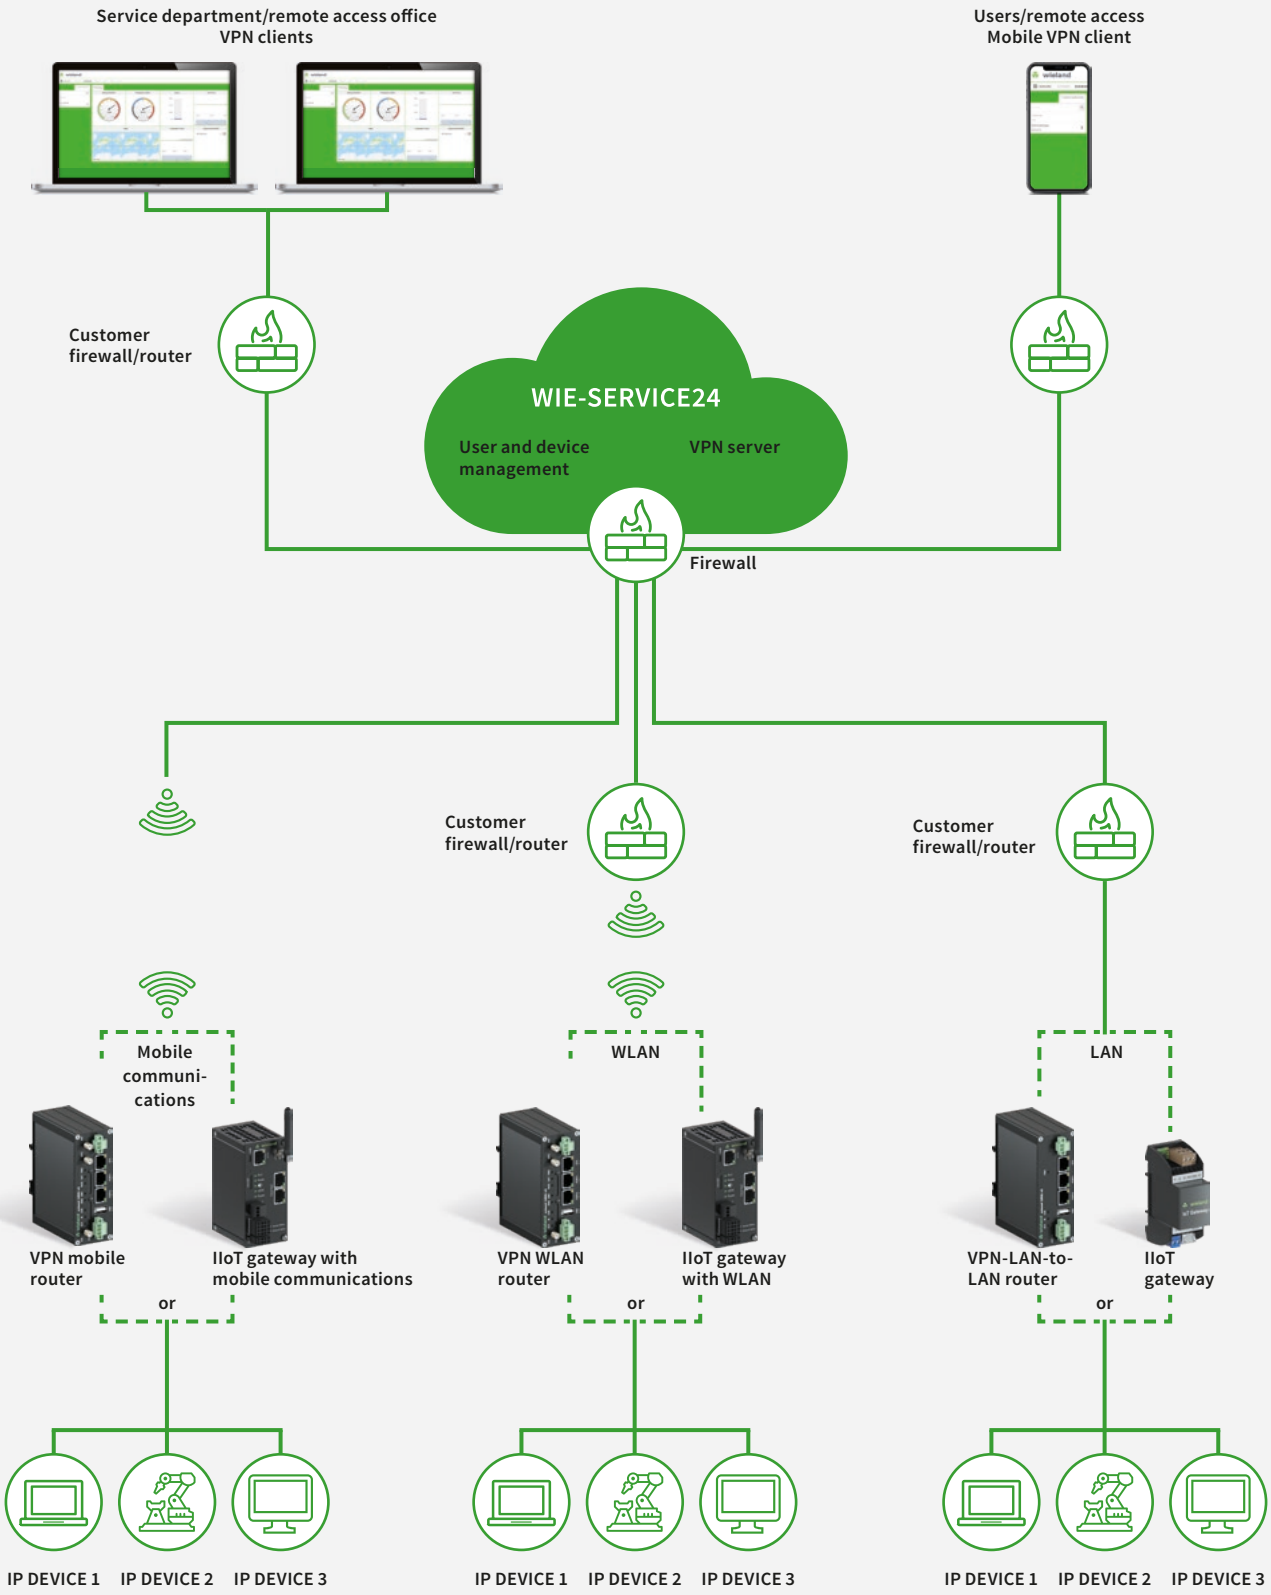

REMOTE MAINTENANCE VIA WIENET VPN PORTAL.

M2M DEVICE MANAGEMENT IN THE CLOUD

Complete systems, machines and networks can be connected to each other with our VPN service portal. The individual specification of the access rights and the encryption of the VPN connections protects your machines and systems.

You set up the authorization management in seconds, individually for each device. The VPN service portal is so easy to use that users do not need in-depth knowledge of networks. WIE-SERVICE24 as one of the first software solutions for VPN service portals is a proven system for remote maintenance and has been undergoing a massive overhaul. User feedback was directly considered in the development of the current version 3.

FEATURES OF THE WIENET VPN SERVER



PERFORMANCE

Intel Skylake Xeon CPUs together with fast NVMe SSDs provide highest performance. High-speed thanks to redundant 10 Gbit network connection.



DAILY BACKUPS

Backups are created daily to ensure the recovery of an environment in case of an unexpected failure.



DDOS PROTECTION

The server is protected from DDoS attacks to the greatest possible extent thanks to comprehensive hardware applications and a complex filtering technology.



DATA PROTECTION

Operation of the cloud-based VPN server conforming to the GDPR.



EASY USER NAVIGATION

Clear, compact interface (with “one-page” feel) enables an easier and more intuitive user operation. Users can, as a brand new feature, create own accesses, which provides enhanced flexibility.



MORE TECH. FEATURES

- Secure networking based on proven and open standards
- 2-factor authentication
- Multi routing (≥ 2 subnets for each VPN tunnel)
- Flexible expansion of an exploited VPN IP address range

ACCESS PERMISSIONS

Access to the complete IP network behind the router is possible from any desktop and tablet computer via the VPN center. This can be complete systems, for example. Routing from one LAN to another LAN (site-to-site VPN) is also possible. This is a skillful workaround to avoid address conflicts during IP configuration in the connected local networks.



Figure: Access permissions

ENHANCED USER MANAGEMENT

The new, enhanced user management is particularly remarkable. In WIE-SERVICE24 v3, customers can for the first time create accounts for their customers and inherit the complete scope of functions. In these cases, users only see their own systems and/or VPN accesses.

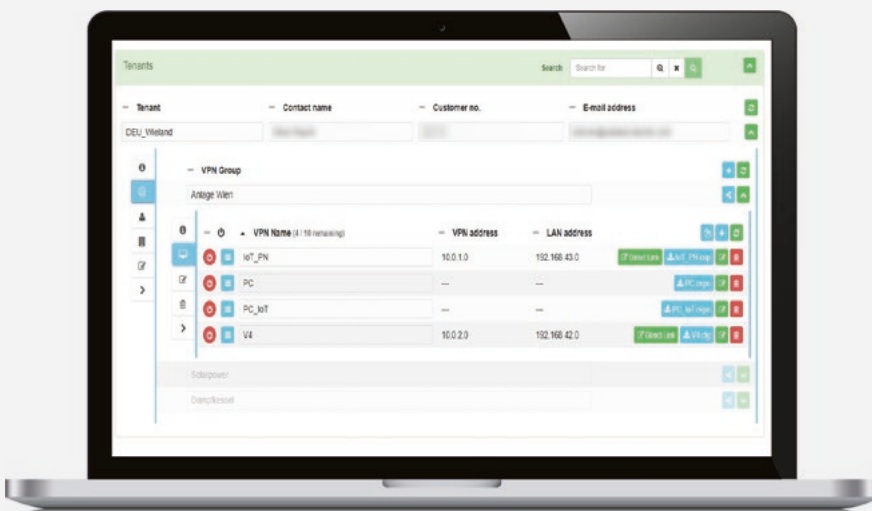


Figure: Simplified user management (one-page design)

WIENET CLOUD IN MACHINE BUILDING

The Internet of Things for industrial applications (IIoT) offers a host of new potentials. Production, energy generation and the transport industry are areas that have already been utilizing the opportunities of IIoT. Successful application cases, for example, are the remote monitoring and control of machines, sensor-controlled supply chains and connected logistics processes or big data-capable diagnosis.

The wienet CLOUD rounds out our comprehensive gateway portfolio to give you all the transformation modules you need. We realize your IIoT applications with a simple modular concept. All the data you need in the cloud are provisioned or retrieved through our wienet CLOUD IIoT gateways.



COMMUNICATION

- Firewall
- Full-duplex communication
- Keep-alive mechanism
- Controllable data volume
- Low latency periods



SAFETY

- End-to-End encryption
- Mandatory authentication
- Password policy
- Structured authorization system

YOUR BENEFIT:

- + Scalable platform
- + No IT consulting needed
- + Worldwide visualization
- + Encrypted data
- + Complete solution and support from a single source



DATA MODEL

- Data types: boolean, integer, floating point, string, byte, array
- Flexible event-trigger configuration
- QoS levels
- Value scaling/formatting
- Storing historical data




OPERATIONS

- Industrial Ethernet Protocol
- Professional hosting
- Scalable virtual data center
- High availability
- Service Level Agreement



WIENET CLOUD APPLICATION

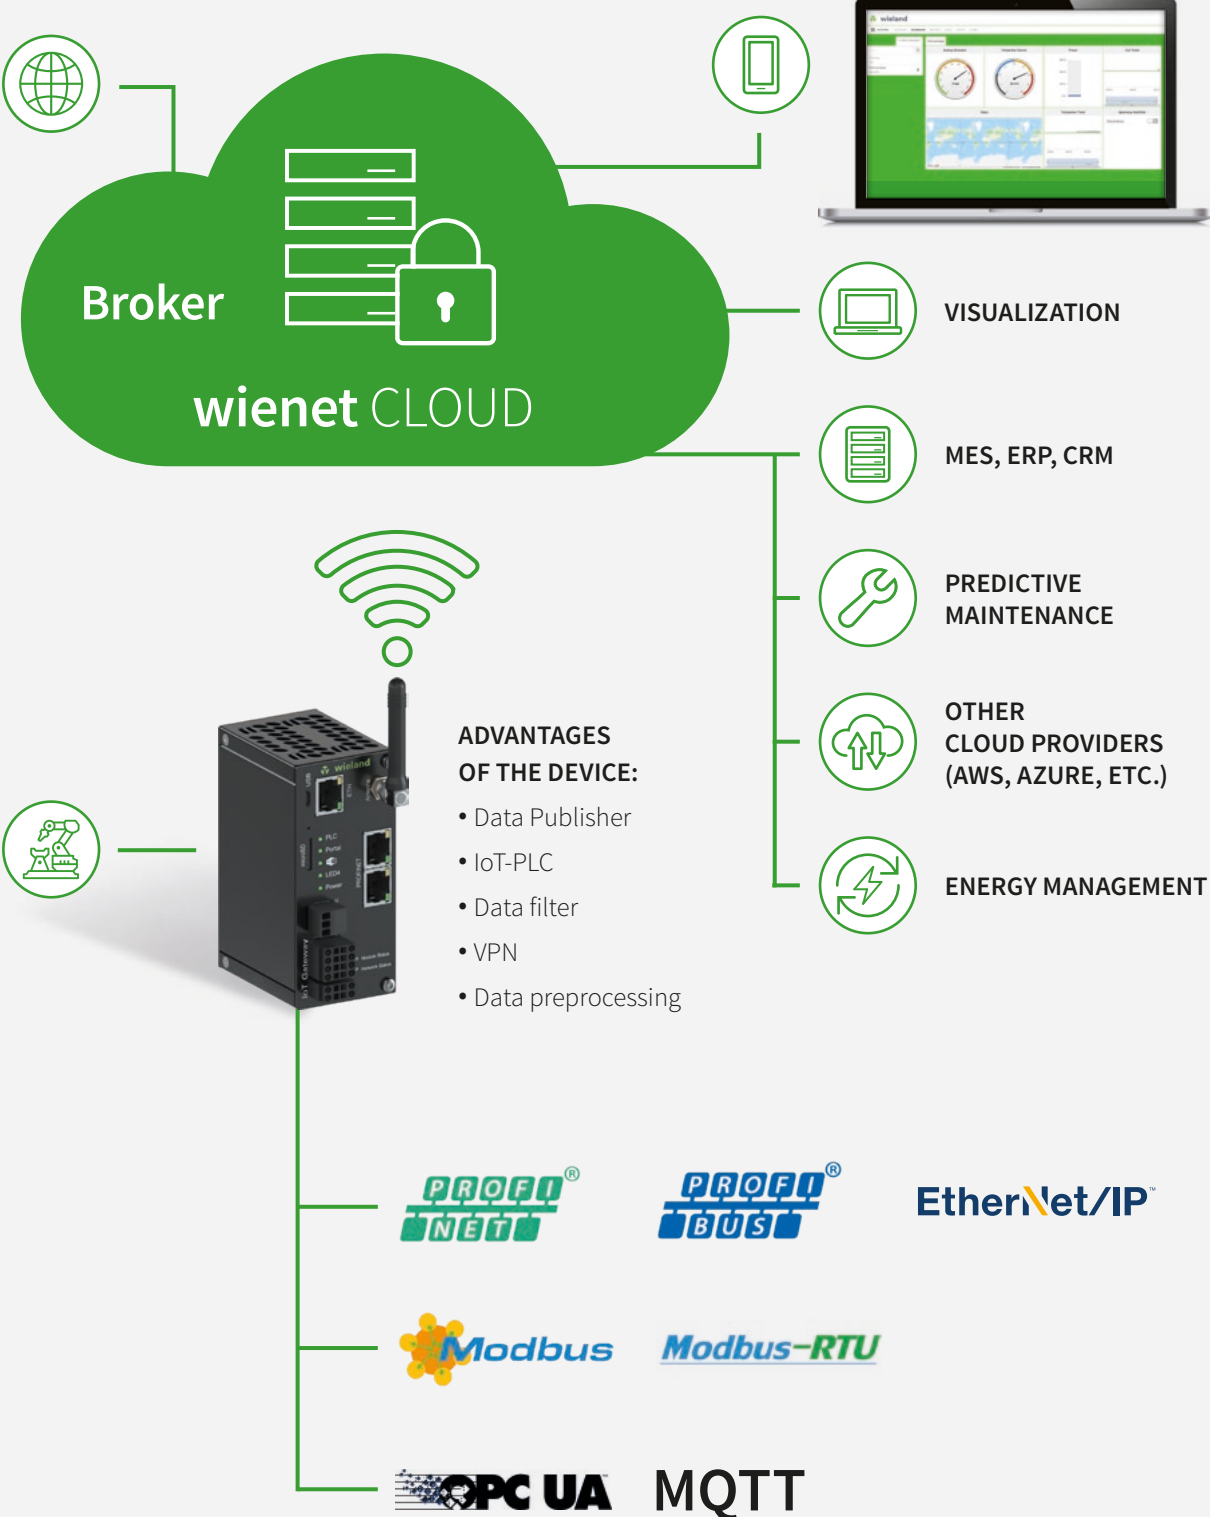

WIENET CLOUD IIoT CLOUD SERVICES

Our IIoT communication solutions provide you as mechanical engineers not only with efficient products, but also with a smart service module that you can use to guide your customers on the way to the Smart Factory, achieving a clear competitive advantage.



- + Easy entry to IIoT communication
- + Scalable, extendable solution
- + Hardware, cloud, service + support from a single source
- + Data can be accessed anywhere



PERFORMANCE FEATURES

- + Model Gateway or modem gateway
- + Fieldbus Profibus, ProfiNet, Ethernet IP, Modbus TCP, Modbus RTU
- + Serial interface RS232/RS485
- + Software RTOS-LNX real-time operating system
- + Communication services MQTT, OPC UA



IIoT **STARTER KIT** – FOR YOUR EASY **ENTRY** INTO THE **IIoT**.

You are not sure if your company is ready for the Industrial Internet of Things? Just try it!
Our starter kits include everything you need for an easy entry into the IIoT – from a gateway to cloud access.



THE STARTER KITS CONTAIN THE FOLLOWING:

- Gateway with VPN service and integrated IoT-PLC
- Free cloud access for one year
- Quick start guide for the connection with the cloud



PROCESS FOR A COMPLETE IoT SOLUTION.

1.

COLLECTION OF THE DIGITAL DATA AT THE MACHINE

Digitisation starts at the machine, where digital data are collected and prepared for their journey through the Internet.

The IoT gateways from the starter kit collect your data from Modbus RTU, Modbus TCP or digital I/Os.

SELECT ONE OF TWO MODELS:

WIENET IoT SK115-W

- 2x Ethernet 10/100 Mbit/s
- 1 serial RS485
- Communication via
 - Modbus RTU
 - Modbus TCP
 - OPC UA server
 - MQTT client (publisher/subscriber)

WIENET IoT SK100-DIO8-3G-W

- 1x Ethernet 10/100 Mbit/s
- 3G mobile modem
- 4 digital inputs, 4 digital outputs
- Communication via
 - Modbus RTU
 - Modbus TCP
 - OPC UA server
 - MQTT client (publisher/subscriber)

2.

FROM BIG DATA TO SMART DATA

The two worlds of production and IoT do not understand each other just like that. Edge intelligence is the key not only to making data comprehensible, but also to specifying them in order to be able to make good use of them. The easiest way to do this is with the IoT PLC integrated in the IoT gateways.

3.

EVALUATING THE DATA

The value of data is not always obvious. Mostly, digital data first have to be standardized, or several values must be combined to an overall value. Only once this has been done, they can serve as a reasonable basis for optimization measures and evaluations.

GATEWAYS · WIENET IoT-GW

TECHNICAL DATA



Description	wienet	IoT GW 115-W	IoT GW 100-PB-W	IoT GW 100-PN-W	IoT GW 100-EIP-W	IoT GW 100-DIO8-W
Art. No.		83.041.1100.0	83.041.1280.0	83.041.1250.0	83.041.1260.0	83.041.1210.0

IIoT gateway interfaces

Ethernet		2x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT
Fieldbus		-	1x Profibus	2x ProfiNet	2x EtherNet/IP	-
Digital inputs/output		-	-	-	-	8
USB		-	1x USB 2.0	1x USB 2.0	1x USB 2.0	1x USB 2.0
SD		1x microSD	1x microSD	1x microSD	1x microSD	1x microSD
LED indication		-	Module status / network status	Module status / network status	Module status / network status	-

Software

Operating System		RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system
WEB-PLC editor and runtime		Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor
WEB-PLC diagram		512 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants
WEB-PLC function units		Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing
WEB-PLC Additional features		Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, Profibus DP, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, ProfiNet, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, Profibus DP, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, Profibus DP, CODESYS network variables, SNMP, COM servers, remote or locale update

Technical data

CPU		SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz
Memory		128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk
Realtime Clock		Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)
Operating voltage min.-max.		20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC
Operating temperature		0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C
Storage temperature		-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C
Rel. humidity during operation min.-max. (non-condensing)		5...85 %	5...85 %	5...85 %	5...85 %	5...85 %

Dimensions

Width (mm)		37	46	46	46	46
Height (mm)		97	105	105	105	105
Depth (mm)		62	78	78	78	78
Weight		Approx. 200 g	Approx. 350 g	Approx. 350 g	Approx. 350 g	Approx. 350 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Protection class	IP20
Housing material	Powder-coated sheet steel (plastic housing with wienet IoT GW 115-W)
RoHs	Yes
Norms and approvals	CE

GATEWAYS MODEM · WIENET IoT-GW

TECHNICAL DATA



Description	wienet IoT	GW 100-PN-3G-W	GW 100-PN-WIFI-W	GW 100-EIP-3G-W	GW 100-EIP-WIFI-W	GW 100-DIO8-3G-W	GW 100-DIO8-WIFI-W
Art. No.		83.041.1251.0	83.041.1252.0	83.041.1261.0	83.041.1262.0	83.041.1211.0	83.041.1212.0

IIoT gateway interfaces

Ethernet		1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT	1x 10/100BaseT
Fieldbus		2x ProfiNet	2x ProfiNet	2x EtherNet/IP	2x EtherNet/IP	-	-
Digital inputs/output		-	-	-	-	8	8
USB		1x USB 2.0	1x USB 2.0	1x USB 2.0	1x USB 2.0	1x USB 2.0	1x USB 2.0
SD		1x microSD	1x microSD	1x microSD	1x microSD	1x microSD	1x microSD
Modem		GSM, GPRS, EDGE, HSPA+, mini SIM (2FF), push slot on the rear	IEEE 802.11 a/b/g/n, WiFi client, WiFi access point, WPA, WPA2-PSK	GSM, GPRS, EDGE, HSPA+, mini SIM (2FF), push slot on the rear	IEEE 802.11 a/b/g/n, WiFi client, WiFi access point, WPA, WPA2-PSK	IEEE 802.11 a/b/g/n, WiFi client, WiFi access point, WPA, WPA2-PSK	IEEE 802.11 a/b/g/n, WiFi client, WiFi access point, WPA, WPA2-PSK
Antenna connector		1x SMA socket	1x SMA socket	1x SMA socket	1x SMA socket	1x SMA socket	1x SMA socket
LED indication		Module status / network status	Module status / network status	Module status / network status	Module status / network status	-	-

Software

Operating System		RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system	RTOS-LNX real-time operating system
WEB-PLC editor and runtime		Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor	Visual program editor, I/O mapping editor
WEB-PLC diagram		2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants	2048 functional units, I/O values, portal variables and constants
WEB-PLC function units		Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing	Data type converter, binary, bits and bytes, controllers, messages, numerical, memory, timing
WEB-PLC Additional features		Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, ProfiNet, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, ProfiNet, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, EtherNet/IP, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, EtherNet/IP, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, EtherNet/IP, CODESYS network variables, SNMP, COM servers, remote or locale update	Event log, SNMP, OpenVPN, DHCP, NAT, firewall, messages, EtherNet/IP, CODESYS network variables, SNMP, COM servers, remote or locale update

Technical data

CPU		SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz	SC145 embedded controller 32-bit processor with 528 MHz
Memory		128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk	128 MB RAM (DDR3), 64 MB flash disk
Realtime Clock		Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)	Lithium battery (rechargeable)
Operating voltage min.-max.		20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC	20.4 - 27.6 V DC
Operating temperature		0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C	0 °C...+55 °C
Storage temperature		-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C	-20 °C...+60 °C
Rel. humidity during operation min.-max. (non-condensing)		5...85 %	5...85 %	5...85 %	5...85 %	5...85 %	5...85 %

Dimensions

Width (mm)		46	46	46	46	46	46
Height (mm)		105	105	105	105	105	105
Depth (mm)		78	78	78	78	78	78
Weight		Approx. 350 g	Approx. 350 g	Approx. 350 g	Approx. 350 g	Approx. 350 g	Approx. 350 g

COMPACT I/O FIELDBUS SYSTEM

ricos FLEX is a modular and extremely compact I/O system. It can be combined and used with any PLC and any IPC. ricos FLEX combines high functionality with a smart housing concept in a very compact design and can therefore be adjusted precisely to the requirements of the user.

All bus coupler units support up to 64 application modules. One module unit consists of a connecting module and an electronic module, which are connected with a secure sliding and latching mechanism. The connection module combines terminals, accommodation for the electronic module and the ricos FLEX backplane bus connector. So for servicing, only the electronic module is replaced by simply pulling out the connection module – the wiring and mounting on the 35 mm DIN profile rail remain intact. The stepped terminals with spring-force technology on the connecting module enable quick, clear and safe wiring. The integrated status LEDs and the labeling strips on the front of the electronic modules ensure that each channel status can be easily and uniquely assigned and read.



COMMUNICATION

- Transfer rate of 48 Mbit/s
- Very fast reaction time of up to 20 μ s
- One connection module for all application modules



INSTALLATION

- Very simple assembly thanks to secure sliding mechanism
- Module protection through coding
- Service-friendly combination of connection module and application module
- Recommendation: Installation on high top hat rail (MR 35 x 15)



CONNECTION TECHNOLOGY

- Stepped wiring level with spring force terminal technology
- Simple module replacement with permanent wiring
- High modularity with 4 and 8-channel modules



INDICATION + LABELING

- Clearly arranged status and diagnostic displays with direct channel assignment for fast troubleshooting
- Labeling strips for individual marking of each channel



CONNECTION OF SENSOR/ACTUATOR LEVEL TO THE IIoT EDGE CONTROLLER.



ADVANTAGES OF THE DEVICE:

- Data Publisher
- IoT-PLC
- Data filter
- VPN
- Data preprocessing



ADVANTAGES OF THE DEVICE:

- High-performance backplane bus
- Modular extendability
- Integrated power supply

I/O FIELDBUS SYSTEM

RICOS FLEX

The economic and compact I/O system ricos FLEX is equipped with a fast backplane bus, diagnosis LEDs for each channel and permanent wiring. It offers you highest cost effectiveness thanks to its modular concept, in particular when it comes to installation and service, and it can be combined and used with many systems from other manufacturers.



- + Cost-efficiency through a highly-modular design
- + Compact and space-saving design
- + Smart labeling and diagnosis concept
- + Easy installation and maintenance
- + High performance



PERFORMANCE FEATURES

- + Modularity 4 to 8-channel modules / up to 64 per bus coupler unit
- + Module width 12.9 mm
- + Fieldbus Profibus DP, Modbus TCP, ProfiNet-IO, EtherNet/IP, EtherCAT
- + Performance +/-1 μ s timed switching (independent of the fieldbus)



FIELDBUS COUPLER · RICOS FLEX

TECHNICAL DATA



Description	ricos FLEX BC DP	ricos FLEX BC MODBUS
Art. No.	83.036.1000.1	83.036.1040.0

Technical data Fieldbus

Fieldbus	Profibus DP	Modbus TCP
Connection	9-pol Sub-D-female	RJ45 / Ethernet 10/100 Mbit
Max. number of digital modules	64	64
Max. number of analog modules	64	64
Baud rate	9.6 kbit/s - 12 Mbit/s	100 Mbit/s
Address range for inputs max.	244 byte	1 KB
Address range for outputs max.	244 byte	1 KB

Technical features

Operating voltage min.-max.	20.4 - 28.8 V DC	20.4 - 28.8 V DC
Input current	0.95 A	0.95 A
Operating temperature	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %

Dimensions

Width (mm)	48.5	48.5
Height (mm)	109	109
Depth (mm)	76.5	76.5
Weight	approx. 155 g	approx. 155 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Terminal type	Spring clamp terminal
Terminal cross-section	0.08 - 1.5 mm ²
Max. modules per carrier	64
Protection class	IP20
Housing material	Plastic
Diagnosis display	LED
RoHs	Yes
Norms and approvals	CE, cULus

FIELDBUS COUPLER · RICOS FLEX

TECHNICAL DATA



Description	ricos FLEX BC PROFINET	ricos FLEX BC EtherNet/IP	ricos FLEX BC EtherCAT
Art. No.	83.036.1010.1	83.036.1050.0	83.036.1060.0

Technical data Fieldbus

Fieldbus	PROFINET IO	EtherNet/IP	EtherCAT
Connection	2 x RJ45 / Ethernet 100 Mbit	RJ45 / Ethernet 100 Mbit	2 x RJ45 / Ethernet 100 Mbit
Max. number of digital modules	64	64	64
Max. number of modules	64	64	64
Baud rate	100 Mbit/s	100 Mbit/s	100 Mbit/s
Address range for inputs max.	512 bytes	1 KB	512 bytes
Address range for outputs max.	512 bytes	1 KB	512 bytes

Technical features


Operating voltage min.-max.	20.4 - 28.8 V DC	20.4 - 28.8 V DC	20.4 - 28.8 V DC
Input current	0.95 A	0.95 A	0.95 A
Operating temperature	0...+60 °C	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %	10...95 %

Dimensions

Width (mm)	48.5	48.5	48.5
Height (mm)	109	109	109
Depth (mm)	76.5	76.5	76.5
Weight	approx. 155 g	approx. 155 g	approx. 155 g

POTENTIAL DISTRIBUTION BLOCK + POWERMODULE

RICOS FLEX · TECHNICAL DATA



Description	ricos	FLEX PV 8xDC24V	FLEX PV 8xDC0V	FLEX PV 4xDC24V 4DC0V
Art. No.		83.036.0000.0	83.036.0010.0	83.036.0020.0

Description	ricos	FLEX PW DC 24V
Art. No.		83.036.0030.0

Technical data Potential distribution block

	8 x 24 V DC	8 x 0 V DC	4 x 24 V DC; 4 x 0 V DC
Number of terminals	8 x 24 V DC	8 x 0 V DC	4 x 24 V DC; 4 x 0 V DC
Terminal voltage max.	30 V DC	0 V DC	30 V DC; 0 V DC
Terminal current max.	10 A	10 A	10 A
Max. total current per module	10 A	10 A	10 A

Technical data Power module

Input voltage min.-max.	20.4 - 28.8 V DC
Output voltage	24 V
Output current	10 A
Reverse polarity protection	Yes
Overvoltage protection	36 V

Technical features

Operating voltage min.-max.	20.4 - 28.8 V DC	20.4 - 28.8 V DC	20.4 - 28.8 V DC
Operating temperature	0...+60 °C	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %	10...95 %

Technical features

Operating voltage min.-max.	20.4 - 28.8 V DC
Operating temperature	0...+60 °C
Storage temperature	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %

Dimensions

Width (mm)	12.9	12.9	12.9
Height (mm)	109	109	109
Depth (mm)	52.5	52.5	52.5
Weight	approx. 50 g	approx. 50 g	approx. 50 g

Dimensions

Width (mm)	12.9
Height (mm)	109
Depth (mm)	76.5
Weight	60 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Terminal type	Spring clamp terminal
Terminal cross-section	0.08 - 1.5 mm ²
Protection class	IP20
Housing material	Plastic
Diagnosis display	LED
RoHs	Yes
Norms and approvals	CE, cULus

DIGITAL INPUTS + OUTPUTS

RICOS FLEX · TECHNICAL DATA



Description	ricos	FLEX 8xDI DC24V
Art. No.		83.036.2300.0

Technical data Digital inputs

Number of inputs	8
Input voltage min.-max.	20.4 - 28.8 V DC
Input current with signal 1	3 mA
Switching level 0	0 - 5 V DC
Switching level 1	15 - 28.8 V DC
Channel status (high)	LED (green)

Technical features

Operating temperature	0...+60 °C
Storage temperature	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %

Dimensions

Width (mm)	12.9
Height (mm)	109
Depth (mm)	76.5
Weight	approx. 60 g



Description	ricos	FLEX 4xDO DC24V 0,5A	FLEX 8xDO DC24V 0,5A
Art. No.		83.036.3200.0	83.036.3300.0

Technical data Digital outputs

Number of outputs	4	8
Output voltage min.-max.	20.4 - 28.8 V DC	20.4 - 28.8 V DC
Output current at state 1	0.5 A / 2 A	0.5 A
Output protection	Short circuit and overload protection	Short circuit and overload protection
Channel status (high)	LED (green)	LED (green)

Technical features

Operating temperature	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %

Dimensions

Width (mm)	12.9	12.9
Height (mm)	109	109
Depth (mm)	76.5	76.5
Weight	approx. 60 g	approx. 60 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Terminal type	Spring clamp terminal
Terminal cross-section	0.08 - 1.5 mm ²
Protection class	IP20
Housing material	Plastic
Diagnosis display	LED
RoHs	Yes
Norms and approvals	CE, cULus

ANALOG INPUTS · RICOS FLEX

TECHNICAL DATA



Description	ricos FLEX 4xAI 12BIT 0...10V	ricos FLEX 4xAI 12BIT 0(4)...20mA	ricos FLEX 4xAI 16BIT R,RTD
Art. No.	83.036.4200.0	83.036.4240.0	83.036.4261.0

Technical data Analog inputs

Number of inputs	4	4	4
Measuring ranges	0 - 10 V	0 (4) - 20 mA	RTD, PT100
Resolution in bits	12	12	16
Conversion time	1.15 ms	1.15 ms	1.15 ms
Module status	LED (green)	LED (green)	LED (green)

Technical features

Operating temperature	0...+60 °C	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %	10...95 %

Dimensions

Width (mm)	12.9	12.9	12.9
Height (mm)	109	109	109
Depth (mm)	76.5	76.5	76.5
Weight	approx. 60 g	approx. 60 g	approx. 60 g

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Top-hat rail
Terminal type	Spring clamp terminal
Terminal cross-section	0.08 - 1.5 mm ²
Protection class	IP20
Housing material	Plastic
Diagnosis display	LED
RoHs	Yes
Norms and approvals	CE, cULus

ANALOG OUTPUTS · RICOS FLEX

TECHNICAL DATA



Description	ricos FLEX 4xAO 12BIT 0...10V	ricos FLEX 4xAO 12BIT 0(4)...20mA
Art. No.	83.036.5200.0	83.036.5220.0

Technical data Analog outputs

Number of outputs	4	4
Measuring ranges	0 - 10 V	0 (4) - 20 mA
Resolution in bits	12	12
Conversion time	2 ms, all channels	2 ms, all channels
Module status	LED (green)	LED (green)

Technical features

Operating temperature	0...+60 °C	0...+60 °C
Storage temperature	-25 °C...+70 °C	-25 °C...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10...95 %	10...95 %

Dimensions

Width (mm)	12.9	12.9
Height (mm)	109	109
Depth (mm)	76.5	76.5
Weight	approx. 60 g	approx. 60 g

FUNCTIONAL TOUCH PANELS

WIENET HMI ECO

Touch panels are today used in many machines and systems for the visualization, operation, and diagnosis. By transferring the user habits from the consumer world into the automation world, the HMI ECO series has been especially developed for industrial requirements and needs.



- + Easy programming via Ethernet or USB client
- + Quick commissioning and configuration via USB host
- + Seamless data exchange between the hmi PLAN visualization software and the samos® PLAN 6 planning software
- + Convenient data exchange with renowned PLC manufacturers with export and import functions
- + One project file for all variables
- + Simple conversion between variables



PERFORMANCE FEATURES

- + Resolution: up to 1024 x 768 pixels
- + Expanded temperature range: From -10 °C to +60 °C (standard panels)
From -20 °C to +60 °C (on request)
- + Design: IP66 / Nema 4
- + Screen sizes: 4.3", 7", 10", 12.1" and 15"
- + Programmable menu pages: > 7,000



EASY CONFIGURATION – HMI PLAN

Rely on the safe operation of your machine. hmi PLAN, our software for the HMI ECO panels, integrates software drivers for more than 40 manufacturers. Configuration will also be like child's play with hmi PLAN. Import your variables from samos® PLAN 6 into the software for easy configuration of your panel and avoid naming errors when creating the safety variables to shorten the commissioning time of your panel.




THE BENEFITS TO YOU:

- + Flexible structure with several applications
- + Conversion independent of variable
- + Non-volatile internal Memory
- + 9 user levels with password protection
- + Real-time clock and data even after reboot
- + Alarm messages per e-mail
- + Recipe management
- + Data collection, sequence control, macros

PERFECT SOLUTION BUNDLE

Together with samos® PRO COMPACT, we offer you a consistent, intuitive complete solution for your machines.

- + Programmable with hmi PLAN via Ethernet/USB
- + Convenient import of variables with samos® PLAN 6
- + On-board Modbus TCP in SP-COP2-ENI
- + Wieland driver in hmi PLAN for samos® PRO
- + Default settings in hmi PLAN
- + Easy toggling between Modbus master and slave

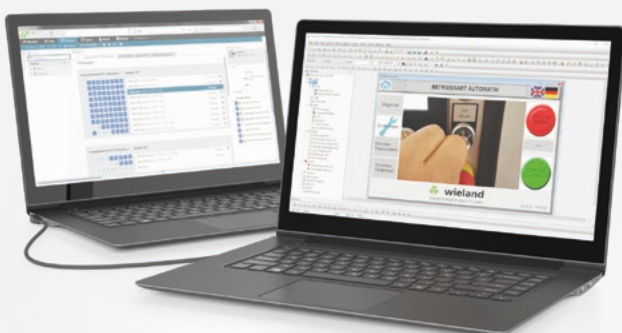

SEEMLESS DATA EXCHANGE

Rely on the import/export function of hmi PLAN with samos® PLAN and avoid errors when naming your safety functions.

- + Export of variables from samos® PLAN 6 with “one click”
- + Convenient import of tags in hmi PLAN
- + Automatic import of variable addresses
- + Considerably time-saving when troubleshooting

MY LOGO – CUSTOMER-SPECIFIC DESIGN

Our HMI touch panels are used to visualize, operate, and diagnose in many machines and systems. Together with our safety controller samos® PRO, the automation of entire systems is possible with HMI ECO.



15"

12,1"

10"

7"

4,3"

“MyLogo” offers you our panels in your own design. This ensures the consistent design of your machines. Starting from orders of 100 panels.

CREATE YOUR OWN DESIGN IN A FEW STEPS

- + Get temporary offer
- + Select your RAL colors
- + Download and use of the DXF file template
- + Send customized design template to Wieland
- + Clarification and feedback of production/delivery time by Wieland
- + Get final offer
- + Validate and order final design (DXF file)



YOU HAVE THE CHOICE:

- Screen size
- BG Color
- Own logo
- Customized printing



VNC FUNCTIONALITY

Control via smartphone and tablet

With our HMI-ECO panels, it is now possible to control your machine with your smartphone or tablet. Virtual Network Computing (VNC) makes it possible. This gives you flexibility when it comes to controlling as well as to monitoring your machine.

YOUR ADVANTAGES AT A GLANCE

- + End devices for commissioning and diagnosis
- + Each panel serves as a VNC server
- + Remote control for the machine
- + Monitoring of the machine
- + Authentication by user level

TOUCH PANELS · WIENET HMI ECO

TECHNICAL DATA



Description	HMI-ECO-043	HMI-ECO-070	HMI-ECO-100
Art. No.	83.050.0000.0	83.050.0001.0	83.050.0002.0

Technical data

Screen size	4.3" diagonal	7" diagonal (wide screen)	10" diagonal
Resolution	480 x 272 pixels	800 x 480 pixels	1024 x 600 pixels

Dimensions/weight

Width (mm)	129	203.5	270.8
Height (mm)	103	148.5	212.8
Depth (mm)	33	37	42.5
Frame size (mm)	118.5 x 92.5	191.5 x 138	259.5 x 201.5
Weight	approx. 230 g	approx. 550 g	approx. 1100 g

Technical features

Programming software	hmiPLAN	hmiPLAN	hmiPLAN
Screen type	TFT color LCD with LED backlight	TFT color LCD with LED backlight	TFT color LCD with LED backlight
Touch technology	Resistive touch	Resistive touch	Resistive touch
Serial interface	1x Industrial Ethernet, 1x RS232, 1x RS422, 3x RS485	1x Industrial Ethernet, 1x RS232, 1x RS422, 4x RS485	1x Industrial Ethernet, 1x RS232, 1x RS422, 4x RS485
Number of colors max.	16 bits	16 bits	16 bits
Backlight life in hours	20000 h	20000 h	20000 h
Luminance	450 cd/m ²	450 cd/m ²	350 cd/m ²
CPU type	RISC ARM9 32 bit	RISC ARM9 32 bit	RISC ARM9 32 bit
Main memory max.	64 MB	64 MB	64 MB
USB 2.0	Host and client	Host and client	Host and client
Ethernet	RJ-45	RJ-45	RJ-45
Operating voltage min.-max.	24 V DC +- 10 % (insulated)	24 V DC +- 10 % (insulated)	24 V DC +- 10 % (insulated)
Power	10 W	20 W	20 W
Real time clock	Yes	Yes	Yes
Battery backed RAM	Yes	Yes	Yes
Operating temperature	-10...+60 °C (-20...+60 °C on request)	-10...+60 °C (-20...+60 °C on request)	-10...+60 °C (-20...+60 °C on request)
Storage temperature	-20...+70 °C	-20...+70 °C	-20...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10-90 %	10-90 %	10-90 %

GENERAL TECHNICAL DATA FOR THE SERIES

Mounting method	Built-in component
IP rating (front)	IP66 / NEMA 4
Cooling	Natural Cooling with min. 50 mm distance
Shock	50 G, 11 Ms, X, Y, Z, direction (EN 60068-2-27)
RoHs	Yes
Norms and approvals	FCC Part 15 Class A, CE, cULus (cULus for size 12 & 15 only from Q4/2019)

TOUCH PANELS · WIENET HMI ECO

TECHNICAL DATA



Description	HMI-ECO-120	HMI-ECO-150
Art. No.	83.050.0003.0	83.050.0004.0
Technical data		
Screen size	12.1" diagonal	15" diagonal
Resolution	1024 x 768 pixels	1024 x 768 pixels
Dimensions/weight		
Width (mm)	335.4	399.1
Height (mm)	245.8	267.6
Depth (mm)	58.2	57.5
Frame size (mm)	302 x 228	384.5 x 283
Weight	approx. 2000 g	approx. 3000 g
Technical features		
Programming software	hmiPLAN	hmiPLAN
Screen type	TFT color LCD with LED backlight	TFT color LCD with LED backlight
Touch technology	Resistive touch	Resistive touch
Serial interface	1x Industrial Ethernet, 1x RS232, 1x RS422, RS485	1x Industrial Ethernet, 1x RS232, 1x RS422, 4x RS485
Number of colors max.	16 bits	16 bits
Backlight life in hours	20000 h	20000 h
Luminance	500 cd/m ²	350 cd/m ²
CPU type	RISC ARM9 32 bit	RISC ARM9 32 bit
Main memory max.	64 MB	64 MB
USB 2.0	Host and client	Host and client
Ethernet	RJ-45	RJ-45
Operating voltage min.-max.	24 V DC +/- 10 % (insulated)	24 V DC +/- 10 % (insulated)
Power	20 W	20 W
Real time clock	Yes	Yes
Battery backed RAM	Yes	Yes
Operating temperature	-10...+60 °C (-20...+60 °C on request)	-10...+60 °C (-20...+60 °C on request)
Storage temperature	-20...+70 °C	-20...+70 °C
Rel. humidity during operation min.-max. (non-condensing)	10-90 %	10-90 %


ACCESSORIES



Description	Type	Art. No.	PU
Ethernet programming cable, 2 m	SP-CABLE-ETH1	R1.190.1020.0	1
Single-user license for hmiPLAN programming software	HMI-LICENSE-SINGLE	ZW.000.0170.0	1

WIENET SERIAL DEVICE SERVERS

Our serial device servers let you connect your end devices with serial interface directly to the Ethernet network. The Ethernet interface can be cable-based (LAN) or via radio (WiFi). This means, even older devices can be integrated into the network and thus into the IIoT environment.

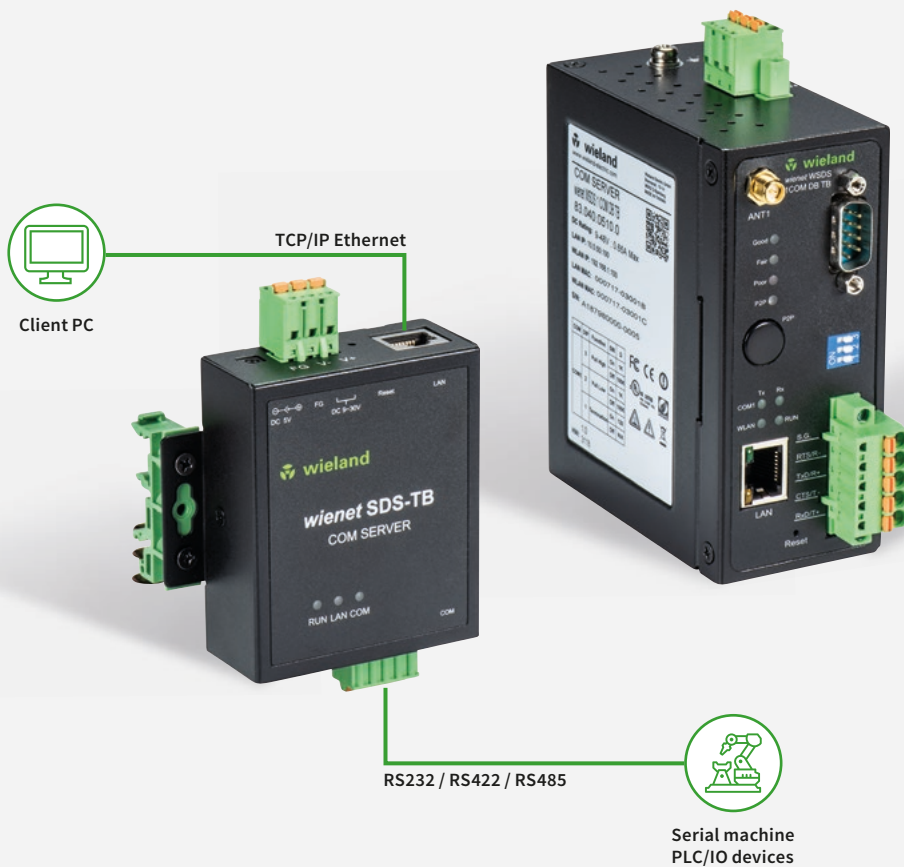

- + Converting a serial interface to an Ethernet interface
- + Integration of serial devices directly into the Ethernet network
- + Suitable for industrial use



TYPICAL APPLICATIONS:

- + Access control system
- + Connection of measuring devices
- + Identification systems
- + Cash register systems
- + Serial Com interface to PLC, drives, HMI,

SERIAL DEVICE SERVERS · WIENET SDS

TECHNICAL DATA



Description	wienet SDS-DB	wienet SDS-TB	wienet SDS-DB KIT
Art. No.	83.040.0500.0	83.040.0501.0	83.040.0502.0

Communication Ethernet

Ethernet interface	1x 10/100BASE-T(X) RJ45	1x 10/100BASE-T(X) RJ45	1x 10/100BASE-T(X) RJ45
Standard	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X)	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X)	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X)

Serial interface

Connection	D-Sub RS-232/485 software configurable	Terminal block (TB5) RS-232/485 software configurable	D-Sub RS-232/485 software configurable
Baud rate	1,200-460,800 bps (RS-485 4-wire permitted up to 921,600 bps)	1,200-460,800 bps (RS-485 4-wire permitted up to 921,600 bps)	1,200-460,800 bps (RS-485 4-wire permitted up to 921,600 bps)
Parity	None, odd, even, space, mark	None, odd, even, space, mark	None, odd, even, space, mark
Data Bits	7, 8	7, 8	7, 8
Stop Bits	1, 2	1, 2	1, 2
Data flow control	None, Xon/Xoff, RTS/CTS (only RS-232)	None, Xon/Xoff, RTS/CTS (only RS-232)	None, Xon/Xoff, RTS/CTS (only RS-232)

Software

Protocols	IPv4, TCP, UDP, DHCP Client, SNMP, HTTP, HTTPS, Telnet, ARP	IPv4, TCP, UDP, DHCP Client, SNMP, HTTP, HTTPS, Telnet, ARP	IPv4, TCP, UDP, DHCP Client, SNMP, HTTP, HTTPS, Telnet, ARP
IT security	Ipssec encapsulation	Ipssec encapsulation	Ipssec encapsulation
Configuration	Web user interface	Web user interface	Web user interface
Virtual COM	Windows/Linux redirection software	Windows/Linux redirection software	Windows/Linux redirection software
TCP server	4 Connection, Virtual COM or reverse Telnet	4 Connection, Virtual COM or reverse Telnet	4 Connection, Virtual COM or reverse Telnet
TCP client	Single Destination or Virtual COM	Single Destination or Virtual COM	Single Destination or Virtual COM
UDP	Up to 4 ranges of Ips	Up to 4 ranges of Ips	Up to 4 ranges of Ips

Supply

Supply voltage	9 - 30 VDC via pluggable connection clamp	9 - 30 VDC via pluggable connection clamp	9 - 30 VDC via pluggable connection clamp
Power consumption	< 9 W	< 9 W	< 9 W

Ambient conditions

Operating temperature	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C
Storage temperature	-40 °C...+70 °C	-40 °C...+70 °C	-40 °C...+70 °C
Relative humidity	5...95 % (no moisture condensation)	5...95 % (no moisture condensation)	5...95 % (no moisture condensation)
Protection class	IP30	IP30	IP30

Dimensions

Width (mm)	65	65	88.5
Height (mm)	78	78	78
Depth (mm)	28	28	28
Weight	approx. 185 g	approx. 185 g	approx. 185 g

Standards and provisions of the SDS series

EMC	FCC Part 15, Subpart B, Class A, EN 55032, EN61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-6-2
-----	--

SERIAL DEVICE SERVERS · WIENET SDS

TECHNICAL DATA



Description	wienet SDS-TB KIT	wienet WSDS 1 COM DB TB
Art. No.	83.040.0503.0	83.040.0510.0
Communication Ethernet		
Ethernet interface	1x 10/100BASE-T(X) RJ45	1x 10/100BASE-T(X) RJ45
Standard	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X)	IEEE 802.3 for 10BASE-T IEEE 802.3u for 100BASE-T(X)
WIFI network	-	IEEE 802.11 b/g/n
Serial interface		
Connection	D-Sub RS-232/485 software configurable	D-Sub or TB5 RS-232/422/485 software configurable
Baud rate	1,200-460,800 bps (RS-485 4-wire permitted up to 921,600 bps)	1,200-460,800 bps (RS-485 4-wire permitted up to 921,600 bps)
Parity	None, odd, even, space, mark	None, odd, even, space, mark
Data Bits	7, 8	7, 8
Stop Bits	1, 2	1, 2
Data flow control	None, Xon/Xoff, RTS/CTS (only RS-232)	None, Xon/Xoff, RTS/CTS
Software		
Protocols	IPv4, TCP, UDP, DHCP Client, SNMP, HTTP, HTTPS, Telnet, ARP	IPv4, ICMP, TCP, UDP, DHCP Client, SNMP, SMTP, HTTP, DNS, NTP, RADIUS, RFC2217, WPS, Syslog
IT security	Ipssec encapsulation	Ipssec encapsulation Wireless: WEP, WPA, WPA2, TKIP, AES, 802.1x"
Configuration	Web user interface	Web user interface
Virtual COM	Windows/Linux redirection software	Windows/Linux redirection software
TCP server	4 Connection, Virtual COM or reverse Telnet	4 Connection, Virtual COM or reverse Telnet
TCP client	Single Destination or VirtualCOM	Single Destination or VirtualCOM
UDP	Up to 4 ranges of Ips	Up to 4 ranges of Ips
Supply		
Supply voltage	9 - 30 VDC via pluggable connection clamp	9 - 30 VDC via pluggable connection clamp
Power consumption	< 9 W	< 6 W
Ambient conditions		
Operating temperature	-40 °C...+70 °C	-10 °C...+60 °C
Storage temperature	-40 °C...+70 °C	-40 °C...+85 °C
Relative humidity	5...95 % (no moisture condensation)	5...95 % (no moisture condensation)
Protection class	IP30	IP30
Dimensions		
Width (mm)	65	47
Height (mm)	78	110
Depth (mm)	28	90
Weight	approx. 185 g	approx. 500 g
Standards and provisions of the WSDS series		
EMC	EN 301489-1 V 1.9.2, EN 301489-17 V2.2.2 (Class A) FCC Part 15, Subpart B, Class A, EN 55032, EN61000-6-4, EN 61000-3-2, EN 61000-3-3, EN 55024, EN 61000-6-2	
Radio	FCC 15C 15.247, FCC 15E 15.407, EN 301893 V1.7.1, EN 300328 V1.8.1	

ACCESSORIES



Description	wienet ANTENNE GXR623	wienet ANTENNE 15863V2	wienet ANTENNE 15018	wienet ANTENNE 150181V2
Art. No.	83.041.0200.0	F0.000.0035.1	F0.000.0036.1	F0.000.0036.2

General data

Application	Flat mobile radio antenna for 2G and 3G mobile networks, e.g. for outdoor installation on cabinets or machines	Mobile radio round beam roof antenna for indoors and outdoors	Magnetic holder for antennas with SMA/M connection	Mobile radio rod antenna
-------------	--	---	--	--------------------------

Technical data

Frequency bands	GSM, GPRS, EDGE, UMTS	GSM, GPRS, EDGE, UMTS, LTE	GSM, GPRS, EDGE, UMTS, LTE	GSM, GPRS, EDGE, UMTS, LTE
Gain max.	2.2 dBi	4 dBi	-	5 dBi
Connection	SMA/M	SMA/M	SMA/F (antenna), SMA/M (cable)	SMA/M
Cable	2.5 m	5 m	2.5 m	-
Dimensions, approx. in mm	75 x 80 x 13	82 x 48 x 48	42 x 50 Ø	Height approx. 240 mm
Installation	Wall	Including mast or wall mounting bracket	Magnetic holder	On magnetic holder or directly on device



Description	wienet ANTENNE 15862V2	wienet ANTENNE 15872V2	wienet ANTENNE 15854V2 WIFI MAGNET ANT.	wienet ANTENNE 15874V2 WIFI
Art. No.	F0.000.0037.6	F0.000.0037.8	F0.000.0037.4	F0.000.0037.5

General data

Application	Mobile radio high-performance outdoor antenna for LTE	Mobile radio high-performance outdoor antenna for LTE	WLAN 2.4 GHz WIFI/WLAN rod antenna with magnetic holder	WLAN 2.4 GHz WIFI/WLAN roof/wall antenna for indoors and outdoors
-------------	---	---	---	---

Technical data

Frequency bands	GSM, GPRS, EDGE, UMTS, LTE	GSM, GPRS, EDGE, UMTS, LTE	2.4 GHz ISM band for WIFI/WLAN, Bluetooth, or Zigbee	2.4 GHz ISM band for WIFI/WLAN, Bluetooth, or Zigbee
Gain max.	5 dBi	9 dBi	4.8 dBi	4.8 dBi
Connection	2x SMA/M	2x SMA/M	SMA/M-RP	SMA/R
Cable	2x 5 m	2x 5 m	2.5 m	5 m
Dimensions, approx. in mm	186 x 155 Ø	230 x 180 Ø	223 x 29	82 x 48 x 48
Installation	Including mast or wall mounting bracket	Including mast or wall mounting bracket	Magnetic holder	Including mast or wall mounting bracket

Patch-cables RJ45



Type	Art. No.	PU
wienet Patch-cables MOD ZBH RJ45 0,25 m	78.999.4000.0	1
wienet Patch-cables MOD ZBH RJ45 0,5 m	78.999.4100.0	1
wienet Patch-cables MOD ZBH RJ45 1,0 m	78.999.4200.0	1
wienet Patch-cables MOD ZBH RJ45 2,0 m	78.999.4300.0	1
wienet Patch-cables MOD ZBH RJ45 3,0 m	78.999.4400.0	1
wienet Patch-cables MOD ZBH RJ45 5,0 m	78.999.4500.0	1
wienet Patch-cables MOD ZBH RJ45 7,5 m	78.999.4600.0	1
wienet Patch-cables MOD ZBH RJ45 10 m	78.999.4700.0	1

ACCESSORIES

Programming adapter MPI-ETH ADAPTER ACCON-NETLINK-PRO



Type	Art. No.	PU
MPI-ETH ADAPTER ACCON-NETLINK-PRO	F0.000.0031.8	1

TECHNICAL DATA	
Supported operating systems	No restriction
Hardware requirements	Ethernet interface and TCP/IP protocol
Supported PLCs	S7-200, S7-300, S7-400
Weight in kg	Approx. 0.25
Protection class	IP20
Supply voltage	24 V DC ± 25 %
External power supply	Yes
Max. current consumption	150 mA
Galvanically insulated	Yes
Operating temperature	0 °C...60 °C
Storage/transport temperature	-20 °C...+90 °C
Admissible relative air humidity	5...85 % at 30 °C (no condensation)
Connection cable to the PLC	Permanently mounted, active (no stub line, 1.2 m)
Connection cable to PC/router	Patch cable (Ethernet, straight, 3 m)
Supported bus profiles	MPI, DP, standard, universal (DP/FMS), user-defined, with automatic detection
Supported transmission rates from bus connection to PLC	9.6 kbit/s to 12 Mbit/s with automatic detection
Supported Ethernet transmission rates	10/100 Mbit/s with automatic detection
Max. number of connections on TCP/IP	16

Switching power supply 12 V for v3 + v2 routers



Type	Art. No.	PU
wienet PS 12 V v3	F0.000.0037.7	1
wienet PS 12 V v2	F0.000.0037.3	1

TECHNICAL DATA	
Input voltage	100 - 240 V AC 50/60 Hz
Output voltage	12 V DC
Output current max.	1000 mA

Pre-assembled 6-pole IO male with wires for v3 routers



Type	Art. No.	PU
wienet IO-Kabel 1m	F0.000.0037.9	1
wienet IO-Kabel 3m	F0.000.0038.0	1


TECHNICAL DATA	
Wires	CYA 0.5 mm ² (2x white, 2x purple, 2x orange)
Male	WR-MPC4 for v3 router IO interface

RJ45 interface modules

Passive interface modules, RJ45 to RJ45, RJ45 to PCB terminals, shield is also connected, PCB version with shield connection clamp

Type	Art. No.	Art. No.	PU
wienet RJ45 8S Terminal	80.000.3001.0		1
wienet RJ45 Extender		80.000.3002.0	1

TECHNICAL DATA		
Connecting cable	STP Cat 5	
Rated current	0.9 A	
Rated voltage	50 V DC	
Voltage resistance	300 V	
Data rate	100 Mbit/s	
Operating temperature range	-40 °C...+65 °C (85 °C max. 0.6 A)	
Weight approx.	approx. 50 g	
Pin assignment	1:1	
Housings	Plastic PA 6.0 GK30	
Installation	Top-hat rail	
Dimensions (W x H x D)	25.6 x 51 x 80 mm	25.3 x 46.5 x 80 mm
Connection type	Push-in terminals and RJ45 socket	2x RJ45 socket



OUR SECTOR KNOWLEDGE.

We have developed special industry knowledge in a wide variety of specialized fields. This forms the basis of our successful solutions.



Machine and system construction



Building installation



Heating, ventilation and air conditioning systems



Light technology



Combustion technology



Conveying technology



Wind energy and Photovoltaic



Lifts and escalators

OUR SOLUTIONS RANGE

for machine building and plant engineering.



podis® – Power bus system installed safely and decentralized with high IP rating



RST® – Round connectors offer highest reliability with IP 69 rating




revos – Industrial connectors for reliable power and signal distribution



fasis + selos – Terminal blocks for the perfect fit in small spaces



Components and solutions for the safety of machines and plants



wiecon® – extensive portfolio of pluggable connectors for circuit boards



wipos power supply and wienet switches allow for an industrial network and data technology



wienet – Router, Gateways and Cloud Services for a reliable communication all over the world



INFO TO GO

All brochures from Wieland Electric are available for download on our website.



<https://www.wieland-electric.com/en/support/downloads>

Interesting for you

WIENET SWITCHES

Solutions for the industrial networking for the flexible + secure management of data packets
Part No. 0801.1



WIPOS CATALOG

Power supplies for plant and machinery
Part No. 0821.1



Wieland on YouTube
See our solutions in motion



<https://www.youtube.com/user/WielandElectric>



Technical consultation
Industrial Solutions

Email: industry@wieland-electric.com

Worldwide: <https://wie.li/contactinternational>



ONLY ONE TAP AWAY

Our Wieland E-Shop

Over 25,000 products - anytime

In our online store you will find all the information about our products, prices, and technical data.

Order easily and conveniently online, and check availability.

<https://eshop.wieland-electric.com>

Scan QR code – view products in the E-SHOP.





wieland

HEADQUARTERS

Wieland Electric GmbH
Brennerstraße 10 – 14
96052 Bamberg · Germany

Phone +49 951 9324-0
Fax +49 951 9324-198
info@wieland-electric.com

0810.1 MC 01/21

Represented in over 70 countries worldwide:

www.wieland-electric.com