
CHELSEA


Chelsea Moldings are the finishing touch your tile design needs. These $\frac{3}{4}$ " thick moldings are streamlined for a seamless fit along the perimeter of doors, panels, mirrors and more, and are available in a wide variety of our most classic marbles and stones.



CHELSEA

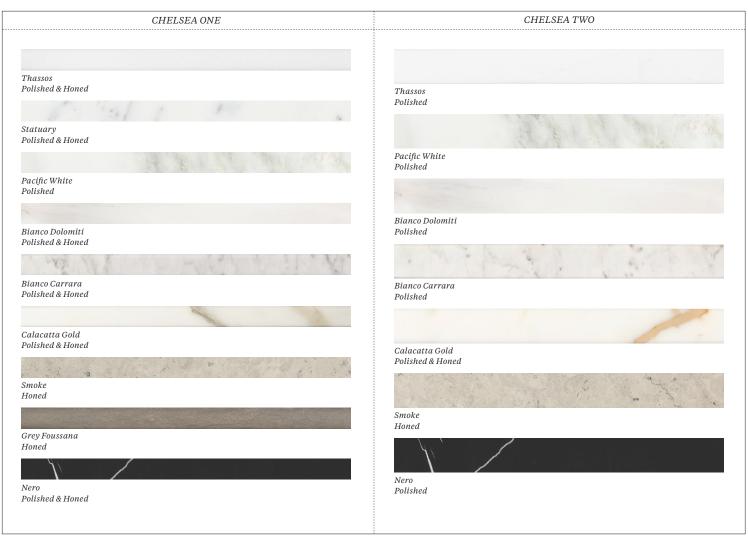

APPLICATIONS											
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER	FIREPLACE SURROUND			
No	All	Yes, including steam ¹	No	No	Yes, including Non-Freeze Thaw	No	No	Yes			



INSTALLATION/MAINTENANCE												
SETTING MATERIAL*	GROUT	GROUT JOINT	MEMBRANE	FLEXIBLE SEALANT	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT			
Ardex X77 White Microtec Fiber Reinforced Mortar ²	Ardex FG-C Microtec Unsanded	½'' minimum	Ardex 8 + 9	Ardex SX Silicone Sealant	AquaMix Sealer's Choice Gold	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	No	Required			

NOTES

- ¹ Shower Wall: Grey Foussana Conventional showers only.

 Technical specifications (usage/characteristics and installation/maintenance) are specific to each stone color.

 Please reference appropriate stone literature for further information.
- ² Setting Material: Grey Foussana & Smoke Mapei Granirapid System or Ardex N23 White Microtec Rapid Set. Tech Notes: White mortar is recommended for natural stone. For Limestone molding, seal and utilize a grout release prior to grouting. Nero moldings have reinforced rods due to breakage.

CHELSEA ONE 3/4" × 12" × 3/4" Polished & Honed CHELSEA TWO 11/4" × 12" × 3/4" Polished & Honed