INVISIBLE BLUE

A sophisticated, variegated marble with a shimmering pale blue background traced with soft grey veins and bold swathes of golden taupe and graphite. Stocked in 2cm (¾") polished slabs, honed 12" x 24" field tile and a unique trapezoidal mosaic, also honed.

SHOWN: INVISIBLE BLUE SLAB, TRAPEZOID MOSAIC & SMOKE STONE FIELD TILE

INVISIBLE BLUE

12" × 24" Field Tile

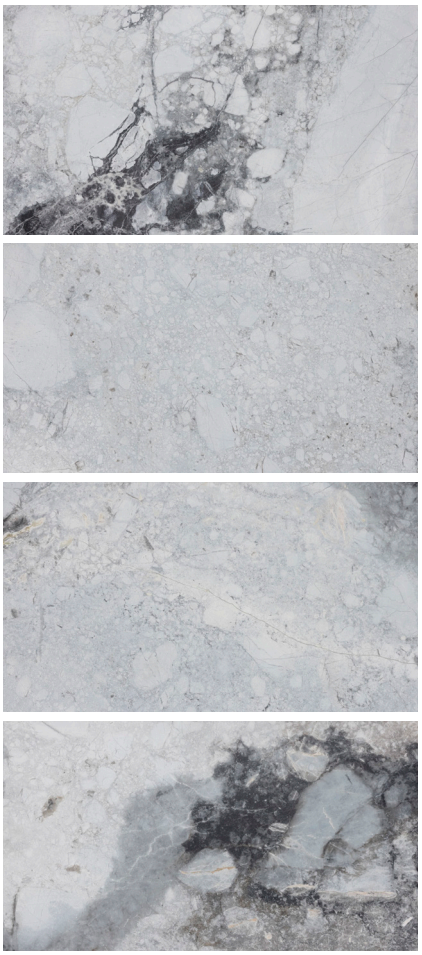

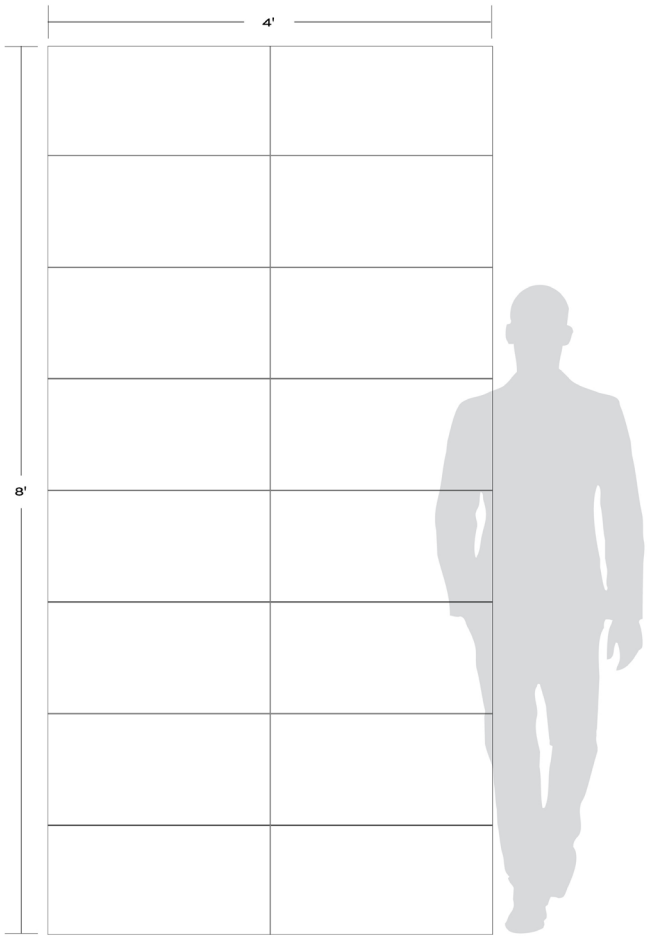

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light Traffic Residential	All excluding showers	Conventional Only	No	No	No	No	Yes	Yes

VARIATION



TAILORED TO CUSTOMIZATION

- CARPET CUTTING
- FIELD
- FINISH
- MOSAIC
- SADDLE
- VANITY TOP
- WATERJET

INSTALLATION/MAINTENANCE

SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Mapei Kerapoxy 410	Mapei Ultracolor Plus FA[1]	1/16" Min.	Mapei Mapelastic AquaDefense	Mapei Keracaulk Sanded	AquaMix Sealers Choice Gold	AquaMix Concentrated Cleaner	TCNA Handbook[2]	No	Required

NOTES

[1] Alternate Grout - Ardex FG-C Microtec Unsanded
[2] Slab - NSI DSDM. The NSI recommends installing resin-backed stone with epoxy-based setting materials. Consult your setting materials manufacturer for specific recommendations.

Tech Notes: Epoxy fill is to be expected and is not considered a flaw in this material. Mesh backed use appropriate setting materials. Thickness variation may be up to 1mm. Material has distinctive veining that may crack or break with handling. Order an additional 10% overage as compared to other materials. Thickness varies not suitable for waterjet cutting. Resin or mesh-backed stone field tile must be installed with epoxy mortar or a combination of suitable primer and cement-based mortar. Consult your setting materials manufacturer for specific recommendations. Minor vein washout is possible in wet installations.

STONE

12" × 24" × ½" (2 sf/unit)
Honed Field Tile
Aris Edge

2CM (¾")
Polished Slab

INVISIBLE BLUE

Honed Trapezoid Mosiac

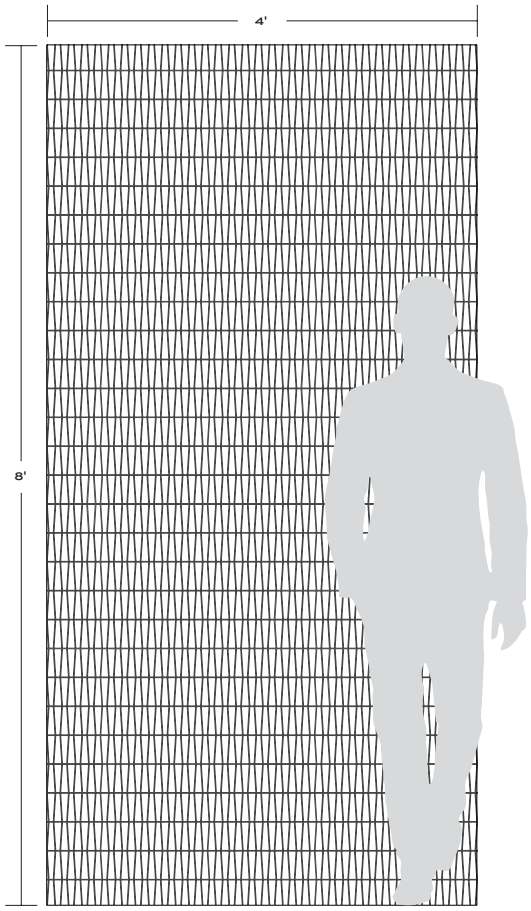

APPLICATIONS								
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	FIREPLACE SURROUND
Light/Medium Commercial	All	Yes, including steam [1]	Yes, including steam [1]	No	Yes, non-freeze thaw	No	Yes	Yes

VARIATION



TAILORED TO CUSTOMIZATION[8]

- CARPET CUTTING
- FIELD
- FINISH
- MOSAIC
- SADDLE
- VANITY TOP
- WATERJET

INSTALLATION/MAINTENANCE									
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT
Ardex X4 White Tile & Stone Mortar [2]	Ardex FG-C Microtec Unsanded [3]	As established on sheets	Ardex 8+9	Mapei Keracaulk Unsanded	AquaMix Sealer's Choice Gold	AquaMix Concentrated	TCNA Handbook	No	Required

AVAILABLE SIZES



HONED TRAPEZOID MOSAIC
11 11/16" × 12 13/16" × 3/8"
(1.04 SF/UNIT)

NOTES

[1] Showers: Product MUST be installed in accordance with current TCNA Handbook Stone Methods.
[2] Alternate Mortar - Mapei Ultraflex 2 White, or Mapei Adesilex P10 White w/Keraply Additive
[3] Alternate grout - Mapei Ultracolor Plus FA or Mapei Keracolor Unsanded

Tech Notes: Epoxy is to be expected and is not considered a flaw in this material. White mortar is recommended for natural stone.