


# OXO VERDIGRIS

---

Oxo Verdigris is a stunning recreation of atmospheric copper oxidation in a timeless Green Patina color with a matte finish. Stocked in 24" x 24" porcelain field tiles.



# OXO VERDIGRIS

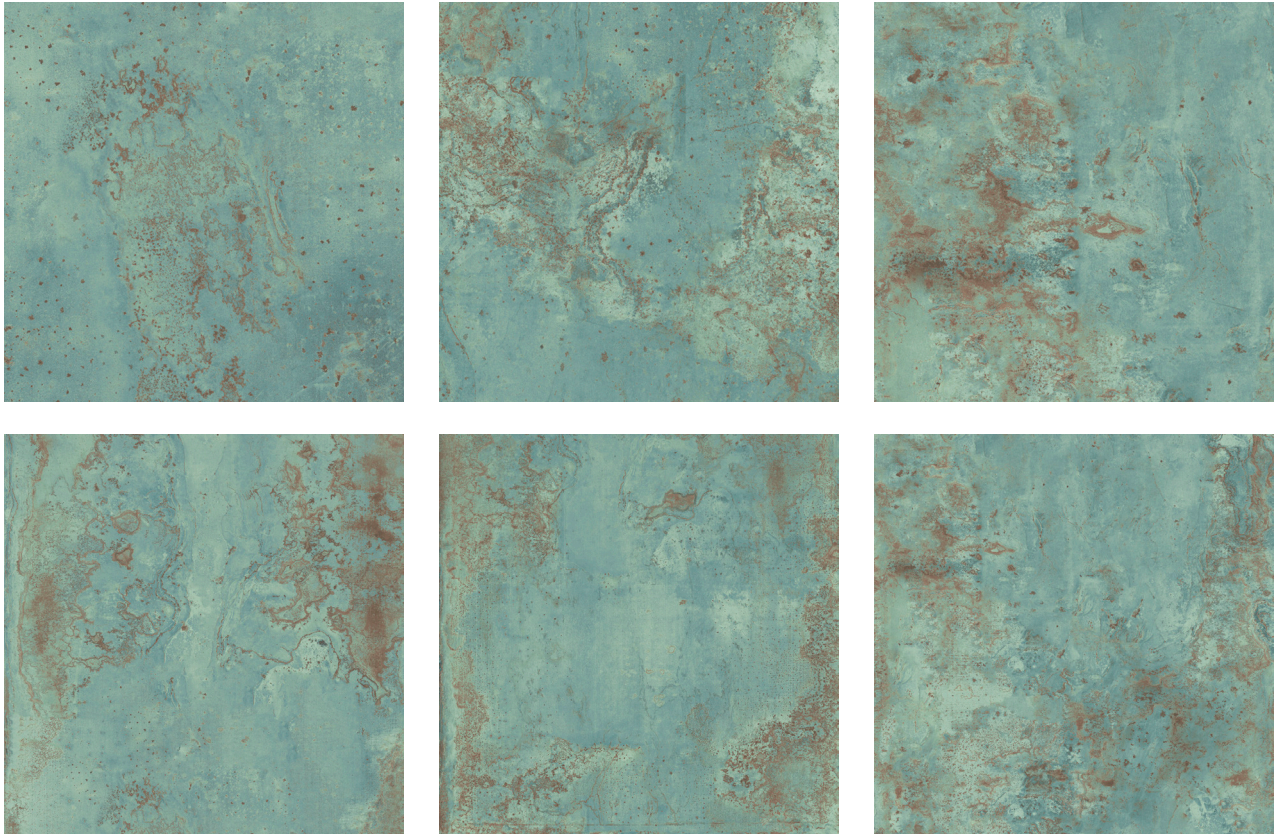

Oxo Verdigris Matte

APPLICATIONS								ATTRIBUTES		VARIATION				TAILORED TO CUSTOMIZATION	
INTERIOR FLOOR	INTERIOR WALL	SHOWER WALL	SHOWER FLOOR	EXTERIOR FLOOR	EXTERIOR WALL	POOL/ FOUNTAIN	COUNTER TOP	DCOF <sup>2</sup>						CARPET CUTTING	
Medium Traffic Commercial	All	Yes, including steam	Yes	No	Yes, including freeze thaw	Yes	No	0.74	0.76	FIELD					
										FINISH					
										MOSAIC					
										SADDLE					
										VANITY TOP					
										WATERJET					
INSTALLATION/MAINTENANCE										RECTIFIED FIELD TILE					
SETTING MATERIAL	GROUT	GROUT JOINT	MEMBRANE	CAULK	SEALER	CLEANER	INSTALLATION INSTRUCTIONS	LAYOUT	DRY LAYOUT						
Ardex X7 Microtec Fiber Reinforced Mortar <sup>2</sup>	Ardex FL Rapid Set Sanded <sup>3</sup>	1/8" minimum	Ardex 8+9	Ardex SX	AquaMix Grout Release	AquaMix Concentrated Stone & Tile Cleaner	TCNA Handbook	33% max. offset	Partial <sup>4</sup>	24" x 24" x 5/16" Matte					
NOTES															
<sup>1</sup> The standard requires a minimum wet DCOF Acutest value greater than 0.42 for ceramic tiles (inclusive of porcelain) for level interior spaces expected to be walked upon when wet. <sup>2</sup> Alternate mortar - Ardex X5 Medium Bed Mortar or Mapei Ultraflex LFT <sup>3</sup> Alternate grout - Mapei Flexcolor CQ or Mapei Ultracolor Plus FA <sup>4</sup> Layout for color and vein selection before installation. 30 faces Tech Note: Porcelains that meet the DCOF standard may have a more abrasive surface that might show dirt or debris. Remove with soap, water and firm scrubbing in order to clean. Consider this in the selection process.															