

GINGIBER'S  
CATNIP QUILT BONUS INSTRUCTIONS  
FOR LARGE CAT PANELS



FINISHED SIZE: 65"X56"

## Adapting Catnip Quilt pattern for larger cat panels

In addition to the fabric requirements listed on the pattern, you will need -

- 1- Large Catnip Cat panel
- 1- 3 1/2" x WOF strip of black fabric
- 1- 3 1/2" x WOF strip of white fabric

### Update the border lengths for larger quilt size

#### Grey Fabrics, cut:

- 5 strips 2 1/2" x WOF for borders
- sew strips together end to end and subcut into 2 - 2 1/2" x 56 1/2" strips
- and 2 - 2 1/2" x 61 1/2" strips for borders

## Getting Started

Read through all instructions before cutting fabrics.

All seams are 1/4"

WOF = Width Of Fabric (selvage to selvage)

RST = Right Sides Together

WS = Wrong Side

HST = Half Square Triangle

HRT = Half Rectangle Triangle

### Cutting Fabric

Large Catnip Panel  
center each cat and cut to 15 1/2" x 18"


- 3 1/2" x WOF black strip
- subcut into 4 - 3 1/2" x 3 1/2" squares
- and 8 - 3 1/2" x 2 3/4" rectangles

- 3 1/2" x WOF white strip
- subcut into 4 - 3 1/2" x 3 1/2" squares
- and 8 - 3 1/2" x 2 3/4" rectangles


### Making Half Square Triangles -

Using a 3 1/2" x 3 1/2" square of black fabric, begin making HST by placing a 3 1/2" square of white fabric on top with RST. Draw a line from upper left corner to bottom right corner and stitch 1/4" from the center line on both sides. Cut on drawn line in-between your stitch lines. You now have two HST blocks. Press towards dark fabric. Trim to make 3" x 3" HST blocks.

Repeat 4 times to make 8 HST blocks.

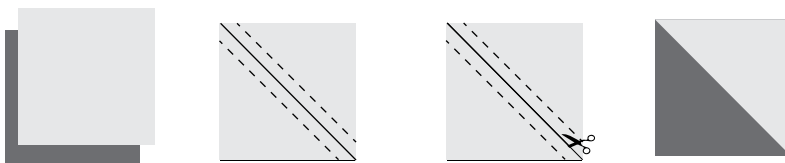


Arrange the HST blocks using the diagram on right. Sew blocks together to make 2 strip segments.

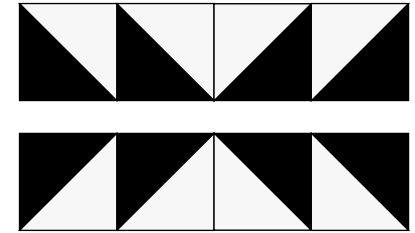


### Half Rectangle Triangles -

Using a 3 1/2" x 2 3/4" rectangle of black fabric, begin making HRT by placing a 3 1/2" x 2 3/4" rectangle of white fabric on top with RST. Using a rotary cutter, cut across diagonally from corner to corner. You will be making two HRT from this cut that will be the mirror of each other. Sew the white and black triangles together using a 1/4" seam allowance. Press towards dark fabric.

Repeat 4 times to make 8 HST blocks.

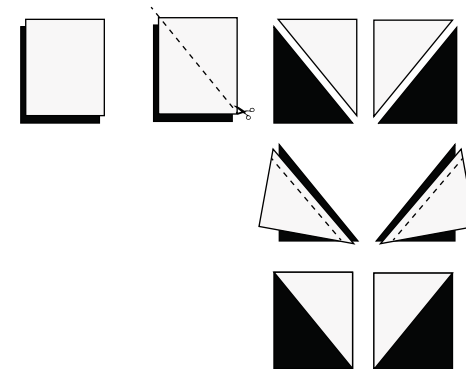

Arrange HRT blocks and sew into four segments below. Press seams open.

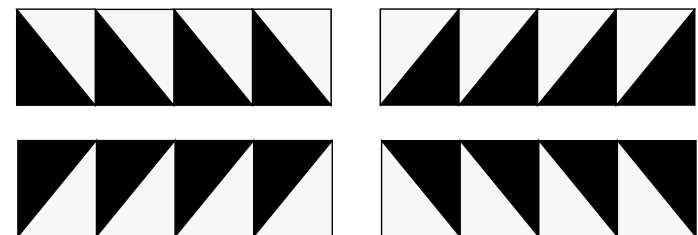

Continue following instructions from smaller quilt instructions. Skip the steps of figures fig. 7 and 8 and use quilt assembly diagram on the next page for quilt layout. Sections highlighted in red should be sewn into segments first, and then sewn into rows.

## Quilt Assembly

Referring to below diagram, sew all assembled blocks and sections together into rows, pressing all seams open. Sew rows and borders together and press seams open. The quilt center should measure  $52\frac{1}{2}'' \times 61\frac{1}{2}''$  including seam allowances. Next, sew on  $2\frac{1}{2}'' \times 61\frac{1}{2}''$  grey side borders to the left and right sides of the quilt top, and press seams toward the border. Sew on the last set of borders,  $2\frac{1}{2}'' \times 56\frac{1}{2}''$  grey strips to the top and bottom of quilt top, pressing seams toward the border.

Quilt and bind as desired.

