

City Select Folding Mechanism Instructions

NOTE: city select fold mechanism includes both sides and the H shaped frame piece indicated below.




How to Remove the Lower frame

Remove screws located in seat adapter on both sides (nut is on the inside, take care when removing the Frame and make sure they are in their housing when re-assembling)



Pull off lower section

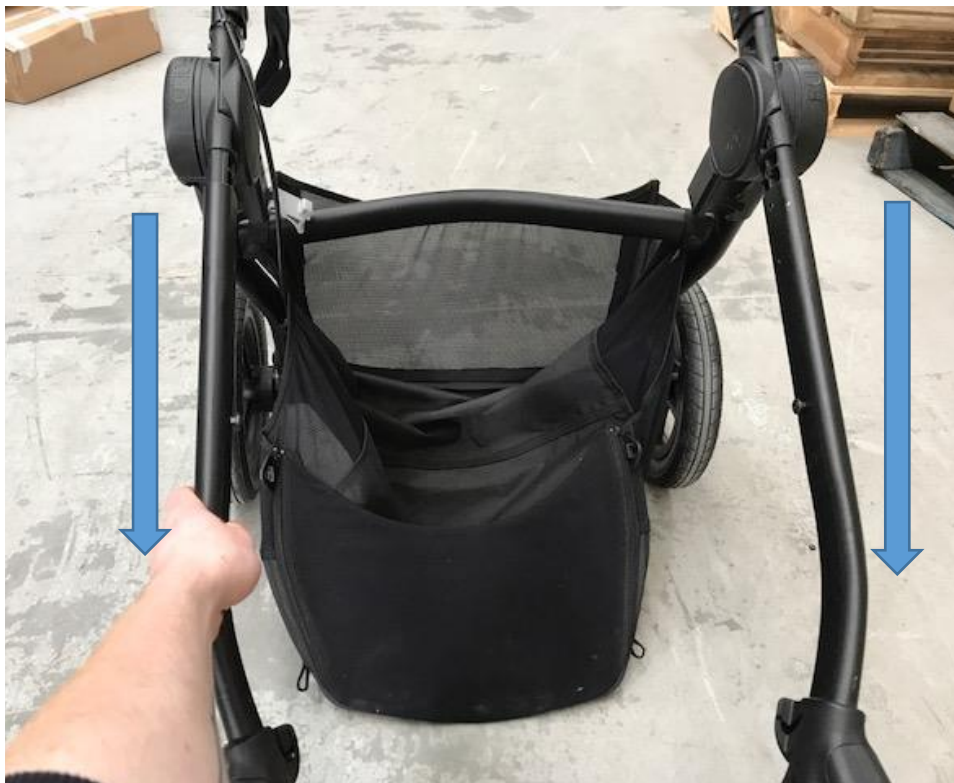

Lower section will come off frame



Make sure nuts stay in the frame as these are needed to screw the seat adapters back on.



How to Remove the Upper Frame

Remove screws from seat adapters on both side (nut is on the inside, take care when removing frame and make sure they are in their housing when re-assembling)



How to Remove the Brake Assembly



2 screws attach the brake near the bottom of the frame, one on each side.

1 screw near the hand brake to attach the hand brake.



Remove the original folding mechanism and replace with the new, then follow the above steps in reverse.