

STRONGERWELLNESS

FITNESSTILE CONNECT FIFTEEN
GYM FLOORING




Interactive Experience If you need more information you can click on the product and you will be redirected to the technical specifications.

THE CONNECT RUBBER TILES ARE HIGHLY DURABLE AND TOUGH.


The extremely dense top layer provides high impact protection against heavy weights dumbbells.

The sublayer and Impact bottom structure will absorb noise and provides a protection to the sublayer or screed. The tiles can be installed easily with the connectors system which comes with the tiles. The connectors will create almost invisible joints

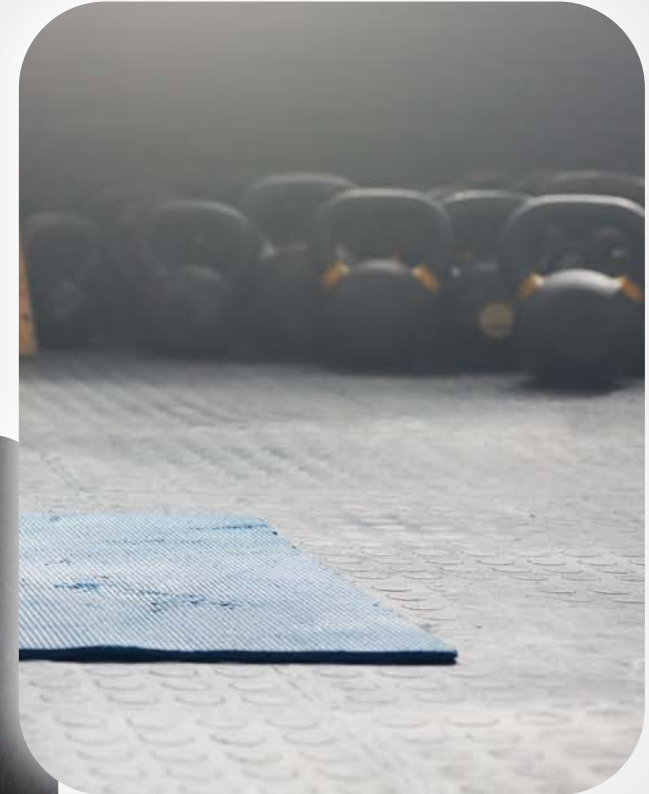

Technical Information

Bulk Density Toplayer	Approx. 1.400 kg/m ³	
Bulk Density Sublayer	Approx. 1.000 kg/m ³	
Shock Absorption	61%	EN14808
Vertical Deformation	5.0 mm	EN14809
Head Injury Criteria (HIC) Test	1.3 m	EN1177

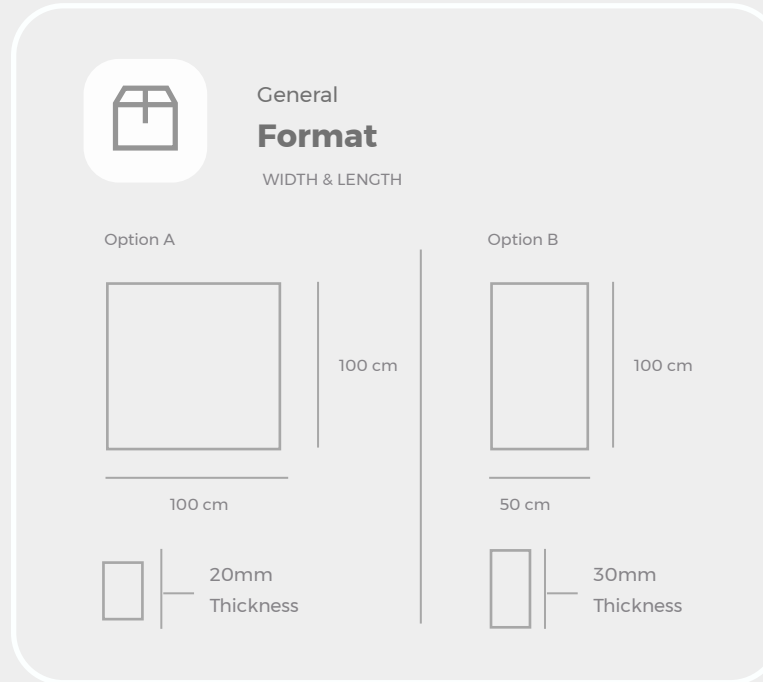

Installation

The tiles can be installed easily using the connector system, there is no need to glue the tiles. Edges can be covered with a stainless steel or aluminum profile. The tiles can easily be cut with a hand knife, we advise to use [hollow knives](#). Use a rubber hammer to close the joints on the connecting parts. You have to start with a straight line with a laser or a plumb bob for installing the first row of tiles. Do not start against the wall but leave a space of approx. 950mm between the wall and the first row of tiles. The tiles at the wall are the last you fit in and cut on size

Cleaning Instructions

The tiles have an extremely closed and dense surface. This surface makes the tiles easy to keep clean and maintain. Dust will not easily attach to the surface or get into pores. Depending a bit on the traffic the tiles can be kept clean by vacuuming and mopping the floor with the right equipment. It is possible to use a cleaning machine on this type of flooring, but it is very important that you use the right pads suitable for rubber flooring. Using the wrong pads will cause some excessive abrasion. Solvents & detergents; Do not use any solvents-based cleaners but use a neutral PH cleaner with warm water. When the flooring has just been installed, we advise to use a degreaser to clean the floor the first few weeks. For any advice on which detergent to use contact a professional cleaning company or a cleaner supplier. When a tile is heavily damaged or shows some abrasion, it is easy to take them out and replace them with a new tile. We advise to take on tile from the first batch and place the new tile somewhere in a less visible place.



Available
COLOUR



Grey



Green



Blue



Terracotta Red

*The appearance and color of these images may differ slightly from the final product.

*Samples available on request

Our

Materials

The Surface

Cut from high density rubber roll flooring in SBR and EPDM.



The Base

Made of recycled rubber and EPDM.

The Bottom

Connect patented impact bottom design, good for shock absorbent and impact sound. The pattern on the bottom provides holes for the connector system. The tiles are being produced in a single process which vulcanizes the top layer on the bottom in one step.

Product Imagery

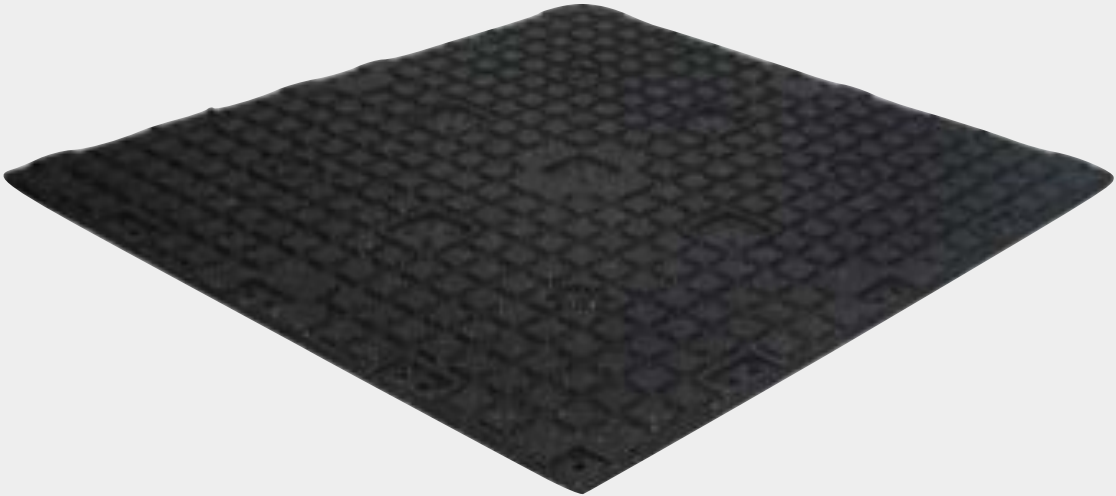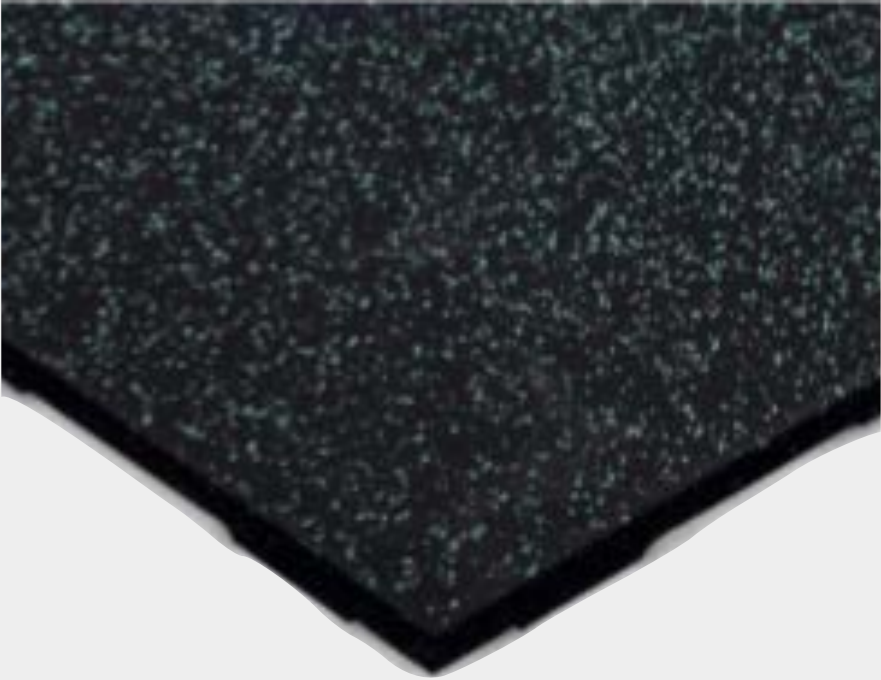

THANKS!



For more information

Call us | Write us