


## GROUP-X ACTIVITIES


The unique solution for aerobic and group-x areas

A studio floor that meets all requirements; reduction of injuries, shock absortion and point elasticity, friction specially for group-x and avoid marks on the floor.

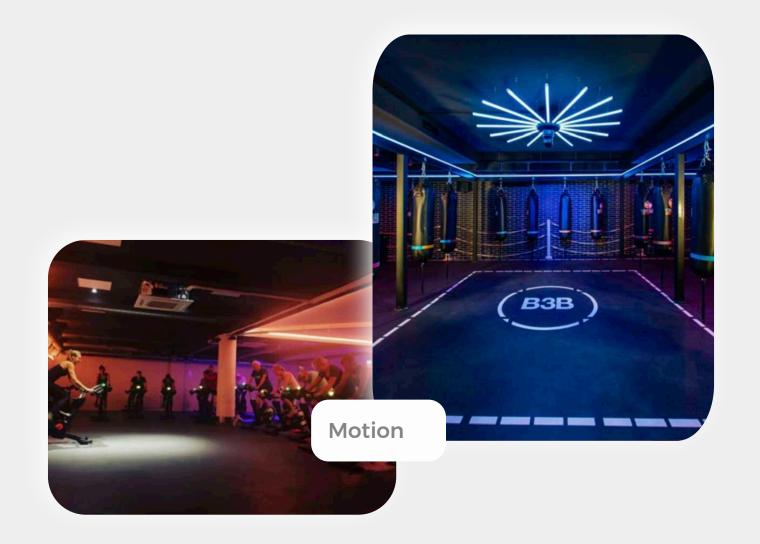

## **Technical Information**

Weight		7 kg	
Density	UNE-53526	860 kg/m3	
Hardness	Din 53505	75° Sh A	
% water absorption	ASTM D570	0%	
Coef. Linear dilatation	0° C-40°C	1,5 10-40 °C-1	
Fire Classification	EN 13501-1	Cfl-s2	
Abrasion resistance	EN-5470	614 mg	
Shock absorbance	EN 14808	30%	
Coefficient of friction	EN 13036	95	

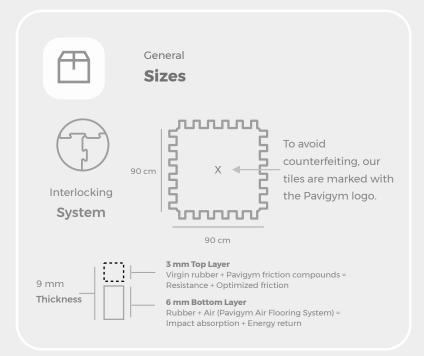

## **Comparative Chart**

	OUR MOTION	WOODEN SPRING	LINOLEUM (PVC)
Comfort and Wellness	****	+++	+++
Shock Absorptions	***	++++	++
Movement protection (Slip/blocking)	****	+++	+++
Sound Insulation	****	+++	++
Thermal Insulation	****	++++	***
Durability	****	++	+++
Water resistance	****	++++	++
Easiness and short installation time	****	+++	++
Damaged area replacement (modularity)	++++	+	+



## THANKS!



For more information

Call us | Write us