




**LaSalle Bristol**  
A Heywood Williams Company

**IF EQUIPPED**

**#742003 OUTSIDE SHOWER HOSE  
REPLACEMENT INSTRUCTIONS**

1. Wrap hose counter clock wise around faucet three (3) times.
2. Lay shower head with the face plate facing down. The back of the shower head will lay under the bracket.

REFERENCE DRAWING BELOW:

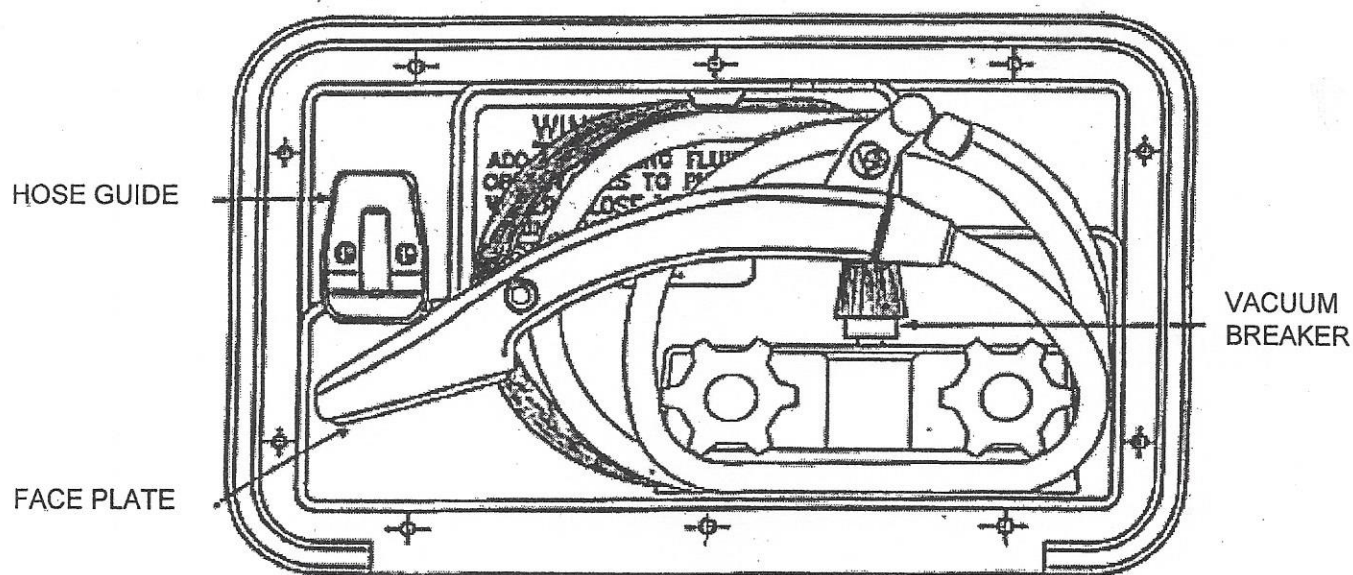

**Please use care when using the shower hose. It is connected to the faucet through a code approved vacuum breaker. Breakage of the vacuum breaker through customer abuse is not covered under warranty. Replacement vacuum breakers are available. Part #25L53VAC.**

**Your *First* Source**