




# PRODUCT SPECIFICATIONS

## 8-TEMP THERMOLABEL<sup>®</sup> Temperature Indicators

Our 8-Temp Thermolabel features eight incremental temperature sensitive elements that produce a non-reversible white to black color change at their rated temperatures. This provides a clear indication of which temperature has been reached. Store in a cool, dry place; preferably under refrigeration.


Unit of Measurement	Package
Labels Per Package	16
Country of Manufacture	USA

Dimensions	1/2" x 2 1/4"
Waterproof	Yes
Response Time	Approximately 10 seconds
Product Expiration	1 year for products containing 90-110°F 2 years for products containing 115-500°F
Indication Method	Non-toxic white to black color change

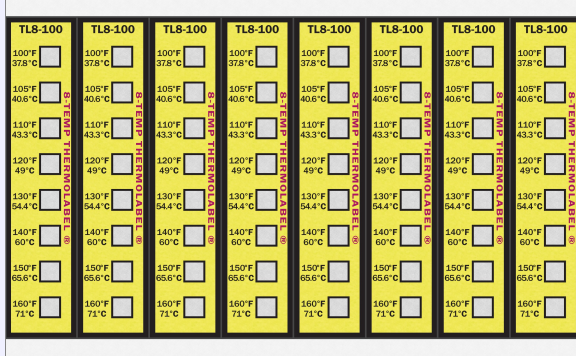

<b>TL8-100</b>	100°F	105°F	110°F	120°F	130°F	140°F	150°F	160°F
	37.8°C	40.6°C	43.3°C	49°C	54.4°C	60°C	65.6°C	71°C
<b>TL8-130</b>	130°F	140°F	150°F	160°F	170°F	180°F	190°F	200°F
	54.4°C	60°C	65.6°C	71°C	77°C	82°C	88°C	93°C
<b>TL8-170</b>	170°F	180°F	190°F	200°F	210°F	220°F	230°F	240°F
	77°C	82°C	88°C	93°C	99°C	104°C	110°C	116°C
<b>TL8-210</b>	210°F	220°F	230°F	240°F	250°F	260°F	270°F	280°F
	99°C	104°C	110°C	116°C	121°C	127°C	132°C	138°C
<b>TL8-250</b>	250°F	260°F	270°F	280°F	290°F	300°F	310°F	320°F
	121°C	127°C	132°C	138°C	143°C	149°C	154°C	160°C

<b>TL8-290</b>	290°F	300°F	310°F	320°F	330°F	340°F	350°F	360°F
	143°C	149°C	154°C	160°C	166°C	171°C	177°C	182°C
<b>TL8-330</b>	330°F	340°F	350°F	360°F	370°F	380°F	390°F	400°F
	166°C	171°C	177°C	182°C	188°C	193°C	199°C	204°C
<b>TL8-370</b>	370°F	380°F	390°F	400°F	410°F	420°F	435°F	450°F
	188°C	193°C	199°C	204°C	210°C	216°C	224°C	232°C
<b>TL8-410</b>	410°F	420°F	435°F	450°F	465°F	480°F	490°F	500°F
	210°C	216°C	224°C	232°C	241°C	249°C	254°C	260°C

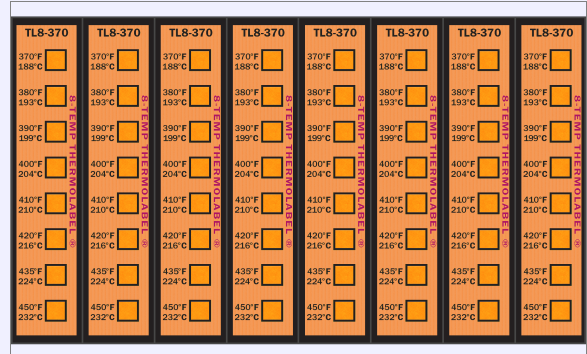

### Product Instructions:

Remove label from sheet. Adhere to a clean surface. Press firmly and ensure that there is full contact with the test surface. Heat/run through procedure that is being tested. The gray/white temperature sensitive elements will turn black as the rated temperature is reached. The highest temperature reached will be between the last black temperature element and the first gray/white temperature element. Allow to cool to the touch before slowly peeling the label off the test surface to avoid leaving adhesive residue.

**Please contact us with any questions about these or any other Paper Thermometer products.**

Paper Thermometer Company Inc.  
62 Colin Dr | Manchester NH 03103 | USA

1-877-PTLABEL | t: 603-547-2034

[sales@paperthermometer.com](mailto:sales@paperthermometer.com) | [www.paperthermometer.com](http://www.paperthermometer.com)

