

Delock External Enclosure for 2.5" SATA HDD / SSD with SuperSpeed USB 10 Gbps (USB 3.1 Gen 2)

Description


This aluminum enclosure by Delock can be used for the installation of a 2.5" SATA hard drive or SSD. Despite the slim design, hard disks up to a height of 9.5 mm can be installed.

Full speed due to SuperSpeed USB 10 Gbps

Due to the VIA chipset, this hard disk enclosure supports SuperSpeed USB with up to 10 Gbps transfer speed. Thus, the full SATA 6 Gb/s transfer rate of the hard disk can be exploited.

Full connectivity due to USB Type-C™ port

The external enclosure is connected to a PC or laptop via a USB Type-C™ female port installed on the housing. The included USB Type-C™ to USB Type-A cable allows the connection to a free USB Type-A female port. Of course, the enclosure can also be connected via an optional USB Type-C™ cable to a free USB Type-C™ female port or a free Thunderbolt™ port.

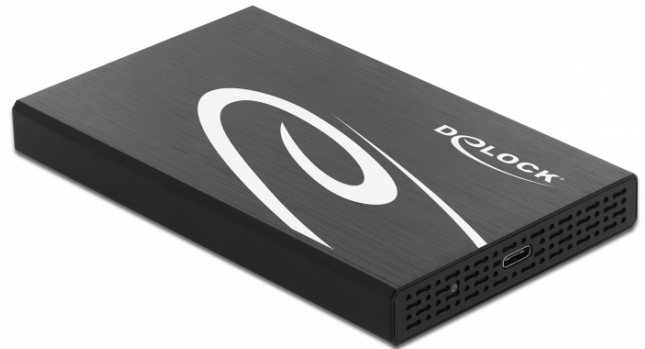

Specification

- Connectors:
 - external: 1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
 - internal: 1 x SATA 6 Gb/s 22 pin receptacle
- Suitable for 2.5" SATA HDD / SSD:
 - HDD height up to 9.5 mm
 - SATA HDD / SSD up to 6 Gb/s
 - supports 5 V HDD / SSD
 - HDD / SSD up to 4 TB
- Chipset: VIA VL716
- Data transfer rate up to 6 Gb/s
- Supports UASP
- LED indicator for power and access
- Robust aluminum housing
- Colour: black
- Dimensions (LxWxH): ca. 131 x 80 x 15 mm
- Hot Swap, Plug & Play

System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC or laptop with a free USB Type-A port

Package content

- 2.5" external enclosure
- Cable USB-C™ male to USB Type-A male, length ca. 46 cm
- Screwdriver
- Foam spacer
- User manual

Item no. 42611

EAN: 4043619426119

Country of origin: China

Package: • Retail Box



Images



General	
Function:	Hot Swap Plug & Play
Suitable for data medium:	2.5" SSD or HDD height up to 9.5 mm
Supported operating system:	Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 or above
Interface	
External:	1 x SuperSpeed USB 10 Gbps (USB 3.1 Gen 2) USB Type-C™ female
Internal:	1 x SATA 6 Gb/s 22 pin
Technical characteristics	
Chipset:	VIA VL716
Data transfer rate:	SuperSpeed USB 10 Gbps
Physical characteristics	
Housing material:	Aluminium
Cable length:	46 cm
Length:	131 mm
Width:	80 mm
Height:	15 mm
Colour:	black